


22260800	DATA SHEET	
Valid from: 17.09.2018	AB-ASI-J-Y-N-M12FS	

Description

- AS-interface distributor
- For tapping of one flat cable on straight M12-jack, A-coded



General characteristics

Connection method	AS-i piercing technology
Number of pins	M12-jack, straight, A-standard
Ambient temperature	2
	-25 to +75 °C (-13 to 167 °F) (operation)
	-25 to +85 °C (-13 to 185 °F)
	(storage/transportation)
Degree of protection	IP 65 / IP 67 / IP 69K

Electrical properties

Rated voltage (III/3)	≤ 35 V
Rated current at 40 °C	4 A

Mechanical properties

AS-i-distributor

Housing, material	PA-GF black
Contact, material	CuZn
Contact surface, material	Ni/Au
Contact carrier, material	TPE-U
Screw connection, material	stainless steel
Tightening torque (screw)	1.65 Nm

M12-jack


Contact, material	CuSn
Contact surface, material	Ni/Au
Contact carrier, material	TPE-U
Screw connection, material	Zinc diecasting, Ni plated
Tightening torque (M12-jack)	0.4 Nm

Creator: ERTC1/PDP Released: IVSE1/PDP	Document: DB22260800EN Version: 03	Page 1 of 2
---	---------------------------------------	-------------

22260800	DATA SHEET	
Valid from: 17.09.2018	AB-ASI-J-Y-N-M12FS	


Technical drawing

Drawing

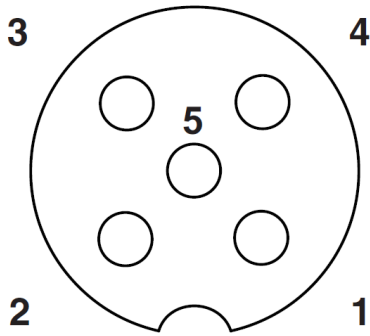

M12-jack → PIN 1: AS-i +, PIN 3: AS-i -,
PIN 2, 4, 5: not used

Dimensional drawing

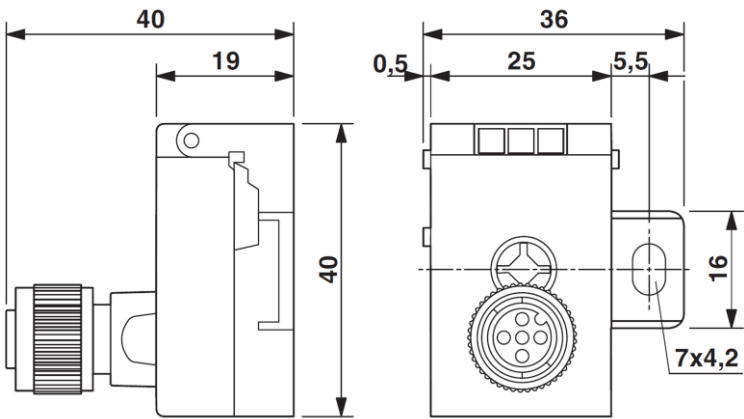

Standards / Approvals

Product standard, M12 connector

IEC 61076-2-101

Application range

Automation, industrial machinery and plant engineering

Note

Photographs are not true to scale and do not represent detailed images of the respective products

Creator: ERTC1/PDP Released: IVSE1/PDP	Document: DB22260800EN Version: 03	Page 2 of 2
---	---------------------------------------	-------------