


22260802	DATA SHEET	
Valid from: 17.09.2018	AB-ASI-J-Y-Y-N	

Description

- AS-interface H-distributor
- For the distribution of one on two flat cables



General characteristics

Connection method	AS-i piercing technology
Number of pins	4
Ambient temperature	-25 to +75 °C (-13 to 167 °F) (operation) -25 to +85 °C (-13 to 185 °F) (storage/transportation)
Degree of protection	IP 65 / IP 67 / IP 69K

Electrical properties


Rated voltage (III/3)	≤ 35 V
Rated current	≤ 8 A

Mechanical properties

Housing, material	PA-GF black
Contact, material	CuZn
Contact surface, material	Ni/Au
Contact carrier, material	TPE-U
Tightening torque (min.)	1.65 Nm

Technical drawing

Dimensional drawing

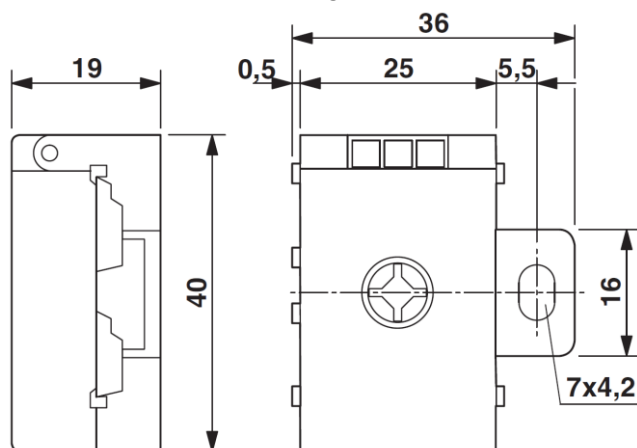

Application range

Automation, industrial machinery and plant engineering

Note

Photographs are not true to scale and do not represent detailed images of the respective products.

Creator: ERTC1/PDP Released: IVSE1/PDP	Document: DB22260802EN Version: 03	Page 1 of 1
---	---------------------------------------	-------------