


|                           |                                  |   |
|---------------------------|----------------------------------|---|
| 10399400                  | <b>DATA SHEET</b>                |  |
| Valid from:<br>18.09.2018 | <b>EPIC® MCS 0 / MCB 0 BLIND</b> |   |

### Description

- The mixed assembly guarantees high flexibility. For applications in mechanical and plant engineering, for printing machines and slide-in technology.
- Assembly of individual connectors, suitable for different applications



### General Characteristics


|                   |  |
|-------------------|--|
| Series            | MC Module                                |
| Version           | Male / Female (Article 10399500)         |
| Temperature Range | -40°C to +100°C, short-term up to +125°C |

| Artikel No. | Module | VPE |
|-------------|--------|-----|
| 10399400    | Male   | 10  |
| 10399500    | Female | 10  |


### Technical Drawing




M

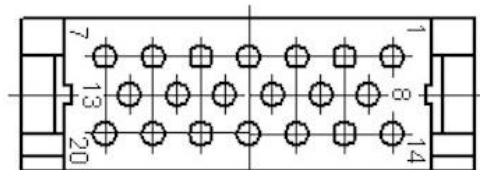

F

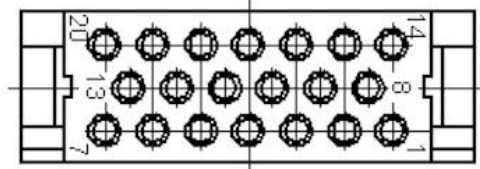

|                           |                                  |   |
|---------------------------|----------------------------------|---|
| 10399400                  | <b>DATA SHEET</b>                |  |
| Valid from:<br>18.09.2018 | <b>EPIC® MCS 0 / MCB 0 BLIND</b> |   |



Automation



Industrial machinery and plant engineering



Wind Energy

### Info

Dummy module as a placeholder for future expansion

### Application range

Plant engineering  
Printing machines  
Control engineering

### Remark

Photographs are not to scale and do not represent detailed images of the respective products.

|   |                                       |             |
|---|---------------------------------------|-------------|
| Creator: MANA2/PDP<br>Released: IVSE1/PDP | Document: DB10399400EN<br>Version: 01 | Page 2 of 2 |
|---|---------------------------------------|-------------|