DATA SHEET

Valid from: 31.08.2023 EPIC® POWER M12



Description:

- Circular connector for servo engines and power supply
- Angled version with cable grommet for cables from 8 mm to 10 mm
- High-grade gold-plated contacts



Male connector

Female connector

Product variants:

Article number	Туре	Pin arrangement	Cable grommet
44423142	Male, angled cable connector	3+PE S-Coded	8 mm - 10 mm
44423143	Female, angled cable connector	3+PE S-Coded	8 mm - 10 mm

General characteristics:

Series POWER M12 Coding S-Coded

Type Angled male / female cable connector

Pin configuration 3+PE Rated voltage (V) 630 V Rated impulse voltage (V) 6 kV Degree of soiling 3 Overvoltage category Ш Insulation material group female Ш Insulation material group male Ш 12 A Rated current (A) Contact resistance $\leq 5 \text{ m}\Omega$

Termination methods Screw clamp termination up to 1,5 mm² (AWG 16)

Cable clamping range 8 mm - 10 mm

Protection IP 67 according to IEC 60529

Cycles of mechanical operation >100

Temperature range -40°C to +85°C
Tightening torque 0,6 Nm (M12 knurl)

Material/surface:

Contacts CuZn (Brass)
Contact plating Au (Gold)
Material insulation body PA (Polyamid)

Standards:

Product standard DIN EN 61076-2-111
Safety Standard UL2238, CSA 22.2 182.3

Creator: STKU3/PDP	Document: DB44423142EN	Page 1 of 3
Released: IVSE1/PDP	Version: 02	

44423142 DATA SHEET Valid from: 31.08.2023 EPIC® POWER M12

Approvals:

UL-File Number


E249137



Technical drawing:


Pin-arrangement:

Male, angled connector

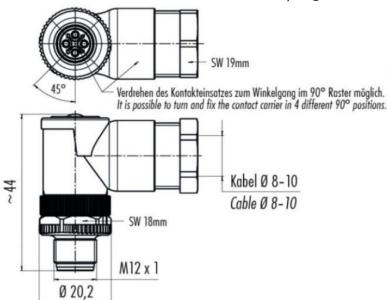



Female, angled connector

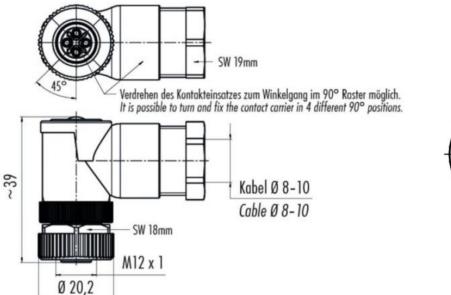




Creator: STKU3/PDP	Document: DB44423142EN	Page 2 of 3
Released: IVSE1/PDP	Version: 02	

44423142	DATA SHEET	& I ADD
Valid from: 31.08.2023	EPIC® POWER M12	WLAPP

Assembly instruction:

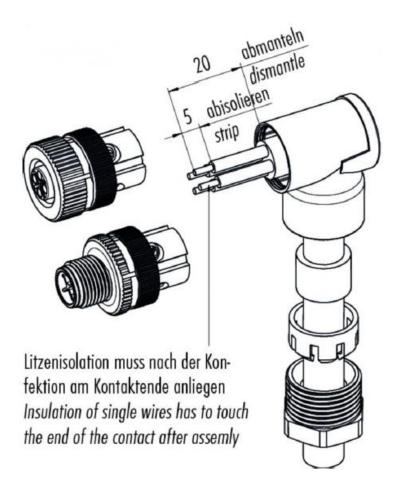

Application range:

Power supply for compact engines.

Remark:

Photographs are not to scale and do not represent detailed images of the respective products. Further information can be found in the product standard.

Creator: STKU3/PDP	Document: DB44423142EN	Page 3 of 3
Released: IVSE1/PDP	Version: 02	