

EPIC® SENSORS W-5802

Compact resistance temperature sensor with transmitter

Features

- temperature range -60...+450 °C, temporarily +550 °C
- temperature range for transmitter -40...+85 °C
- integrated mA transmitter
- output current signal 4...20 mA
- miniature transmitter
- programmable transmitter configurations
- programmable sensor fault indication
- linear temperature measurement
- RTD sensor
- Pt 100, accuracy class A as standard delivery
- 4-pin M12 plug
- bendable MI cable structured sensor element
- material AISI316/AISI 316L
- vibration proof
- durable steel enclosure
- 3D step model available on request.

Typical applications

- temperature measurement
- requirements for minimal space usage.




Technical data

Materials	AISI 316/AISI 316L, maximum temperature +450 °C, temporarily +550 °C
Sensor element	MI cable with diameter 3 or 6 mm, other diameters on request
Connector	4 pin, A coded M12 plug
Transmitter	Manufacturer PR electronics, model PR 5802 A2A2 or PR 5802 A2A3
Operation voltage	8,0... 35 VDC
Power loss	25 mW... 0,8 W
Response time	0,33... 60 s
Output signal	4... 20 mA
Tolerances Pt 100 (IEC 60751)	A tolerance $\pm 0.15 + 0.002 \times t$, operating temperature -100...+450 °C B tolerance $\pm 0.3 + 0.005 \times t$, operating temperature -196...+600 °C B 1/3 DIN, tolerance $\pm 1/3 \times (0.3 + 0.005 \times t)$, operating temperature -196...+600 °C B 1/10 DIN, tolerance $\pm 1/10 \times (0.3 + 0.005 \times t)$, operating temperature -196...+600 °C
Temperature range	Temperature measurement range -60...+450 °C, temporarily +550 °C (Note: transmitter temperature range -40...+85 °C)
Quality certificate	ISO 9001:2015 and ISO 14001:2015 issued by DNV
IP rating	IP65, higher IP rating on request


EPIC® SENSORS W-5802

Compact resistance temperature sensor with transmitter

Connections 2-wire installation

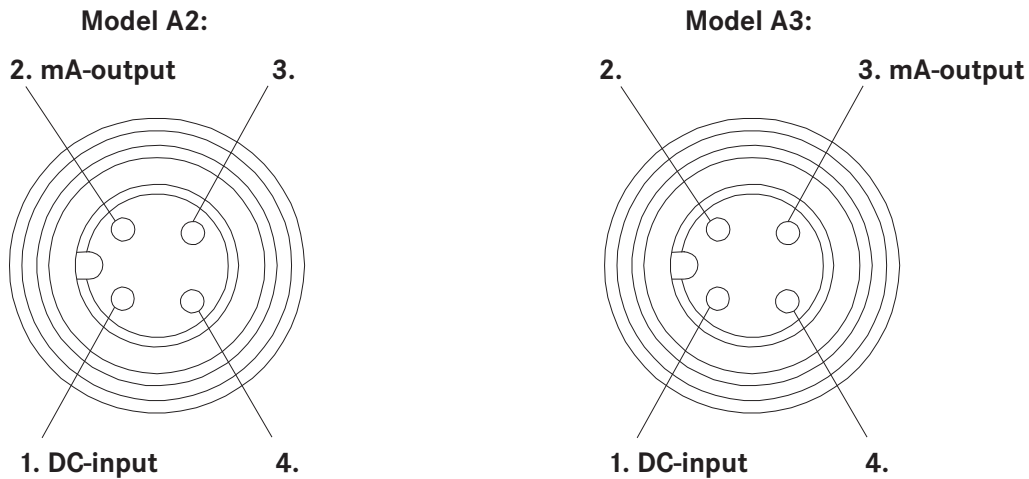

Drawing

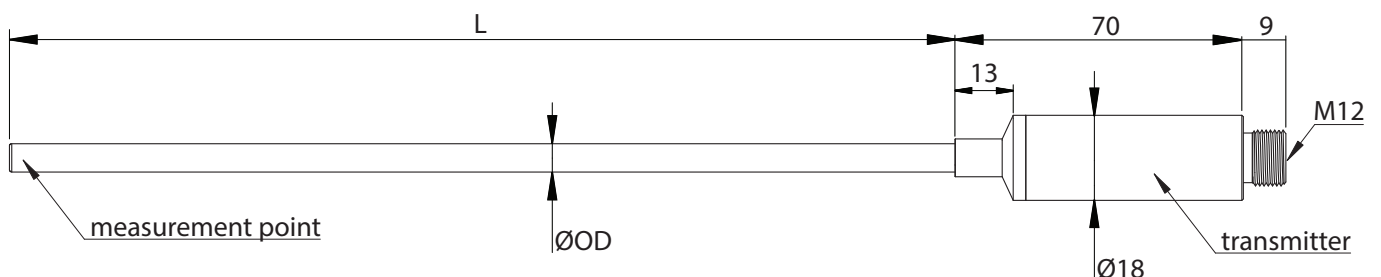

Product code key

Example code: W — 5802 — A2 — M — 6 / 300 — A — M12 — X

W	= Pt100 resistance temperature sensor
5802	= transmitter type (constant in code)
A2	= transmitter model
A3	(PR 5802 A2A2 or PR 5802 A2A3)
M	= mineral insulated sensor (constant in code)
3, 6	= outer diameter of sensor element (ØOD) [mm] (other diameters on request)
300	= MI cable length, L [mm]
A, B	= Pt100 accuracy class, (class A as standard delivery)
M12	= connector
X	= additional details on the text line

