DATASHEET

EPIC® SENSORS Adjustable flanges

Features

- temperature ranges up to +300 °C
- adjustable height, facilitates the installation and replacement of the temperature sensor element
- polished aluminium or cast steel with black powder lacquer coating, other materials on request
- with or without counter flange
- for element sizes Ø6mm, Ø15mm, Ø22mm and Ø32mm
- fitting to process with bolts, or welding
- 3D step models available on request.

Typical applications

- energy and power plant technology
- process industry
- · chemical industry
- · machinery and vessel construction
- manufacturing industry.



Technical data

| Materials | polished aluminium, maximum temperature +300 °C, temporarily +350 °C, cast steel with lacquer coating, maximum temperature +300 °C, temporarily +350 °C, PTFE ring, maximum continuous temperature +260 °C, temporarily +300 °C, Other materials on request |
|--------------|---|
| Element size | Ø6mm, aluminium flange, bolt fitting only Ø15mm, cast steel flange, with or without counter flange Ø22mm, cast steel flange, with or without counter flange Ø32mm, cast steel flange, with or without counter flange Other sizes on request |

Installation examples










DATASHEET


EPIC® SENSORS Adjustable flanges

Drawing

For Ø6mm sensor element, aluminium, bolt fitting only, product code 5052098

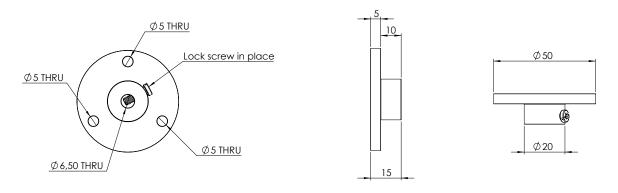

For Ø15mm, Ø22mm or Ø32mm sensor element, cast steel, bolt fitting only, no counter flange



| Product Code | Ød [mm] | Ød₁ [mm] | D [mm] | L[mm] |
|---------------------|---------|----------|--------|-------|
| 1018378 | 15 | 16 | 27 | 55 |
| 1018382 | 22 | 23 | 33 | 70 |
| 1018383 | 32 | 33 | 39 | 70 |

where


L = bolt distance,

Ød = diameter of sensor element,

 $\emptyset d_1$ = diameter of slot,

D = neck dimension

For Ø15mm, Ø22mm or Ø32mm sensor element, cast steel, weld fitting, with counter flange

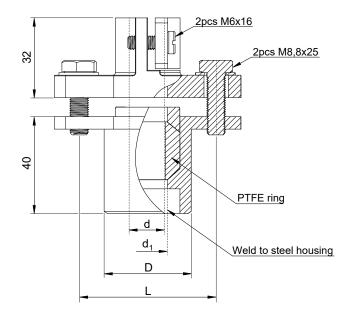

| Product Code | Ød [mm] | Ød₁[mm] | D [mm] | L[mm] |
|---------------------|---------|---------|--------|-------|
| 911984 | 15 | 16 | 35 | 55 |
| 911985 | 22 | 23 | 40 | 70 |
| 911986 | 32 | 33 | 50 | 70 |

where

L = bolt distance,

Ød = diameter of sensor element,

 $\emptyset d_1 = \text{diameter of slot},$

D = neck dimension