DATA SHEET Valid from:



For wire and cable identification. Mounted in FLEXIMARK® collars. Delivered on perforated sheets designed for laser printing. UV-resistant.

FLEXIMARK® LMB



Technical data:

21-01-2019

Material: Polyester, halogen free, UV-resistant

Α5

Operating temperature: -40°C to +125°C

Sheet size:

Colour: Yellow/White Recommended storage: 21°C and 50% RH

Mounting:

Mounted in FLEXIMARK® collars.

Other product data:

ETIM Classification: EC001288

Advantages:

Supplied as punched and perforated A5 sheets.

Printed in standard office laser printers, both sides are printable.

Easy mounting.

DATA SHEET

Valid from: 21-01-2019

FLEXIMARK® LMB




Product data:

E-nr.	LAPP Part no.	Article designation	Size/ Label WxH mm	colour	Content (sheet)	Content /unit	PU
2972084	83254680	LMB 30x4.6 mm ye/wh	30x4,6	Yellow/White	48	480	1

Related products

FLEXIMARK® LMB labels can be printed using FLEXIMARK® Software and an office laser printer. Select label in the label selector in the program, add to the table what to print, select printer and print.

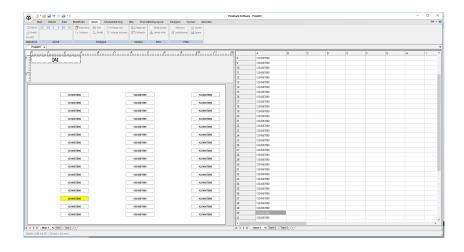



FLEXIMARK® Collar Snap-On for simple and effective snap-on mounting. Comes in different sizes.



Note:

Pictures are not to scale and do not represent detailed images of each product.

Creator: Fleximark/LR	Document: DB83254680EN FLEXIMARK LMB Version: 01	Page 2 of 2
-----------------------	---	-------------