


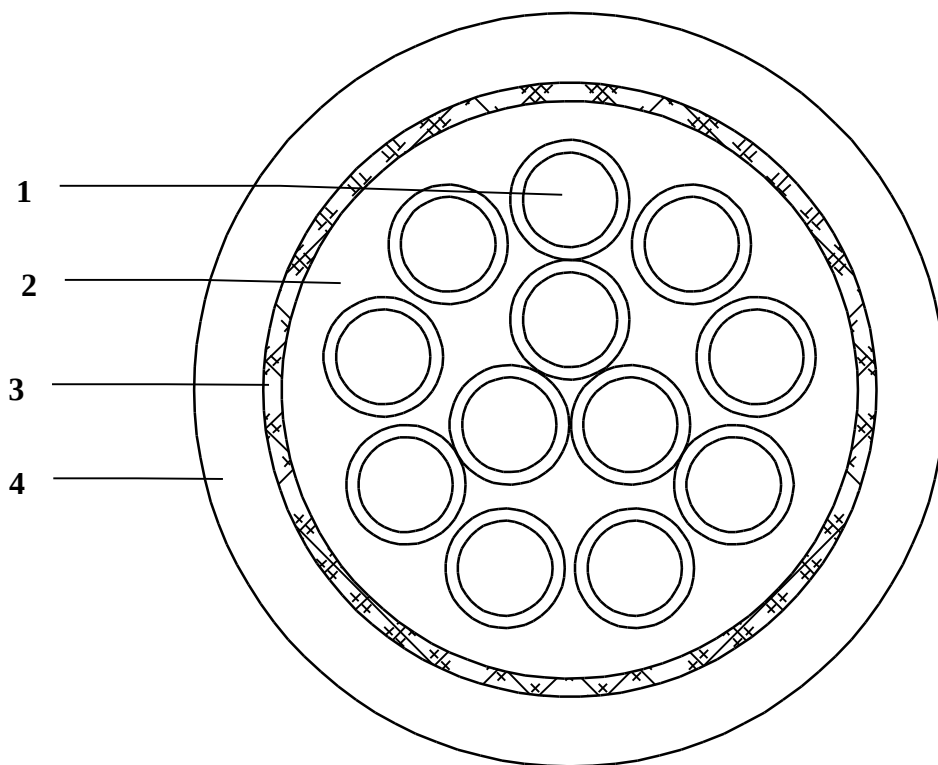

Rep.	Components description	Dia.mm	Features
1	12 – 6 mm ² conductors, extra flexible in red copper Insulation in polyester	4.3	<u>Electrical characteristics</u> Conductors operating voltage : 0.6/1kVolts Conductors linear resistance at 20 °C ≤ 3.47 Ω/km <u>General characteristics</u> Theoretical breaking strength : 2000 daN Operating temperature : -20 to +80 °C Dynamic bending radius ≥ 250 mm (monospiral reeler without pulley) Linear weight in air : 1.20 kg/m Outside diameter : 27 ± 1.4 mm Cores identification : 6 mm ² : White numerated Sheath colour : Black
2	Inner jacket in polyurethane	20.8	
3	Aramid fiber braid		
4	Outer sheath in polyurethane	27	

This document belongs to LAPP MULLER SAS and can not be used without prior authorisation

D						
C						
B						
A	15/11/12	CREATION	S.L		A.B	
Revision	Date	Revision Description	Written by	VISA	Checked by	VISA