



EPIC® ULTRA H-B 16 TS QB

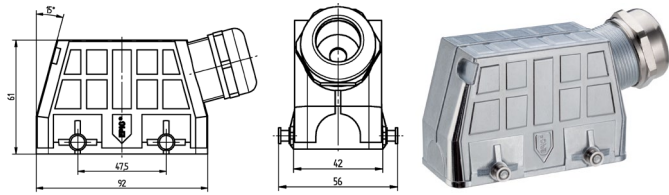

EPIC® ULTRA H-B 16 AG QB

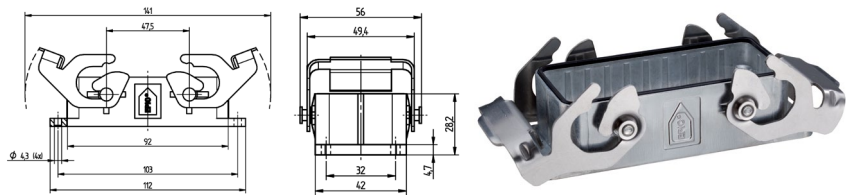

Info

- EMC protection
- Corrosion-resistant
- SKINTOP® integrated cable gland

Info

- EMC protection
- Corrosion-resistant
- SKINTOP® integrated cable gland

Benefits

- Optimum, low-resistance 360° screening
- All-purpose due to high corrosion resistance and high environmental protection.
- Space-saving due to compact dimensions
- Faster than any other comparable system
- High mechanical resistance

Application range

- Construction machinery
- In EMC-sensitive environments
- For fixed and flexible applications (e.g. machinery building, wind turbines)
- Electric motor manufacturing

Product features

- Housings with the BRUSH addition come with BRUSH cable screen contacting
- Pluggable with standard housings
- Corrosion-resistant according to DIN EN 6988
- Resistance to cyclic salt spray is tested according to IEC 68-2-52, severity level 2
- Salt spray testing according to DIN EN ISO 9227, method NSS, period of test 480 hours

Suitable inserts

- Refer to Selection Table A 10 to select the required inserts and housings

Technical data

Material
 Housing: nickel-plated zinc die-casting
 Lever and bolts: stainless steel
 Sealing: NBR
 Cable gland
 Body: nickel-plated brass
 Insert: PA
 Seal: special elastomer

IP Protection rating
 IP 68

Temperature range
 -40°C to +100°C

Article number	Article	Cable clamping range (mm)	Minimum Ø above braiding (mm)	Pieces / PU
H-B housing: hood (side cable entry, bolts for double lever)				
70250214	ULTRA H-B 16 TS QB 7-15	7 - 15		1
70250215	ULTRA H-B 16 TS QB 11-21	11 - 21		1
70250216	ULTRA H-B 16 TS QB 11-21 BRUSH	11 - 21	8	1
H-B housing: panel-mount base (double lever)				
70250217	ULTRA H-B 16 AG QB			1

Photographs are not to scale and do not represent detailed images of the respective products.