

ÖLFLEX® 408 P/409 P

Power and control cables with polyurethane outer sheath



LAPP GROUP

ÖLFLEX® power and control cables for harsh conditions

The diverse range of cables in the ÖLFLEX® 400 and 500 series is composed of numbered control cables and colour-coded power cables for harsh areas of application. In applications with increased mechanical requirements, in particularly oily environments and even at very low temperatures, where conventional cables such as those with a PVC outer sheath quickly reach their limits, ÖLFLEX® polyurethane cables come into their own. According to the area of application, this cable range offers tailored solutions with staggered product performance. We optionally provide a number of versions with or without copper screening to maintain the EMC (electromagnetic compatibility). See our latest main catalogue for more details.

| Power and control cables for harsh conditions | | | | | | | | | | | | | | | | | | | | |
|--|------------------------|----------------|-----------------|------------------------------|-------------------------|--------------------------------------|-------------------------------------|---|---------------------------------|--------------|-------------------------------|-------------------------------------|-------------------|-------------------|----------------------|---------------------------|---------------------------|----------------------------|---------------------------------------|--|
| | Black cores - numbered | Coloured cores | Copper braiding | Co-extruded functional layer | Enhanced oil resistance | Drilling fluid resistant IEC 61892-4 | Drilling fluid resistant NEK TS 606 | Flexible at temperatures as low as -40 °C | Temperature-resistant to +90 °C | Halogen-free | Flame-retardant IEC 60332-1-2 | No flame propagation IEC 60332-3-22 | VDE certification | HAR certification | UL/CSA certification | Nominal voltage 300/500 V | Nominal voltage 450/750 V | Nominal voltage 600/1000 V | Nominal voltage 600 V according to UL | Nominal voltage 1000 V according to UL |
| Enhanced mechanical and chemical resistance | | | | | | | | | | | | | | | | | | | | |
| ÖLFLEX® PETRO C HFFR single core | • | | • | | • | • | • | • | • | • | • | • | | | • | | | • | | • |
| ÖLFLEX® PETRO C HFFR multi core | • | • | • | | • | • | • | • | • | • | • | • | | | • | • | | • | | • |
| ÖLFLEX® CLASSIC 400 P | • | | | | • | | | | | | | | | | | • | | | | |
| ÖLFLEX® CLASSIC 400 CP | • | | • | | • | | | | | | | | | | | • | | | | |
| ÖLFLEX® CLASSIC 415 CP | • | | • | | • | | | | | | | | | | | • | | | | |
| ÖLFLEX® 408 P (NEW, page 6) | • | | | • | • | | | | | | | | • | | | • | | | | |
| ÖLFLEX® 409 P (NEW, page 7) | • | | | • | • | | | | | | • | | | | • | • | | | | • |
| ÖLFLEX® 440 P | • | | | | • | • | | • | • | • | • | | • | | | • | | | | |
| ÖLFLEX® 440 CP | • | | • | | • | • | | • | • | • | • | | • | | | • | | | | |
| ÖLFLEX® 491 P | • | | | | • | | | | | | • | | | | • | • | | | • | |
| ÖLFLEX® 450 P | | • | | | • | | | | | | • | | | | | • | | | | |
| ÖLFLEX® 500 P | | • | | | • | • | | • | | • | • | | | | | • | | | | |
| ÖLFLEX® 540 P | • | • | | | • | • | | • | • | • | • | | • | | | • | • | | | |
| ÖLFLEX® 540 CP | • | • | • | | • | • | | • | • | • | • | | • | | | • | • | | | |
| ÖLFLEX® 550 P | | • | | | • | | | • | • | | | | • | | | • | • | | | |

ÖLFLEX® PETRO C HFFR



ÖLFLEX® 491 P



ÖLFLEX® 450 P



ÖLFLEX® CLASSIC 400 P / 400 CP / 415 CP



ÖLFLEX® 500 P



ÖLFLEX® 408 P / 409 P



ÖLFLEX® 540 P / 540 CP



ÖLFLEX® 440 P / 440 CP



ÖLFLEX® 550 P (H07BQ-F)



Versatile and tough

Mechanically robust

ÖLFLEX® PUR cables are used wherever harsh processing in the course of indoor and outdoor use demands a high level of resistance to notches, cuts and abrasion. It doesn't matter whether the cables are used on an abrasive surface, are sometimes driven over by vehicles or have to deal with sharp-edged machine parts or other shear forces – specially selected sheath compounds made of high-resistance polyurethane emphasise the characteristics of robustness and durability. Certain versions like the ÖLFLEX® 500 P and 540 P also feature outer sheaths in the signal colours of yellow and orange, making them easier to see in dark environments or in outdoor use and thereby ensuring enhanced safety.



Chemical resistance

When they come into contact with mineral oil-based lubricants and many other chemical media, all ÖLFLEX® PUR cables from the 400 and 500 product series can be awarded top marks for their chemical resistance. The entire ÖLFLEX® polyurethane range is therefore perfectly suited to applications in particularly oily areas of industrial machinery, machine tools, production lines and CNC processing centres. Even aggressive drilling fluids used in the offshore sector are no match for ÖLFLEX® PETRO C HFFR single cores or multi-core cables and other selected ÖLFLEX® PUR cables.

Wide temperature range

When used in cooling technology or in the case of outdoor use in particularly cold geographical climatic zones, control cables such as the ÖLFLEX® 440 P featuring special core insulation stand out thanks to their flexibility at temperatures as low as -40°C. This even extends as far as -50°C for fixed installation. If hotter conditions are expected, certain ÖLFLEX® PUR cables from Lapp can handle temperatures of up to +90°C depending on the core insulation material.

In addition to providing resistance to microbes and hydrolysis, the PUR sheath compounds feature UV and ozone resistance in line with international standards. This further increases the area of application and the durability of the cables in the context of outdoor use.





NEW



The new models are a hit with installers

New assembly products available

The addition of the new control cables ÖLFLEX® 408 P and ÖLFLEX® 409 P extends the cable range for applications with increased mechanical and chemical requirements in harsh conditions.

The polyurethane outer sheath material is abrasion-resistant and notch-resistant and provides both cables with an outstanding level of oil resistance.

Integrated functional layer

For more efficient stripping, both PUR cables are produced with an interstice filler functional layer on a special PVC base. This features optimised tear characteristics that make it simpler and safer to perform mechanical and manual cutting and removal of the sheath.

The special cable design can considerably reduce damage to the core insulation, subsequent processing of improperly stripped cable sections and material waste.

Tested and certified quality

The cable design and the assured properties of the ÖLFLEX® 408 P and ÖLFLEX® 409 P have been tested and certified by the VDE test institute and UL (Underwriters Laboratories).

To ensure the highest quality standards, the cables are also subject to regular factory surveillance.

Areas of application

- Device and apparatus construction
- Industrial machines and machine tools
- Assembly lines and production lines
- Measuring technology, control engineering and electrical engineering
- In dry, damp or wet interiors
- Outdoor use in accordance with the temperature range
- In the oily wet area of industrial machinery
- For fixed installation or applications with occasional flexing

ÖLFLEX® 408 P


The all-rounder in industrial machinery

- Abrasion-resistant and notch-resistant
- Enhanced oil resistance
- Hydrolysis-resistant and microbe-resistant
- Enhanced flexibility at temperatures as low as -15°C
- Outer sheath colour grey (RAL 7001)
- Nominal voltage U_0/U 300/500 V
- VDE-certified under reg. no. 8744


ÖLFLEX® 409 P

Tailored to North America

- Abrasion-resistant and notch-resistant
- Enhanced oil resistance
- Hydrolysis-resistant and microbe-resistant
- Flame-retardant according to IEC 60332-1-2 and UL VW-1, CSA FT1
- Outer sheath colour black
- Nominal voltage U_0/U 300/500 V (IEC) 1000 V (UL/CSA)
- UL and cUL tested and certified AWM Style 20234 (USA) AWM II A/B FT1 (Canada)

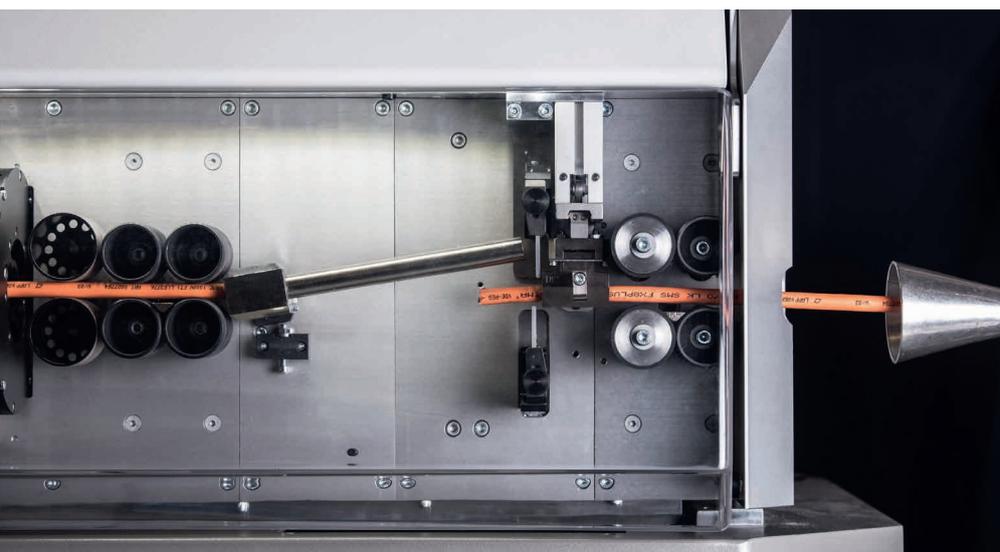

It's what's inside that counts

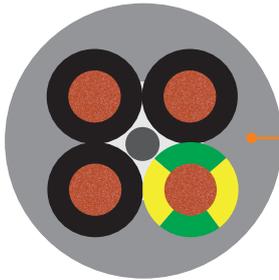


Press extruded with interstice filler

In order to produce a cable that is as round and as stable under pressure as possible, the sheath plastic in control cables is mostly 'press' extruded along the conductor bunch under high pressure. In the process, the gaps – known as the interstices – are filled with sheath material between the cores of the external stranding layer.

If the sheath material consists of highly robust, cut-resistant and notch-resistant polyurethane, the filled interstices can make it more difficult to remove the outer sheath. The tear-resistant interstice filler cannot be caught up when cutting the circular sheath. This means, for example, that the blade setting of the processing equipment must be aligned with even greater precision in order to cut as deep as possible and thereby prevent 'stringing' or excessive tensile forces acting on the remaining interstice material when tearing off the tough sheath.

It is not uncommon for the core insulation to be damaged by blades with a setting that is too deep. On the other hand, a reduced cutting depth presents the risk that the sheath can only be torn off under very high tensile forces and in an uncontrolled manner, or that the blades will slip off during the removal process and only scrape along the surface of the sheath.

The consequences of this often cost time and money, specifically in terms of machine downtime, subsequent manual processing and material waste.

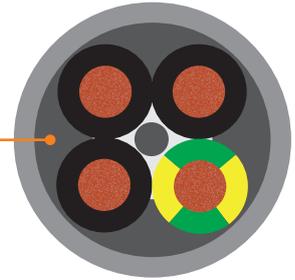

ÖLFLEX® 408 P / 409 P with functional layer

As is standard with higher-quality control cables, these versions also feature press extrusion with interstice filler for the purpose of optimum cable design.

However, the secret of the new ÖLFLEX® 408 P and 409 P control cables is the application of co-extrusion technology in sheath production. The abrasion-resistant and notch-resistant polyurethane outer sheath is inseparably connected to the interstice filler functional layer made of special PVC. The improved mechanical tear characteristics of the new interstice filler via the core stranding can counteract problems that typically occur during sheath processing. The cut depth can be reduced in order to protect the core insulation. The optimised tear characteristics of the functional layer prevent 'stringing', which often occurs with PUR interstices, as well as the occurrence of frayed cable sheaths in the event that the sheath casing is torn off in an uncontrolled manner.

The positive effect of the new functional inner layer is clear not only with regard to mechanical stripping, but also manual stripping. There are considerable improvements in separation and removal of the sheath in relative terms.

The processing benefits in detail

The innovative functional layer of the new ÖLFLEX® 408 P and ÖLFLEX® 409 P provides a range of benefits, particularly in the context of mechanical processing:

- Improved stripping characteristics
- Reduction of damage to core insulation
- Less subsequent manual processing
- Reduced material waste
- Saves time and costs



ÖLFLEX® 408 P

Abrasion- and oil-resistant control cable with PUR sheath for increased application requirements - VDE certified

Info

- High mechanical strength
- Good oil resistance
- Interstice-filling functional layer

Benefits

- Increased durability under harsh conditions thanks to robust PUR outer sheath
- Resistant to contact with many mineral oil-based lubricants, diluted acids, aqueous alkaline solutions and other chemical media
- Interstice-filling functional layer ensures more safety and efficiency during industrial jacket stripping
- VDE-tested characteristics

Application range

- Appliance and apparatus construction
- Industrial machinery and machine tools
- Measurement, control and electrical applications
- Outdoor use is possible within the indicated operating temperature range
- Very suitable for oily wet areas within machinery and production lines that are subject to normal mechanical stress

LAPP KABEL STUTTGART ÖLFLEX® 408 P VDE Reg.Nr. 8744 CE



Technical data



Classification
ETIM 5.0 Class-ID: EC000104
ETIM 5.0 Class-Description:
Control cable



Core identification code
Black with white numbers acc. to VDE 0293-1



Conductor stranding
Fine wire according to VDE 0295, class 5/IEC 60228 class 5



Minimum bending radius
Flexible use: 12.5 x outer diameter
Fixed installation: 4 x outer diameter



Nominal voltage
U₀/U: 300/500 V



Test voltage
4000 V



Protective conductor
G = with GN-YE protective conductor
X = without protective conductor



Temperature range
Occasional flexing: -15°C to +70°C
Fixed installation: -40°C to +80°C

Product features

- High oil-resistance
- Abrasion and notch-resistant
- Low-adhesive surface
- Resistant to hydrolysis and microbes

Norm references / Approvals

- VDE Reg.No. 8744

Product Make-up

- Fine-wire, bare copper conductor
- Core insulation: special PVC
- Cores twisted in layers
- Special outer sheath of polyurethane with interstice-filling functional layer
- Sheath colour: silver grey (RAL 7001)

| Article number | Number of cores and mm ² per conductor | Outer diameter (mm) | Copper index (kg/km) | Weight (kg/km) |
|----------------------|---|---------------------|----------------------|----------------|
| ÖLFLEX® 408 P | | | | |
| 1308802 | 2 X 0,5 | 4,8 | 9,6 | 32 |
| 1308003 | 3 G 0,5 | 5,1 | 14,4 | 39 |
| 1308803 | 3 X 0,5 | 5,1 | 14,4 | 39 |
| 1308004 | 4 G 0,5 | 5,7 | 19,2 | 49 |
| 1308804 | 4 X 0,5 | 5,7 | 19,2 | 49 |
| 1308005 | 5 G 0,5 | 6,2 | 24 | 59 |
| 1308805 | 5 X 0,5 | 6,2 | 24 | 59 |
| 1308007 | 7 G 0,5 | 6,7 | 33,6 | 73 |
| 1308807 | 7 X 0,5 | 6,7 | 33,6 | 73 |
| 1308010 | 10 G 0,5 | 8,6 | 48 | 116 |
| 1308012 | 12 G 0,5 | 8,9 | 57,6 | 129 |
| 1308018 | 18 G 0,5 | 10,5 | 86,4 | 184 |
| 1308025 | 25 G 0,5 | 12,4 | 120 | 256 |
| 1308852 | 2 X 0,75 | 5,4 | 14,4 | 42 |
| 1308103 | 3 G 0,75 | 5,7 | 21,6 | 51 |
| 1308853 | 3 X 0,75 | 5,7 | 21,6 | 51 |
| 1308104 | 4 G 0,75 | 6,2 | 28,8 | 62 |
| 1308854 | 4 X 0,75 | 6,2 | 28,8 | 62 |
| 1308105 | 5 G 0,75 | 6,7 | 36 | 75 |
| 1308855 | 5 X 0,75 | 6,7 | 36 | 75 |
| 1308107 | 7 G 0,75 | 7,3 | 50,4 | 95 |
| 1308857 | 7 X 0,75 | 7,3 | 50,4 | 95 |
| 1308110 | 10 G 0,75 | 9,6 | 72 | 153 |
| 1308112 | 12 G 0,75 | 9,9 | 86,4 | 170 |
| 1308118 | 18 G 0,75 | 11,7 | 129,6 | 245 |
| 1308125 | 25 G 0,75 | 13,8 | 180 | 340 |
| 1308902 | 2 X 1,0 | 5,7 | 19,2 | 49 |
| 1308203 | 3 G 1,0 | 6,0 | 28,8 | 60 |
| 1308903 | 3 X 1,0 | 6,0 | 28,8 | 60 |
| 1308204 | 4 G 1,0 | 6,5 | 38,4 | 74 |
| 1308904 | 4 X 1,0 | 6,5 | 38,4 | 74 |
| 1308205 | 5 G 1,0 | 7,1 | 48 | 90 |
| 1308905 | 5 X 1,0 | 7,1 | 48 | 90 |

| Article number | Number of cores and mm ² per conductor | Outer diameter (mm) | Copper index (kg/km) | Weight (kg/km) |
|----------------|---|---------------------|----------------------|----------------|
| 1308207 | 7 G 1,0 | 8,0 | 67,2 | 118 |
| 1308907 | 7 X 1,0 | 8,0 | 67,2 | 118 |
| 1308210 | 10 G 1,0 | 10,2 | 86 | 184 |
| 1308212 | 12 G 1,0 | 10,5 | 115,2 | 204 |
| 1308218 | 18 G 1,0 | 12,7 | 172,8 | 303 |
| 1308225 | 25 G 1,0 | 14,7 | 240 | 412 |
| 1308952 | 2 X 1,5 | 6,3 | 28,8 | 64 |
| 1308303 | 3 G 1,5 | 6,7 | 43,2 | 81 |
| 1308953 | 3 X 1,5 | 6,7 | 43,2 | 81 |
| 1308304 | 4 G 1,5 | 7,2 | 57,6 | 99 |
| 1308954 | 4 X 1,5 | 7,2 | 57,6 | 99 |
| 1308305 | 5 G 1,5 | 8,1 | 72 | 125 |
| 1308955 | 5 X 1,5 | 8,1 | 72 | 125 |
| 1308307 | 7 G 1,5 | 8,9 | 100,8 | 161 |
| 1308957 | 7 X 1,5 | 8,9 | 100,8 | 161 |
| 1308312 | 12 G 1,5 | 12,0 | 172,8 | 286 |
| 1308318 | 18 G 1,5 | 14,4 | 259,2 | 419 |
| 1308325 | 25 G 1,5 | 16,9 | 360 | 580 |
| 1308403 | 3 G 2,5 | 8,1 | 72 | 125 |
| 1308404 | 4 G 2,5 | 8,9 | 96 | 158 |
| 1308405 | 5 G 2,5 | 10,0 | 120 | 198 |
| 1308407 | 7 G 2,5 | 11,1 | 168 | 259 |
| 1308412 | 12 G 2,5 | 14,8 | 288 | 454 |
| 1308504 | 4 G 4 | 10,8 | 153,6 | 241 |
| 1308505 | 5 G 4 | 12,1 | 192 | 302 |
| 1308507 | 7 G 4 | 13,4 | 268,8 | 394 |
| 1308604 | 4 G 6 | 13,0 | 230,4 | 356 |
| 1308605 | 5 G 6 | 14,5 | 288 | 443 |
| 1308607 | 7 G 6 | 16,0 | 403,2 | 579 |
| 1308514 | 4 G 10 | 16,2 | 384 | 571 |
| 1308615 | 5 G 10 | 18,1 | 480 | 714 |
| 1308617 | 7 G 10 | 20,0 | 672 | 935 |
| 1308624 | 4 G 16 | 18,8 | 614,4 | 843 |

Unless specified otherwise, the shown product values are nominal values. Detailed values (e.g. tolerances) are available upon request.
Copper price basis: EUR 150 / 100 kg. Refer to catalogue appendix T17 for the definition and calculation of copper-related surcharges.

Please find our standard lengths at: www.lappkabel.de/en/cable-standardlengths

Packaging size: coil ≤ 30 kg or ≤ 250 m, otherwise drum

Please specify the preferred type of packaging (e.g. 1 x 500 m drum or 5 x 100 m coils).

Photographs are not to scale and do not represent detailed images of the respective products.



ÖLFLEX® 409 P

Abrasion- and oil-resistant PUR control cable for increased application requirements - certified for North America

Info

- Substitutes previous ÖLFLEX® 491 P
- UL/cUL certified for North America
- Interstice-filling functional layer



Benefits

- Increased durability under harsh conditions thanks to robust PUR outer sheath
- Resistant to contact with many mineral oil-based lubricants, diluted acids, aqueous alkaline solutions and other chemical media
- Interstice-filling functional layer ensures more safety and efficiency during industrial jacket stripping
- Certified for the USA and Canada for export-oriented appliance and apparatus manufacturers

Application range

- Appliance and apparatus construction
- Industrial machinery and machine tools
- Measurement, control and electrical applications
- Under consideration of the temperature range also suitable for outdoor use
- Very suitable for oily wet areas within machinery and production lines that are subject to normal mechanical stress

Product features

- High oil-resistance
- Flammability:
UL/CSA: VW-1, FT1
IEC/EN: 60332-1-2
- Abrasion and notch-resistant
- Low-adhesive surface
- Resistant to hydrolysis and microbes

Norm references / Approvals

- UL AWM Style 20234
- CUL AWM II A/B FT1

Product Make-up

- Fine-wire, bare copper conductor
- Core insulation: special PVC
- Cores twisted in layers
- Special outer sheath of polyurethane with interstice-filling functional layer
- Sheath colour: black (RAL 9005)

Technical data

Classification
ETIM 5.0 Class-ID: EC000104
ETIM 5.0 Class-Description: Control cable

Core identification code
Black with white numbers acc. to VDE 0293-1

Conductor stranding
Fine wire according to VDE 0295, class 5/IEC 60228 class 5

Minimum bending radius
Flexible use: 12.5 x outer diameter
Fixed installation: 4 x outer diameter

Nominal voltage
U₀/U: 300/500 V
UL/CSA: 1000 V

Test voltage
4000 V

Protective conductor
G = with GN-YE protective conductor
X = without protective conductor

Temperature range
Occasional flexing: -5°C to +70°C (UL: +80°C)
Fixed installation: -40°C to +80°C

| Article number | Number of cores and mm ² per conductor | Outer diameter (mm) | Copper index (kg/km) | Weight (kg/km) |
|----------------------|---|---------------------|----------------------|----------------|
| ÖLFLEX® 409 P | | | | |
| 1311852 | 2 X 0,75 | 6,9 | 14.4 | 61 |
| 1311103 | 3 G 0,75 | 7,2 | 21.6 | 71 |
| 1311104 | 4 G 0,75 | 7,7 | 28.8 | 84 |
| 1311105 | 5 G 0,75 | 8,3 | 36 | 100 |
| 1311107 | 7 G 0,75 | 8,9 | 50.4 | 122 |
| 1311110 | 10 G 0,75 | 10,8 | 72 | 180 |
| 1311112 | 12 G 0,75 | 11,1 | 86.4 | 198 |
| 1311118 | 18 G 0,75 | 12,8 | 129.6 | 275 |
| 1311125 | 25 G 0,75 | 14,5 | 180 | 364 |
| 1311902 | 2 X 1.0 | 7,2 | 19.2 | 69 |
| 1311203 | 3 G 1.0 | 7,5 | 28.8 | 81 |
| 1311204 | 4 G 1.0 | 8.0 | 38.4 | 97 |
| 1311205 | 5 G 1.0 | 8,7 | 48 | 117 |
| 1311207 | 7 G 1.0 | 9,3 | 67.2 | 142 |
| 1311210 | 10 G 1.0 | 11,4 | 96 | 212 |
| 1311212 | 12 G 1.0 | 11,7 | 115.2 | 234 |
| 1311218 | 18 G 1.0 | 13,5 | 172.8 | 327 |
| 1311225 | 25 G 1.0 | 15,4 | 240 | 437 |
| 1311952 | 2 X 1,5 | 7,8 | 28.8 | 87 |

| Article number | Number of cores and mm ² per conductor | Outer diameter (mm) | Copper index (kg/km) | Weight (kg/km) |
|----------------|---|---------------------|----------------------|----------------|
| 1311303 | 3 G 1,5 | 8,2 | 43.2 | 104 |
| 1311304 | 4 G 1,5 | 8,8 | 57.6 | 126 |
| 1311305 | 5 G 1,5 | 9,5 | 72 | 151 |
| 1311307 | 7 G 1,5 | 10,2 | 100.8 | 188 |
| 1311312 | 12 G 1,5 | 13.0 | 172.8 | 314 |
| 1311318 | 18 G 1,5 | 15.0 | 259.2 | 441 |
| 1311325 | 25 G 1,5 | 17,2 | 360 | 596 |
| 1311403 | 3 G 2,5 | 9,5 | 72 | 151 |
| 1311404 | 4 G 2,5 | 10,2 | 96 | 184 |
| 1311405 | 5 G 2,5 | 11,1 | 120 | 224 |
| 1311407 | 7 G 2,5 | 12.0 | 168 | 282 |
| 1311412 | 12 G 2,5 | 15,5 | 288 | 480 |
| 1311504 | 4 G 4 | 11,8 | 153.6 | 266 |
| 1311505 | 5 G 4 | 12,9 | 192 | 325 |
| 1311604 | 4 G 6 | 13,1 | 230.4 | 359 |
| 1311605 | 5 G 6 | 14,3 | 288 | 438 |
| 1311704 | 4 G 10 | 16,5 | 384 | 585 |
| 1311705 | 5 G 10 | 18,2 | 480 | 722 |
| 1311804 | 4 G 16 | 19,1 | 614.4 | 861 |
| 1311805 | 5 G 16 | 22,1 | 768 | 1107 |

Unless specified otherwise, the shown product values are nominal values. Detailed values (e.g. tolerances) are available upon request.
Copper price basis: EUR 150 / 100 kg. Refer to catalogue appendix T17 for the definition and calculation of copper-related surcharges.
Please find our standard lengths at: www.lappkabel.de/en/cable-standardlengths
Packaging size: coil ≤ 30 kg or ≤ 250 m, otherwise drum
Please specify the preferred type of packaging (e.g. 1 x 500 m drum or 5 x 100 m coils).
Photographs are not to scale and do not represent detailed images of the respective products.



ÖLFLEX®
Power and control cables



UNITRONIC®
Data communication systems



ETHERLINE®
Data communication systems
for ETHERNET technology



HITRONIC®
Optical transmission systems



EPIC®
Industrial connectors



SKINTOP®
Cable glands



SILVYN®
Protective cable conduit systems
and cable carrier systems



FLEXIMARK®
Marking systems

Follow the Lapp Group on



Terms of Trade:

Our general conditions of sale
can be downloaded from our website
www.lappgroup.com/terms



www.lappgroup.com

To contact your local Lapp Group representative,
please visit www.lappgroup.com/worldwide