

RJ45 X-Over patch cable Cat.5e F/UTP H


X-Over

Cat.5e

halogen-free

Made in Europe

100% testing

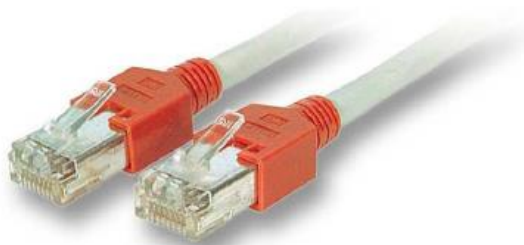

Patch cable

Type:	Cat.5e X-Over patch cable, halogen-free, shielded
Data transmission rate:	2,5 Gbit/s
Frequency range:	100 MHz
Field of application:	X-Over wiring of terminals (PCs, Switches, ...) in home und office area
Quality control:	Each assembly tested individually
EG directives:	2011/65/EU (RoHS, Restriction of Hazardous Substances)

Conductor

Cable:	Cat.5e patch cable Draka UC300
Conductor:	4 x 2 x AWG 26/7
Screen:	F/UTP - overall shield of plastic laminated aluminum foil
Outer sheath:	LSZH Compound, colour grey
Flame retardant:	According to IEC 60332-1
Halogen-free:	According to IEC 60754-2
Temperature range:	-20°C to +60°C for permanent installation 0°C to +50°C for moving application
Outer diameter:	Ø 5,4 mm
Min. bending radius:	27 mm / 5 x cable diameter (min.)

Originator:	Approval:	Revised
Date: 08.04.2016	Date: 08.04.2016	Date: 23.01.2020
Name: PM - J. Burgholzer	Name: PM - H. Frühwirt	Name: PM - J. Burgholzer
		Revision: 1
Technical changes and misprints reserve.		LAPP Austria GmbH, Bremenstraße 8, 4030 Linz
QM-Form. Nr. 88 - Rev. Nr. 0		www.lappaustria.at

RJ45 X-Over patch cable Cat.5e F/UTP H

Connector

Connector:	RJ45 Hirose TM11 shielded, gold-plated contacts
Bend relief:	Bend relief red
Pin assignment:	1 - 3 white/orange 2 - 6 orange 3 - 1 white/green 4 - 7 blue 5 - 8 white/blue 6 - 2 green 7 - 4 white/brown 8 - 5 brown

Available versions

Length	PU	Part No.
0,5m	5	2710330603
1m	5	2710330605
2m	5	2710330607
3m	5	2710330609
5m	5	2710330610
7,5m	5	2710330611
10m	5	2710330612
15m	1	2710330614
20m	1	2710330615
25m	1	2710330616
30m	1	2710330617
35m	1	2710330618

Originator:	Approval:	Revised
Date: 08.04.2016	Date: 08.04.2016	Date: 23.01.2020
Name: PM - J. Burgholzer	Name: PM - H. Frühwirt	Name: PM - J. Burgholzer
Technical changes and misprints reserve.		Revision: 1
QM-Form. Nr. 88 - Rev. Nr. 0		LAPP Austria GmbH, Bremenstraße 8, 4030 Linz
Page 2 of 2		www.lappaustria.at