
# **CHARGING SOLUTIONS**

for e-mobility





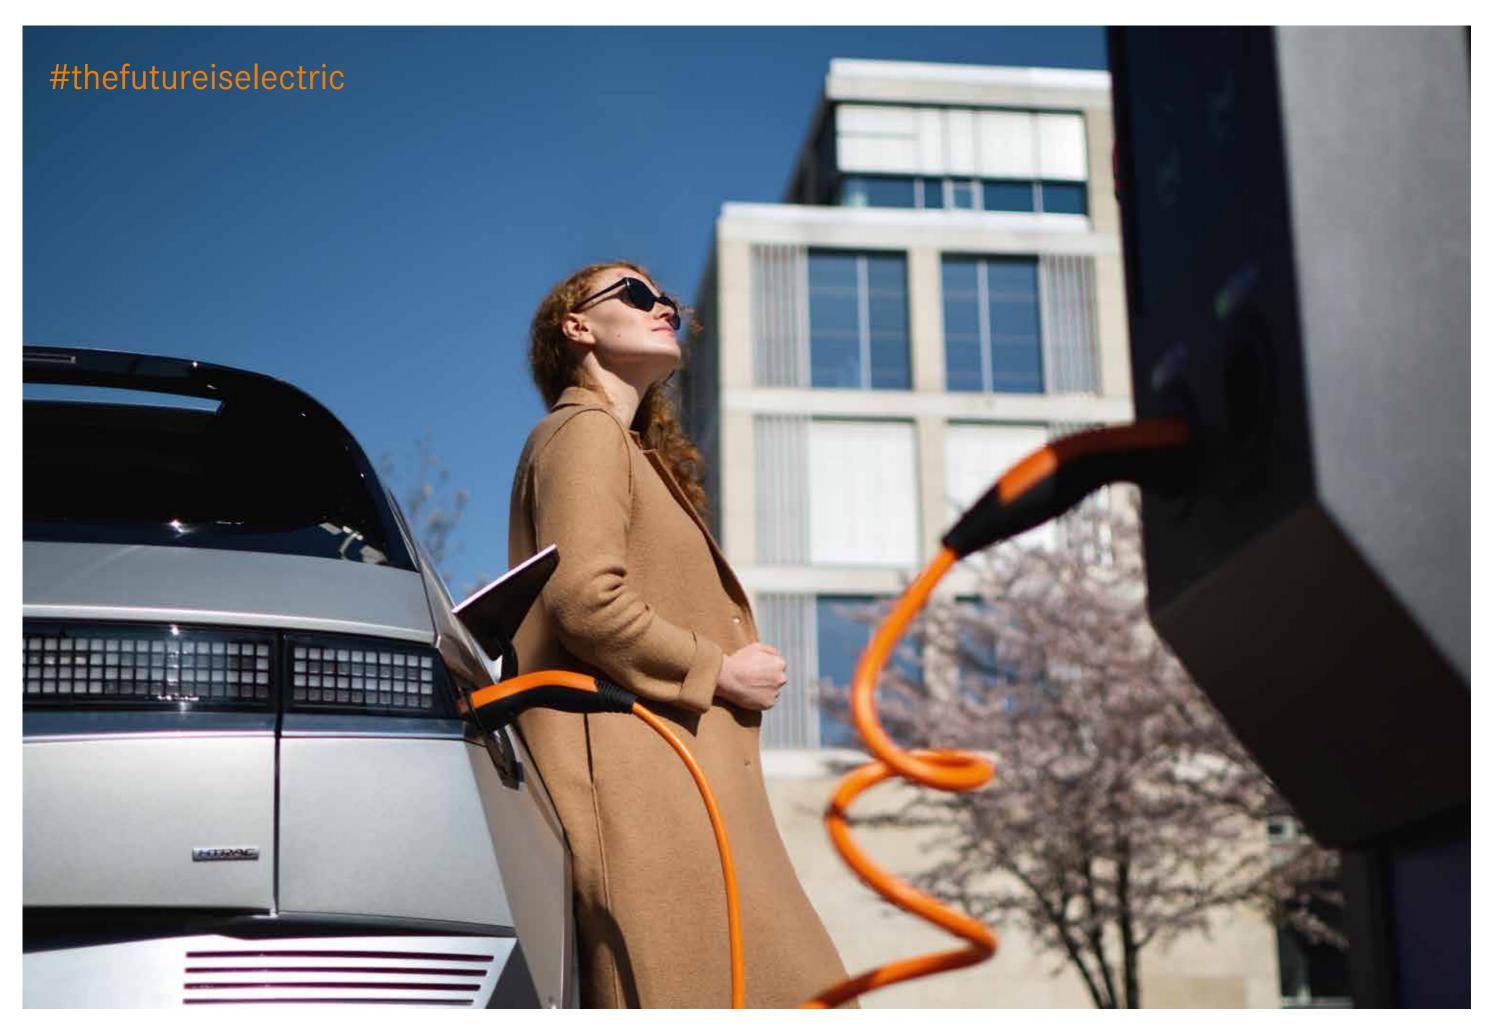

# E-MOBILITY WITHOUT LIMITS

LAPP HELPS YOU REACH YOUR DESTINATION WITH CERTIFIED PRODUCTS FOR CHARGING AT CHARGING STATIONS AND WALL BOXES, ALONG WITH SOCKETS FOR HOUSEHOLDS AND INDUSTRY.

# TABLE OF CONTENTS

MODE 3 CHARGING CABLES	4	BASIC MOBILE CHARGING STATION	10
Cable versions	6	UNIVERSAL MOBILE CHARGING STATION	10
Connector design	7	WALL MOUNT	12
MODE 2 CHARGING CABLES	8	MOBILITY DOCK	13
Properties	9		



# MODE 3 CHARGING CABLES

CHARGING CABLE FOR USE ON PUBLIC CHARGING STATIONS AND WALL BOXES





p.

### **CABLE VERSIONS**

### SMOOTH

THE CLASSIC TYPE OF CHARGING CABLE



#### HELIX

#### FOR SIMPLE HANDLING

The patented LAPP HELIX is a quick-charge cable that rolls back up to automatically take its original shape after charging is complete. This means that users don't have to spend time rolling it up by hand – the HELIX is quick and safe to store away.



SPIRAL
THE COMPACT OPTION

## **CONNECTOR DESIGN**

#### THE CONNECTOR HOUSING

is composed of two shells, which means that individual colour variations are possible.

The lightweight material and slim shape of the LAPP connector make it ideal for everyday use.

Power classes:

20 A, 1-phase/3-phase;

32 A, 1-phase/3-phase

Charging power up to 22 kW depending on version,

IEC certified

Standard colours: Black/orange

Optional: Customer-specific logo





### MODE 2 CHARGING CABLES

MOBILE CHARGING STATION FOR CHARGING FROM HOUSEHOLD OR INDUSTRIAL SOCKETS



### **PROPERTIES**

#### VERSATILE

- For charging from household or industrial sockets (countryspecific versions available)
- Control box fitted with a type 2 coupling on the vehicle side
- Unique design:
   Variable cable and coupling
   colour

#### SAFE

- IEC certified
- Meets IEC 62752 standard
- Integrated differential current sensor for excellent safety
- Temperature sensors in power connector and control box: Detection of excessive heat build-up, reduction of charging current and interruption of the charging process if the permissible temperature is exceeded
- Protection rating IP67 (control box)
- Control box protected against being



- Simply plug-in and charge
- Automatically detects the maximum charging current thanks to coding in the power cable
- The charging process is fully automatic and ends as soon as the battery is charged.

#### **POWERFUL**


 Power up to 22 kW possible (with CEE connector and 32 A power cable)

### **BASIC MOBILE CHARGING STATION**



### UNIVERSAL MOBILE CHARGING STATION



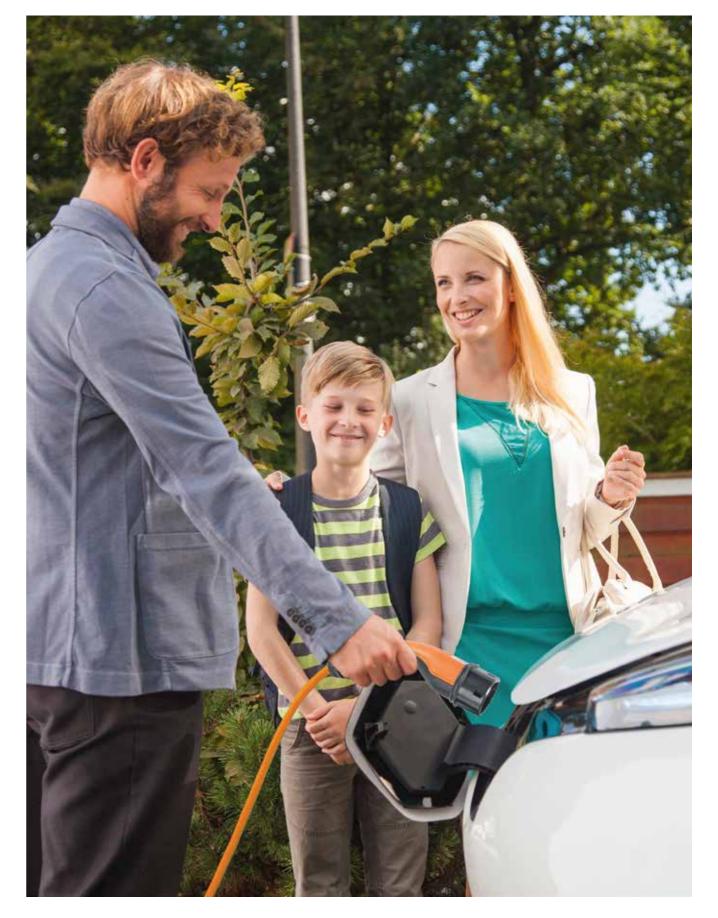

### WALL MOUNT

#### FOR THE MOBILE CHARGING STATION

#### THE WALL MOUNT FOR THE MOBILE CHARGING STATION

enables the Mode 2 charging cable to be easily mounted on the wall in a garage, car port, underground car park or outdoor parking space. The optional lockable wall mount means that the charging station is always safely stowed away and conveniently attached to the wall, where it can be removed very easily when required. The Mode 2 charging cable with control box (IC-CPD) is connected directly to the mains power and the integrated control and protection unit controls the charging process via the cable to the vehicle.

The wall mount and mobile charging station combination gives you a simple wall box: the WALL BOX LIGHT. On the road, the mobile charging station gives you the reassurance that you can always charge from a standard household socket.

# ADVANTAGES AT A GLANCE

- · User-friendly thanks to intuitive insertion of the
- Secure attachment of the Mode 2 charging cable
- The Mode 2 charging cable means the charging process is automatic and ends as soon as the

# **MOBILITY DOCK**

#### RETHINKING CHARGERS

#### THE MOBILITY DOCK

is specially designed for use on the road. Connected to a standard household socket, your electric or plug-in hybrid car can be charged easily and safely anywhere.

The existing mode 3 charging cable is connected between the car and the charger, which is then connected to the mains power.





13

- Mobile charger for use with a standard domestic power socket
- 100% user friendly and intuitive
- Compact design and ergonomic, easy handling
- Space saving storage in boot
- · Charging process starts automatically when requested by the car
- · Meets all relevant requirements of the IEC62752 product standard
- Use with the mode 3 charging cable already available in the car
- Gyro sensor in housing for position monitoring



 Quick and easy installation Mode 2 charging cable into the wall mount battery is fully charged. · Lockable option - protects against theft · Easy to remove

