

EPIC® Pin & Sleeve Connectors

North American 30A & International 32A Dimensional Data

Male Plugs

TECHNICAL DATA:

Impact Resistance: 8J

Ambient Temperature: -25°C to +70°C

Flame Resistance:


Glow Wire Test: Enclosure: 850°C

Glow Wire Test: Contact Carrier: 850°C


Self-Extinguishing: Enclosure: UL 94-V2

Self-Extinguishing: Contact Carrier: UL 94-V2


CEE Series Straight with Cable Gland (IP 67)

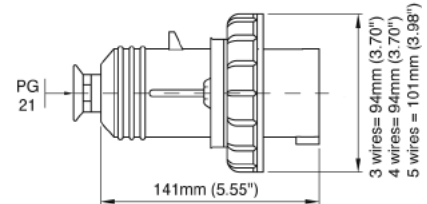

MULTIMAX with cable sleeve (IP 44)




CEE Series Straight with cable gland (IP 44)




Female Connectors

CEE Series Straight with Cable Gland (IP 67)

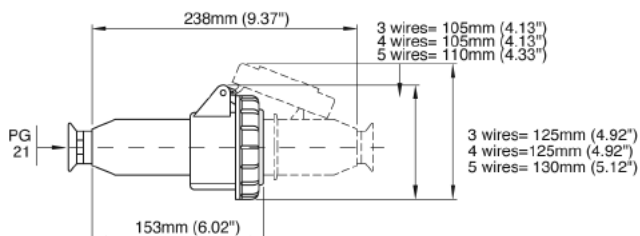


MULTIMAX with cable sleeve (IP 44)






North American 30A & International 32A Dimensional Data


CEE Series Angled Panel Mount (IP 67)

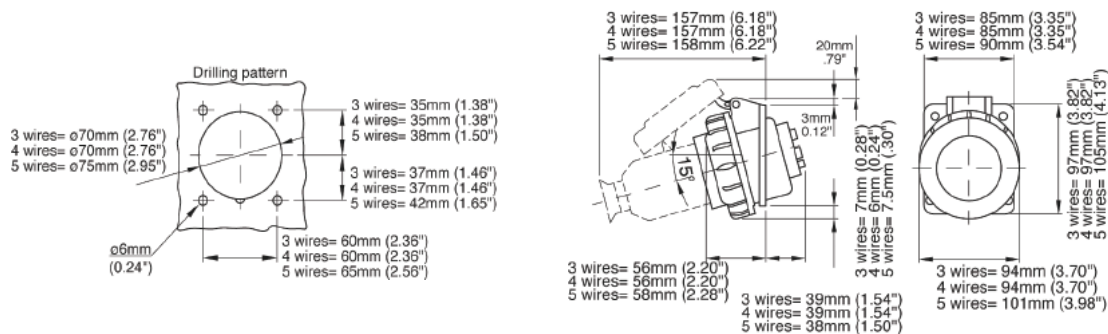

CEE Series Straight Panel Mount (IP 44)

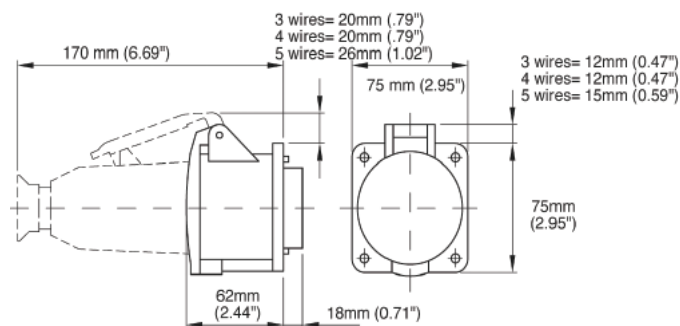

CEE Series 75° Internal Surface Mount (IP 44)


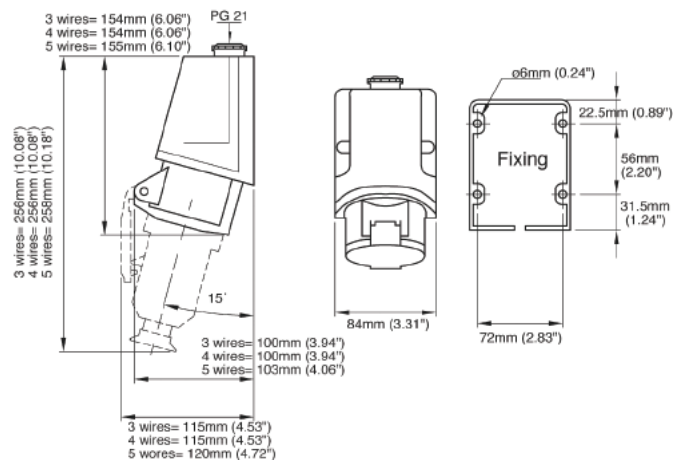


EPIC® Pin & Sleeve Connectors



North American 30A & International 32A Dimensional Data

Male Plug Inlets

CEE Series Angled 82° Inlet (IP 67)

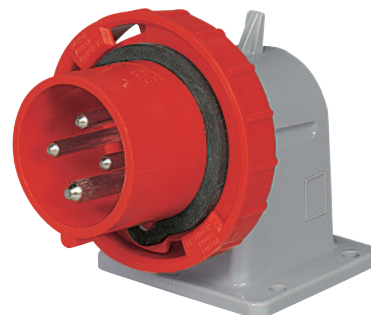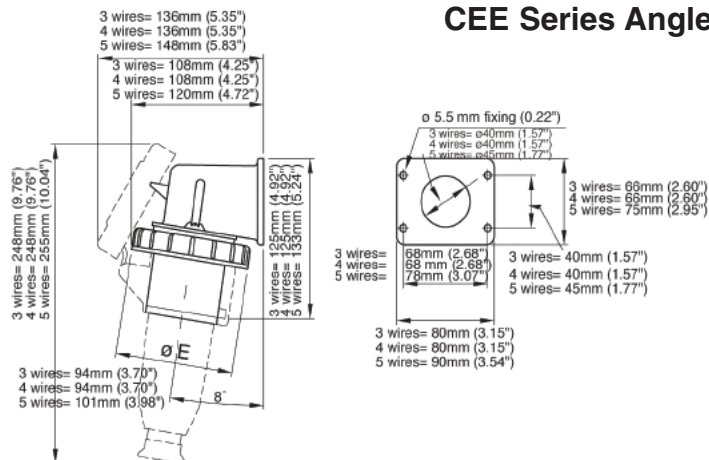


CEE Series Angled 82° Inlet (IP 44)

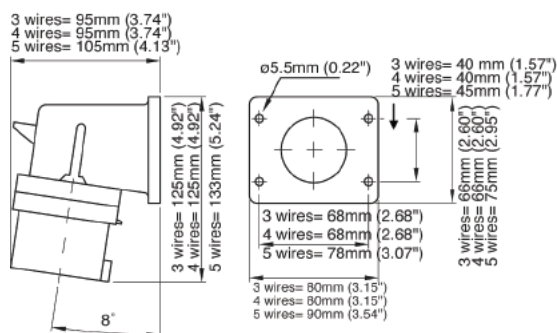

Switched Socket Outlet with Mechanical Interlock

ULYSSE Series: Thermoset Plastic Enclosures with Fuse Holder (IP66 & IP 67)

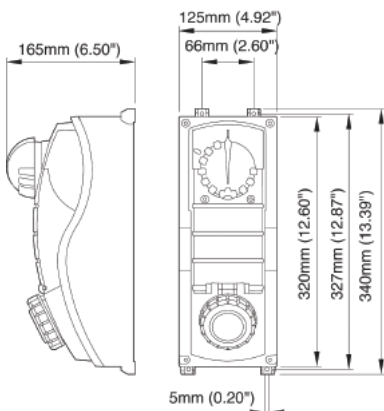

ALUPRES Series: Aluminum Enclosures Direct Connect (IP 65)

