

Amphenol

62IN Series Miniature
Circular Bayonet-Coupled
Connectors



Amphenol

Introduction

Amphenol 62IN series connectors are general purpose, environment resistant, miniature circular connectors with three-point bayonet-coupling and five-key polarisation. Designed to meet the requirements of **MIL-C-26482, Series I solder type**, these connectors are widely used in applications calling for quick disconnect connectors.

62IN connectors are intermateable and interchangeable with all MIL-C-26482 connectors, whether solder or crimp type. These connectors are used worldwide in military and industrial applications and are available in a variety of sizes, styles and configurations.

Amphenol 62IN series connectors are also approved to Indian Defence Standard Joint Services Specification **JSS50813**, certified by the Electronic Components Standardisation Organisation (LCSO), Bangalore, India.

Page Contents

| | |
|---------------------------------|-------|
| Introduction | 1 |
| General description | 2 |
| Insert orientations | 3 |
| Key / Keyway orientations | 4 |
| Insert arrangements | 5 |
| Connector styles | 6-11 |
| Dust covers | 12 |
| Accessories | 13-15 |
| Back-Shell | 16-18 |
| Specials and deviations | 19 |
| Ordering 62IN series connectors | 20 |

General description

Amphenol 62IN series miniature circular bayonet-coupled solder connectors meet the most critical application needs. Design versatility and high reliability performance make this series ideal for environmental sealing.

Shell

Shell hardware is manufactured from aluminium alloy and cadmium plated with an olive drab chromate finish. This finish has excellent conductivity; it is non-reflecting and corrosion resistant. Black anodised finish and cadmium-free zinc-cobalt plating are also available. For details, contact factory.

Shell styles consist of wall and box mounting receptacles, jam nut receptacles, cable mounting receptacles and straight plugs. Connectors are available in 9 shell sizes: 8, 10, 12, 14, 16, 18, 20, 22 and 24.

Positive shell-to-shell keying is provided with keys and keyways in a choice of either normal (N) or any of the preferred alternate positions: W, X, Y and Z. This prevents mismatching between shells of different orientations and overcomes the difficulties associated with rotated inserts and standard key / keyway orientation. In the latter system, damage to inserts or contacts can result if excessive force is used to engage non-mating pairs.

Spring tension provided by a wave washer in the coupling ring ensures maintenance of inter facial seal between mating halves.

Insert and grommet

The insert and grommet are moulded from resilient neoprene, offering high dielectric strength and resistance to oils, gasoline and low temperature. This provides electrical isolation of the contacts in the insert and excellent moisture sealing.


Contacts

Gold over nickel plated pin and socket contacts are machined from brass and designed for solder connections. Industrial version crimp contacts are also available on request.


Specifications

| | | | |
|--|-----------------------------|--------------|----------------|
| Number of contacts | 2 thru 61 in discrete steps | | |
| Operating temperature | -55° C to +125° C | | |
| Current rating | | | |
| Contact size | Rated current | Test current | Potential drop |
| 20 | 7.5A | 7.5A | ≤ 55mV |
| 16 | 13A | 13A | ≤ 50mV |
| Voltage rating (max. operating voltage at sea level) | | | |
| Service rating | AC (rms) | | |
| I | 600V | | |
| II | 1000V | | |
| Insulation resistance | ≥ 5000 Mohm | | |
| Voltage proof | | | |
| Service rating | Test voltage (rms) | | |
| I | 1500V | | |
| II | 2300V | | |
| Wire range accommodations | | | |
| Contact size | AWG wire size | | |
| 20 | 24, 22 and 20 | | |
| 16 | 20, 18 and 16 | | |


Insert orientations



Normal position of insert with pin contacts



Alternate position of insert with socket contacts
(θ counterclockwise)




Alternate position of insert with pin contacts
(θ clockwise)

Each diagram shows mating face of insert

| Insert arrangement | Orientation | | | |
|--------------------|-------------|-----|-----|-----|
| | W | X | Y | Z |
| 8-2 | 58 | 122 | - | - |
| 8-3 | 60 | 210 | - | - |
| 8-4 | 45 | - | - | - |
| 8-33 | 90 | - | - | - |
| 8-98 | - | - | - | - |
| 10-2 | - | - | - | - |
| * 10-5 | 90 | - | - | - |
| 10-6 | 90 | - | - | - |
| 10-7 | - | - | - | - |
| 10-8 | - | - | - | - |
| 12-3 | - | - | 180 | - |
| 12-4 | 38 | - | - | - |
| 12-8 | 90 | 112 | 203 | 292 |
| 12-10 | 60 | 155 | 270 | 295 |
| 12-12 | - | - | - | - |
| 12-14 | - | - | - | - |
| *14-02 | - | - | - | - |
| *14-04 | 40 | 92 | 184 | 273 |
| 14-05 | 40 | 92 | 184 | 273 |
| *14-08 | 43 | 90 | - | - |
| 14-12 | 43 | 90 | - | - |
| *14-14 | 17 | 110 | 155 | 234 |
| 14-15 | 17 | 110 | 155 | 234 |
| 14-18 | 15 | 90 | 180 | 270 |
| 14-19 | 30 | 165 | 315 | - |
| 16-8 | 54 | 152 | 180 | 331 |
| 16-23 | 158 | 270 | - | - |
| 16-26 | 60 | - | 275 | 338 |
| *18-02 | 62 | 119 | 241 | 340 |
| 18-11 | 62 | 119 | 241 | 340 |
| 18-32 | 85 | 138 | 222 | 265 |
| 20-16 | 238 | 318 | 333 | 347 |
| 20-27 | 72 | 144 | 216 | 288 |
| 20-29 | 63 | 144 | 252 | 333 |
| 20-39 | 45 | 126 | 225 | - |
| 20-41 | 45 | 126 | 225 | - |
| 22-21 | 16 | 135 | 175 | 349 |
| *22-36 | 16 | 135 | 175 | 349 |
| 22-41 | 39 | 135 | 264 | - |
| *22-44 | 30 | 142 | 226 | 314 |
| 22-55 | 30 | 142 | 226 | 314 |
| 24-31 | 90 | 225 | 225 | - |
| 24-61 | 90 | 180 | 270 | 324 |

* Special insert arrangements consult factory

Key / Keyway orientations

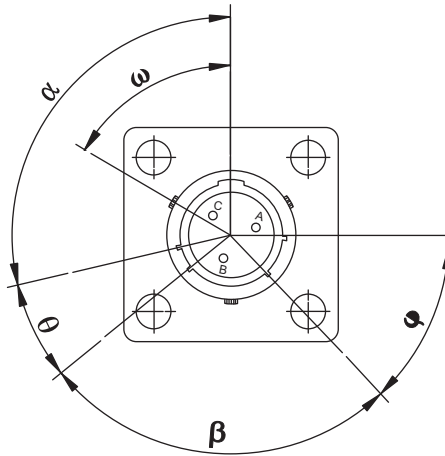

| Shell size | Angles in degrees | | | | | | | | | | | | | | | | | | | |
|------------|-------------------|----|-----|-----|-----|----------|----|----|----|----|---------|----|----|-----|----|--------|----|----|----|----|
| | α | | | | | θ | | | | | β | | | | | ϕ | | | | |
| | N | B | C | E | F | N | B | C | E | F | N | B | C | E | F | N | B | C | E | F |
| 8 | 105 | - | - | 118 | 82 | 35 | - | - | 30 | 50 | 75 | - | - | 100 | 75 | 50 | - | - | 30 | 45 |
| 10 | 105 | 85 | 125 | 115 | 85 | 35 | 35 | 35 | 30 | 50 | 75 | 75 | 75 | 100 | 75 | 50 | 50 | 50 | 30 | 45 |
| 12 | 105 | 89 | 121 | 115 | 85 | 35 | 35 | 35 | 30 | 50 | 75 | 75 | 75 | 100 | 75 | 50 | 50 | 50 | 30 | 45 |
| 14 | 105 | 91 | 119 | 75 | 120 | 35 | 35 | 35 | 30 | 50 | 75 | 75 | 75 | 100 | 75 | 50 | 50 | 50 | 30 | 35 |
| 16 | 105 | 93 | 117 | 75 | 120 | 35 | 35 | 35 | 30 | 50 | 75 | 75 | 75 | 100 | 75 | 50 | 50 | 50 | 30 | 35 |
| 18 | 105 | 95 | 115 | 75 | 120 | 35 | 35 | 35 | 30 | 50 | 75 | 75 | 75 | 100 | 75 | 50 | 50 | 50 | 30 | 35 |
| 20 | 105 | 95 | 115 | 75 | 120 | 35 | 35 | 35 | 30 | 50 | 75 | 75 | 75 | 100 | 75 | 50 | 50 | 50 | 30 | 35 |
| 22 | 105 | 97 | 113 | 75 | 120 | 35 | 35 | 35 | 30 | 50 | 75 | 75 | 75 | 75 | 75 | 50 | 50 | 50 | 30 | 35 |
| 24 | 105 | 97 | 113 | 75 | 120 | 35 | 35 | 35 | 30 | 50 | 75 | 75 | 75 | 100 | 75 | 50 | 50 | 50 | 30 | 35 |


| Shell size | Angle in degrees ω | | | | |
|------------|---------------------------|----|----|----|----|
| | N | B | C | E | F |
| 8 | 60 | - | - | 73 | 47 |
| 10 | 60 | 40 | 80 | 70 | 50 |
| 12 | 60 | 44 | 76 | 70 | 50 |
| 14 | 60 | 46 | 74 | 30 | 75 |
| 16 | 60 | 48 | 72 | 30 | 75 |
| 18 | 60 | 50 | 70 | 30 | 75 |
| 20 | 60 | 50 | 70 | 30 | 75 |
| 22 | 60 | 52 | 68 | 30 | 75 |
| 24 | 60 | 54 | 68 | 30 | 75 |

Angles shown are with reference to the major key or keyway. In receptacles, the major keyway always remains fixed in relation to the mounting flange. For B, C, E and F orientations, the three bayonet locations and associated minor keyways are rotated completely as shown in the tables. The accompanying diagram shows a receptacle shell with keyways. Corresponding key orientations for a mating plug shell are therefore always clockwise.


Insert arrangements

Front face of pin insert or rear of socket insert illustrated


| Contact Legend | | |
|----------------|----|----|
| Symbol | ● | ○ |
| Contact size | 16 | 20 |




| | | | | | | | | | | | |
|--------------------|-----|-----|-----|------|------|------|------|------|------|------|------|
| Insert arrangement | 8-2 | 8-3 | 8-4 | 8-33 | 8-98 | 10-2 | 10-6 | 10-7 | 10-8 | 12-3 | 12-4 |
| Service rating | I | I | I | I | I | II | I | I | I | II | II |
| Number of contacts | 2 | 3 | 4 | 3 | 3 | 2 | 6 | 7 | 8 | 3 | 4 |
| Contact size | 20 | 20 | 20 | 20 | 20 | 16 | 20 | 20 | 20 | 16 | 16 |



| | | | | | | | | | |
|--------------------|------|-------|-------|-------|------|-------|-------|-------|-------|
| Insert arrangement | 12-8 | 12-10 | 12-12 | 12-14 | 14-5 | 14-12 | 14-14 | 14-15 | 14-18 |
| Service rating | I | I | I | I | II | I | I | I | I |
| Number of contacts | 8 | 10 | 12 | 14 | 5 | 4 8 | 14 | 1 14 | 18 |
| Contact size | 20 | 20 | 20 | 20 | 16 | 16 20 | 20 | 16 20 | 20 |

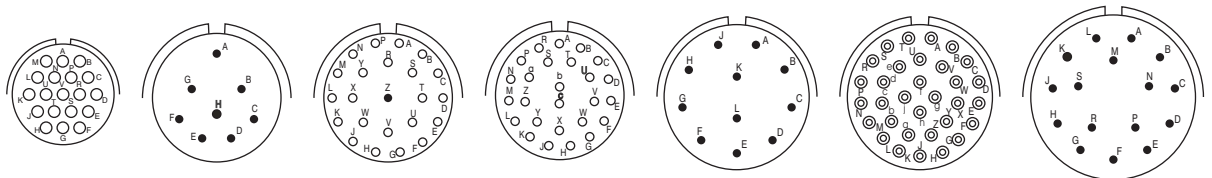



| | | | | | | | |
|--------------------|-------|------|-------|-------|-------|-------|-------|
| Insert arrangement | 14-19 | 16-8 | 16-23 | 16-26 | 18-11 | 18-32 | 20-16 |
| Service rating | I | II | I | I | II | I | II |
| Number of contacts | 19 | 8 | 1 22 | 26 | 11 | 32 | 16 |
| Contact size | 20 | 16 | 16 20 | 20 | 16 | 20 | 16 |

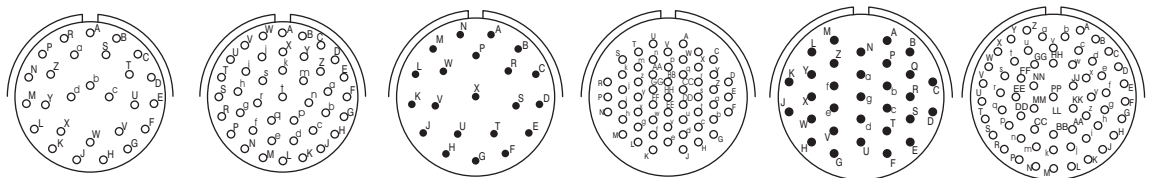

| | | | | | | |
|--------------------|-------|-------|-------|-------|-------|-------|
| Insert arrangement | 20-27 | 20-41 | 22-21 | 22-55 | 24-31 | 24-61 |
| Service rating | I | I | II | I | I | I |
| Number of contacts | 27 | 41 | 21 | 55 | 31 | 61 |
| Contact size | 20 | 20 | 16 | 20 | 16 | 20 |

Connector styles

Wall mounting receptacles

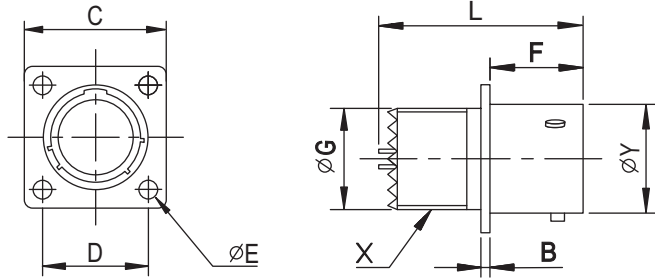


Without termination assemblies

All dimensions in mm

| Shell size | B | C | D | E Dia | F | G Dia | L | Y Dia | X threads in inches |
|------------|------|-------|-------|-------|-------|-------|-------|-------|---------------------|
| 8 | 1.58 | 20.75 | 15.09 | 3.05 | 11.30 | 11.02 | 24.84 | 12.02 | 7/16-28 UNEF |
| 10 | 1.58 | 23.93 | 18.26 | 3.05 | 11.30 | 14.17 | 24.84 | 14.99 | 9/16-24 NEF |
| 12 | 1.58 | 26.32 | 20.63 | 3.05 | 11.30 | 17.35 | 24.84 | 19.05 | 11/16-24 NEF |
| 14 | 1.58 | 28.70 | 23.10 | 3.05 | 11.30 | 20.52 | 24.84 | 22.23 | 13/16-20 UNEF |
| 16 | 1.58 | 31.07 | 24.61 | 3.05 | 11.30 | 23.70 | 24.84 | 25.40 | 15/16-20 UNEF |
| 18 | 1.58 | 33.45 | 26.58 | 3.05 | 11.30 | 26.85 | 24.84 | 28.58 | 1 1/16-18 NEF |
| 20 | 2.03 | 36.63 | 29.36 | 3.05 | 14.10 | 30.02 | 26.62 | 31.75 | 1 3/16-18 NEF |
| 22 | 2.03 | 39.80 | 31.75 | 3.05 | 14.10 | 30.02 | 26.62 | 34.93 | 1 5/16-18 NEF |
| 24 | 2.03 | 42.98 | 34.93 | 3.74 | 14.99 | 36.37 | 26.62 | 38.10 | 1 7/16-18 NEF |

Note: Serrations / antirotation feature is not provided on shells for 10A, 10E and 10F styles.

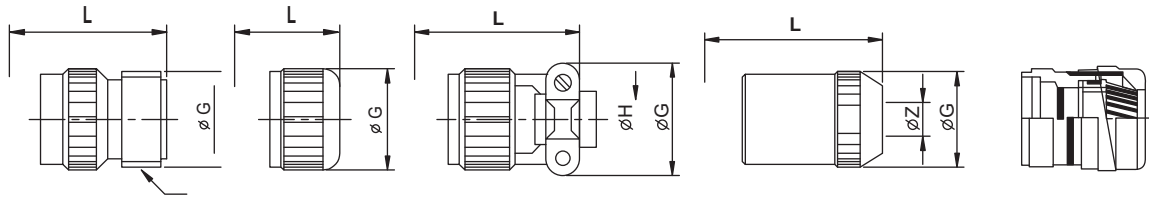

Style 10A

Style 10E

Style 10F

Style 10J

10PHM/EGM



With termination assemblies

All dimensions in mm

| Shell size | Style 10A | | | Style 10E | | Style 10F | | | Style 10J | | | |
|------------|-----------|-------|--------------------|-----------|-------|-----------|-------|-------|-----------|-------|----------------------|-------|
| | G Dia | L | M thread in inches | G Dia | L | G Dia | H Dia | L | G Dia | L | For cable size Z Dia | |
| | | | | | | | | | | | min | max |
| 8 | 14.25 | 41.25 | 1/2-28 UNEF | 14.25 | 32.54 | 21.03 | 3.96 | 44.76 | 14.25 | 46.89 | 4.28 | 5.84 |
| 10 | 17.43 | 41.25 | 5/8-24 NEF | 17.43 | 32.54 | 22.63 | 4.78 | 44.76 | 17.43 | 46.89 | 5.21 | 7.93 |
| 12 | 20.60 | 41.25 | 3/4-20 UNEF | 20.60 | 32.54 | 25.81 | 7.93 | 44.76 | 20.80 | 49.45 | 8.59 | 11.23 |
| 14 | 23.78 | 41.25 | 7/8-20 UNEF | 23.78 | 32.54 | 28.98 | 9.58 | 44.10 | 23.78 | 54.54 | 10.57 | 13.69 |
| 16 | 26.98 | 41.25 | 1-20 UNEF | 26.98 | 32.54 | 30.56 | 12.70 | 47.65 | 26.98 | 59.61 | 13.97 | 15.65 |
| 18 | 30.12 | 41.25 | 1 3/16-18 NEF | 30.12 | 32.54 | 36.22 | 15.87 | 47.65 | 30.12 | 64.70 | 15.24 | 17.07 |
| 20 | 33.30 | 42.85 | 1 3/16-18 NEF | 33.30 | 35.13 | 36.22 | 15.87 | 53.80 | 33.30 | 71.91 | 16.13 | 18.98 |
| 22 | 36.47 | 42.85 | 1 7/16-18 NEF | 36.47 | 35.13 | 39.80 | 19.05 | 53.80 | 36.47 | 76.99 | 17.02 | 21.49 |
| 24 | 39.65 | 43.94 | 1 7/16-18 NEF | 39.65 | 35.13 | 44.07 | 30.32 | 57.15 | 39.65 | 78.08 | 18.80 | 22.71 |

Connector styles

Box mounting receptacles

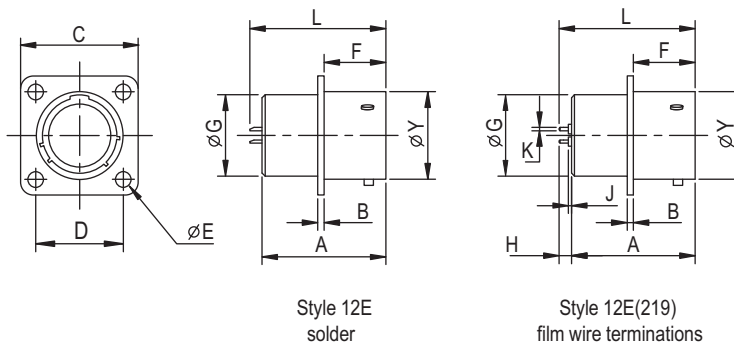

Style 12E
solder

Style 12E(219)
film wire terminations


All dimensions in mm

| Shell size | B | C | D | E Dia | F | G Dia | Y Dia | Style 12E | | Style 12E(219) | | | | | | |
|------------|------|-------|-------|----------|-------|----------|----------|-----------|-------|----------------|------|------|------|------|------|-------|
| | | | | | | | | A | L | A | H | | J | K | | L |
| | | | | | | | | | | | min | max | | min | max | |
| 8 | 1.58 | 20.75 | 15.09 | 3.05 | 11.30 | 11.02 | 12.02 | 20.32 | 24.84 | 20.32 | 4.22 | 5.03 | 2.26 | 0.70 | 0.76 | 24.95 |
| 10 | 1.58 | 23.93 | 18.26 | 3.05 | 11.30 | 14.17 | 14.99 | 20.32 | 24.84 | 20.32 | 4.22 | 5.03 | 2.26 | 0.70 | 0.76 | 24.95 |
| 12 | 1.58 | 26.32 | 20.63 | 3.05 | 11.30 | 17.35 | 19.05 | 20.32 | 24.84 | 20.32 | 4.22 | 5.03 | 2.26 | 0.70 | 0.76 | 24.95 |
| 14 | 1.58 | 28.70 | 23.10 | 3.05 | 11.30 | 20.52 | 22.23 | 20.32 | 24.84 | 20.32 | 4.22 | 5.03 | 2.26 | 0.70 | 0.76 | 24.95 |
| 16 | 1.58 | 31.07 | 24.61 | 3.05 | 11.30 | 23.70 | 25.40 | 20.32 | 24.84 | 20.32 | 4.22 | 5.03 | 2.26 | 0.70 | 0.76 | 24.95 |
| 18 | 1.58 | 33.45 | 26.58 | 3.05 | 11.30 | 26.85 | 28.58 | 20.32 | 24.84 | 20.32 | 4.22 | 5.03 | 2.26 | 0.70 | 0.76 | 24.95 |
| 20 | 2.03 | 36.63 | 29.36 | 3.05 | 14.10 | 30.02 | 31.75 | 22.23 | 26.62 | 22.23 | 3.89 | 4.70 | 1.93 | 0.70 | 0.76 | 26.85 |
| 22 | 2.03 | 39.80 | 31.75 | 3.05 | 14.10 | 30.02 | 34.93 | 22.23 | 26.62 | 22.23 | 3.89 | 4.70 | 1.93 | 0.70 | 0.76 | 26.85 |
| 24 | 2.03 | 42.98 | 34.93 | 3.74 | 14.99 | 36.37 | 38.10 | 22.23 | 26.62 | 22.23 | 3.89 | 4.70 | 1.93 | 0.70 | 0.76 | 26.85 |


Mounting data

Panel cutouts

Wall mounting receptacles

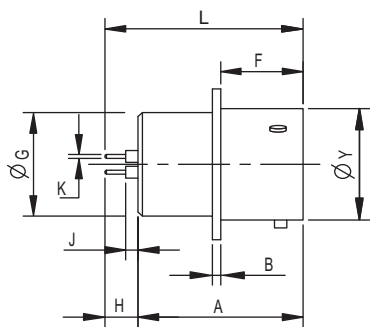

Style 12E(220)
film wire terminations

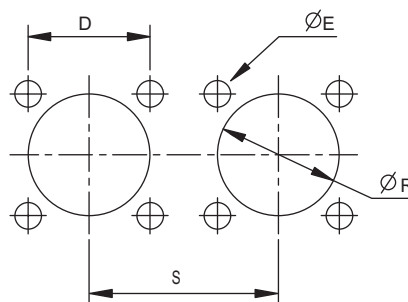

All dimensions in mm

All dimensions in mm




| Shell size | A | H | | J | K | | L |
|------------|-------|------|------|------|------|------|-------|
| | | min | max | | min | max | |
| 8 | 20.32 | 7.95 | 8.00 | 4.60 | 0.70 | 0.76 | 28.32 |
| 10 | 20.32 | 7.95 | 8.00 | 4.60 | 0.70 | 0.76 | 28.32 |
| 12 | 20.32 | 7.95 | 8.00 | 4.60 | 0.70 | 0.76 | 28.32 |
| 14 | 20.32 | 7.95 | 8.00 | 4.60 | 0.70 | 0.76 | 28.32 |
| 16 | 20.32 | 7.95 | 8.00 | 4.60 | 0.70 | 0.76 | 28.32 |
| 18 | 20.32 | 7.95 | 8.00 | 4.60 | 0.70 | 0.76 | 28.32 |
| 20 | 22.23 | 7.95 | 8.00 | 4.60 | 0.70 | 0.76 | 30.23 |
| 22 | 22.23 | 7.95 | 8.00 | 4.60 | 0.70 | 0.76 | 30.23 |
| 24 | 22.23 | 7.95 | 8.00 | 4.60 | 0.70 | 0.76 | 30.23 |

| Shell size | D | E Dia | R Dia | S |
|------------|-------|----------|----------|-------|
| 8 | 15.09 | 3.05 | 14.42 | 31.73 |
| 10 | 18.29 | 3.05 | 17.53 | 34.52 |
| 12 | 20.75 | 3.05 | 21.84 | 38.89 |
| 14 | 23.11 | 3.05 | 25.15 | 42.06 |
| 16 | 24.64 | 3.05 | 28.19 | 45.24 |
| 18 | 26.92 | 3.05 | 31.49 | 48.03 |
| 20 | 29.46 | 3.05 | 35.54 | 51.59 |
| 22 | 31.75 | 3.05 | 37.85 | 52.76 |
| 24 | 35.05 | 3.05 | 41.15 | 57.84 |


Note: Style 220 is also available for 57A type receptacles with similar termination dimensions as 12E(220) style shown above.

Connector styles

Jam nut receptacles



Style 57A
solder




Style 57A(219)
film wire terminators

Without termination assemblies


All dimensions in mm

| Shell size | B | C | D | | F | H | | J | K Panel Thickness | | Style 57A L | Style 57A (219) L | M Dia. | Y Dia. | X Thread in inches |
|------------|------|-------|------|------|--------|-------|------|-------|----------------------|-------|----------------|----------------------|-----------|-----------|-----------------------|
| | | | Min. | Max. | | Min. | Max. | | Min. | Max. | | | | | |
| | | | 8 | 2.97 | | 23.93 | 0.70 | | 0.76 | 17.93 | | | | | |
| 10 | 2.97 | 27.10 | 0.70 | 0.76 | 17.93 | 3.38 | 4.40 | 22.23 | 1.58 | 3.18 | 24.84 | 24.84 | 16.56 | 14.99 | 1/16-24 NEF |
| 12 | 2.97 | 31.88 | 0.70 | 0.76 | 17.93 | 3.38 | 4.40 | 26.98 | 1.58 | 3.18 | 24.84 | 24.84 | 20.70 | 19.05 | 7/8-20 UNEF |
| 14 | 2.97 | 35.05 | 0.70 | 0.76 | 17.93 | 3.38 | 4.40 | 30.15 | 1.58 | 3.18 | 24.84 | 24.84 | 23.85 | 22.23 | 1-20 UNEF |
| 16 | 2.97 | 38.23 | 0.70 | 0.76 | 17.93 | 3.38 | 4.40 | 33.32 | 1.58 | 3.18 | 24.84 | 24.84 | 27.00 | 25.40 | 1 1/8-18 NEF |
| 18 | 2.97 | 41.40 | 0.70 | 0.76 | 17.932 | 3.38 | 4.40 | 36.50 | 1.58 | 3.18 | 24.84 | 24.84 | 30.18 | 28.58 | 1 1/4-18 NEF |
| 20 | 3.76 | 46.15 | 0.70 | 0.76 | 22.71 | 3.38 | 4.40 | 38.68 | 1.58 | 6.35 | 26.62 | 30.35 | 33.35 | 31.75 | 1 3/8-18 NEF |
| 22 | 3.76 | 49.33 | 0.70 | 0.76 | 22.71 | 3.38 | 4.40 | 42.85 | 1.58 | 6.35 | 26.62 | 30.35 | 36.53 | 34.93 | 1 1/2-18 NEF |
| 24 | 3.76 | 52.50 | 0.70 | 0.76 | 23.55 | 3.38 | 4.40 | 46.05 | 1.58 | 6.35 | 26.62 | 30.35 | 39.70 | 38.10 | 1 5/8-18 NEF |



Style 14E

Mounting data Panel cutouts



With termination assemblies

All dimensions in mm


| Shell size | G Dia. | L |
|------------|-----------|-------|
| 8 | 18.11 | 34.14 |
| 10 | 21.29 | 34.14 |
| 12 | 24.46 | 34.14 |
| 14 | 27.63 | 34.14 |
| 16 | 30.81 | 34.14 |
| 18 | 33.98 | 34.14 |
| 20 | 37.16 | 40.03 |
| 22 | 40.33 | 40.03 |
| 24 | 43.51 | 40.87 |

| Shell size | N | R Dia. | S |
|------------|-------|-----------|-------|
| 8 | 13.72 | 14.53 | 31.75 |
| 10 | 16.89 | 17.70 | 34.52 |
| 12 | 21.03 | 22.48 | 38.89 |
| 14 | 24.18 | 25.65 | 42.06 |
| 16 | 27.33 | 28.83 | 45.24 |
| 18 | 30.50 | 32.00 | 48.03 |
| 20 | 33.68 | 35.18 | 51.59 |
| 22 | 36.86 | 38.35 | 54.76 |
| 24 | 40.03 | 41.45 | 57.84 |

Jam nut receptacles



62 IN - 57T
Single hole mounting with threaded shell to accept accessories

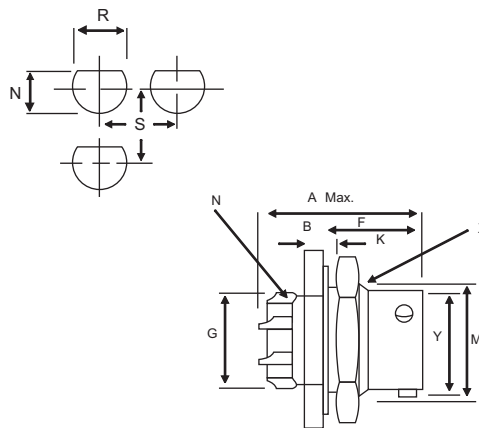


All dimensions in mm

| Shell Size | A max | B ±0.05 (±0.13) | C max sq. | F ±0.005 (±0.13) | G Dia. Max. | K | | L | M -0.005 (-0.13) | N | Y | X Thread |
|------------|----------------|-----------------|----------------|------------------|----------------|---------------|---------------|----------------|------------------|---------------|----------------|---------------|
| | | | | | | min | Max | | | | | |
| 08 | 0.978 24.84 | 0.117 2.97 | 0.942 23.93 | 0.595 15.12 | 0.426 10.82 | 0.062 1.58 | 0.125 3.58 | 0.750 19.05 | 0.527 13.3 | 7/16 - UNEF | 0.473 12.03 | 9/16-24 NEF |
| 10 | 0.978 24.84 | 0.117 2.97 | 1.067 27.10 | 0.595 15.12 | 0.552 14.02 | 0.062 1.58 | 0.125 3.18 | 0.875 22.23 | 0.652 16.56 | 9/16 - UNEF | 0.590 14.99 | 11/16-24 NEF |
| 12 | 0.978 24.84 | 0.117 2.97 | 1.255 31.88 | 0.595 15.12 | 0.677 17.20 | 0.062 1.58 | 0.125 3.18 | 1.062 26.98 | 0.825 20.70 | 11/16 - UNEF | 0.750 19.05 | 7/8-20 UNEF |
| 12 | 0.978 24.84 | 0.117 2.97 | 1.380 35.05 | 0.595 15.12 | 0.802 20.37 | 0.062 1.58 | 0.125 3.18 | 1.187 30.15 | 0.939 23.85 | 13/16 - UNEF | 0.875 22.23 | 1-20 UNEF |
| 16 | 0.978 24.84 | 0.117 2.97 | 1.505 38.23 | 0.595 15.12 | 0.927 23.55 | 0.062 1.58 | 0.125 3.18 | 1.312 33.32 | 1.063 27.00 | | 1.000 25.40 | 1.1/18-18 NEF |
| 18 | 0.978 24.84 | 0.117 2.97 | 1.630 41.40 | 1.595 15.12 | 1.052 26.72 | 0.062 1.58 | 0.125 3.18 | 1.437 36.50 | 1.188 30.18 | 15/16 - UNEF | 1.125 28.58 | 1.1/4-18 NEF |
| 20 | 1.048 26.62 | 0.148 3.76 | 1.817 46.15 | 0.720 18.29 | 1.167 29.65 | 0.062 1.58 | 0.250 6.35 | 1.562 39.68 | 1.313 33.35 | 1.3/16 - UNEF | 1.250 31.75 | 1.3/8-18 NEF |
| 22 | 1.048 26.62 | 0.148 3.76 | 1.942 49.33 | 0.720 18.29 | 1.292 32.82 | 0.062 1.58 | 0.250 6.35 | 1.687 42.85 | 1.438 36.53 | 1.5/16 - UNEF | 1.375 34.93 | 1.1/2-18 NEF |
| 24 | 1.048 26.62 | 0.148 3.76 | 2.067 52.50 | 0.753 19.13 | 1.416 35.97 | 0.062 1.58 | 0.250 6.35 | 1.812 46.05 | 1.563 39.70 | 1.7/16 - UNEF | 1.500 38.10 | 1.5/8-18 NEF |






62 IN - 14F
Single hole mounting with grommet and grommet nut fitted with integral strain relief clamp has panel 'O' ring seal

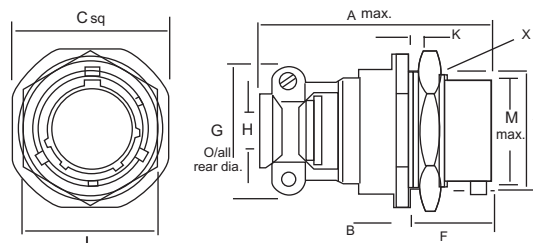

| Shell Size | A max | B +0.05 (+0.13) | C max sq. | F ±0.005 (±0.13) | G dia max | H ±0.005 (±0.13) | K | | L | M -0.005 (-0.13) | N ±0.005 (±0.13) | R ±0.005 (±0.13) | S | Y | X Thread |
|------------|----------------|-----------------|----------------|------------------|----------------|------------------|---------------|----------------|----------------|------------------|------------------|------------------|----------------|----------------|---------------|
| | | | | | | | min | max | | | | | | | |
| 08 | 1.762 44.75 | 0.117 2.97 | 0.942 23.93 | 0.706 17.93 | 0.828 21.03 | 0.156 3.96 | 0.062 1.58 | 0.750 19.50 | 0.125 3.175 | 0.527 13.3 | 0.540 13.72 | 0.572 14.53 | 1.250 31.75 | 0.473 12.03 | 9/16-24 NEF |
| 10 | 1.762 44.75 | 0.117 2.97 | 0.067 27.10 | 0.706 17.93 | 0.891 22.63 | 0.188 4.78 | 0.062 1.58 | 0.125 3.18 | 0.875 22.23 | 0.652 16.56 | 0.665 16.89 | 0.697 17.70 | 1.359 34.52 | 0.590 14.99 | 11/16-124 NEF |
| 12 | 1.762 44.75 | 0.117 2.97 | 1.255 31.88 | 0.706 17.93 | 1.016 25.81 | 0.312 7.93 | 0.062 1.58 | 0.125 3.18 | 1.062 26.98 | 0.815 20.70 | 0.828 21.03 | 0.885 22.48 | 1.531 38.89 | 0.750 19.05 | 7/8-20 UNEF |
| 14 | 1.876 47.65 | 0.117 2.97 | 1.380 35.05 | 0.706 17.93 | 1.141 28.97 | 0.375 9.35 | 0.062 1.58 | 0.125 3.18 | 1.187 30.15 | 0.939 23.85 | 0.952 24.18 | 1.010 25.65 | 1.656 42.06 | 0.875 22.23 | 1-20 UNEF |
| 16 | 1.876 47.65 | 0.117 2.97 | 1.505 38.23 | 0.706 17.93 | 1.203 30.56 | 0.500 12.7 | 0.062 1.58 | 0.125 3.18 | 1.312 33.32 | 1.063 27.00 | 1.076 27.33 | 1.135 28.83 | 1.781 45.24 | 1.000 25.40 | 1.1/8-18 NEF |
| 18 | 1.876 47.65 | 0.117 2.97 | 1.630 41.40 | 0.706 17.93 | 1.426 36.22 | 0.625 15.88 | 0.062 1.58 | 0.125 3.175 | 1.437 36.50 | 1.188 30.18 | 1.201 30.50 | 1.260 32.00 | 1.891 48.03 | 1.125 28.58 | 1.1/4-18 NEF |
| 20 | 2.118 53.8 | 0.148 3.76 | 1.817 46.15 | 0.894 22.71 | 1.426 36.22 | 0.625 15.88 | 0.062 1.58 | 0.250 6.35 | 1.562 39.68 | 1.313 33.35 | 1.326 33.68 | 1.385 35.18 | 2.031 51.59 | 1.250 31.75 | 1.3/8-18 NEF |
| 22 | 2.118 53.8 | 0.148 3.76 | 1.942 49.33 | 0.894 22.71 | 1.567 39.80 | 0.750 19.05 | 0.062 1.58 | 0.250 6.35 | 1.687 42.85 | 1.438 36.53 | 1.451 36.86 | 1.510 38.35 | 2.156 54.76 | 1.375 34.93 | 1.1/2-18 NEF |
| 24 | 2.250 57.15 | 0.148 3.76 | 2.067 52.50 | 0.927 23.55 | 1.735 44.07 | 0.800 20.32 | 0.062 1.58 | 0.250 6.35 | 1.812 46.05 | 1.563 39.70 | 1.576 40.03 | 1.635 41.45 | 2.277 57.84 | 1.500 38.10 | 1.5/8-18 NEF |

Connector styles


Cable mounting receptacles



Without termination assemblies

All dimensions in mm

| Shell size | B | C | F | L | Y Dia | X thread in inches |
|------------|------|-------|-------|-------|-------|--------------------|
| 8 | 2.39 | 20.75 | 10.54 | 24.84 | 12.03 | 7/16-28 UNEF |
| 10 | 2.39 | 23.93 | 10.54 | 24.84 | 14.99 | 9/16-24 NEF |
| 12 | 2.39 | 26.32 | 10.54 | 24.84 | 19.05 | 11/16-24 NEF |
| 14 | 2.39 | 28.70 | 10.54 | 24.84 | 22.23 | 13/16-20 UNEF |
| 16 | 2.39 | 31.07 | 10.54 | 24.84 | 25.40 | 15/16-20 UNEF |
| 18 | 2.39 | 33.45 | 10.54 | 24.84 | 28.58 | 1 1/16-18 NEF |
| 20 | 2.59 | 36.63 | 13.59 | 26.62 | 31.75 | 1 3/16-18 NEF |
| 22 | 2.59 | 39.80 | 13.59 | 26.62 | 34.93 | 1 5/16-18 NEF |
| 24 | 2.59 | 42.98 | 14.53 | 26.62 | 38.10 | 1 7/16-18 NEF |

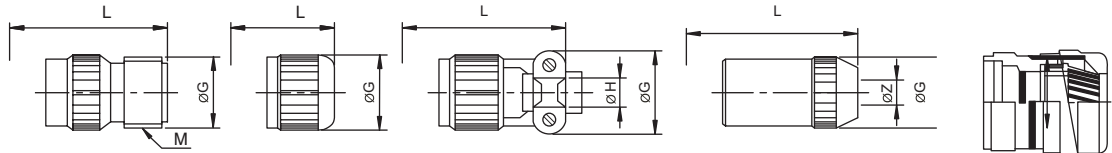

Style 11A

Style 11E

Style 11F

Style 11J

11PHM/EGM




With termination assemblies

All dimensions in mm

| Shell size | Style 11A | | | Style 11E | | Style 11F | | | Style 11J | | | |
|------------|-----------|-------|--------------------|-----------|-------|-----------|-------|-------|-----------|-------|----------------------|-------|
| | G Dia | L | M thread in inches | G Dia | L | G Dia | H Dia | L | G Dia | L | For cable size Z Dia | |
| 8 | 14.25 | 41.25 | 1/2-28 UNEF | 14.25 | 32.54 | 21.03 | 3.96 | 44.76 | 14.25 | 46.89 | 4.28 | 5.84 |
| 10 | 17.43 | 41.25 | 5/8-24 NEF | 17.43 | 32.54 | 22.63 | 4.78 | 44.76 | 17.43 | 46.89 | 5.21 | 7.93 |
| 12 | 20.60 | 41.25 | 3/4-20 UNEF | 20.60 | 32.54 | 25.81 | 7.93 | 44.76 | 20.60 | 49.45 | 8.59 | 11.23 |
| 14 | 23.78 | 41.25 | 7/8-20 UNEF | 23.78 | 32.54 | 28.97 | 9.53 | 44.10 | 23.78 | 54.54 | 10.57 | 13.69 |
| 16 | 26.95 | 41.25 | 1-20 UNEF | 26.95 | 32.54 | 30.56 | 12.70 | 47.65 | 26.95 | 59.61 | 13.97 | 15.65 |
| 18 | 30.13 | 41.25 | 1 3/16-18 NEF | 30.13 | 32.54 | 36.22 | 15.88 | 47.65 | 30.13 | 64.70 | 15.24 | 17.07 |
| 20 | 33.30 | 42.85 | 1 3/16-18 NEF | 33.30 | 35.13 | 36.22 | 15.88 | 53.80 | 33.30 | 71.91 | 16.13 | 18.98 |
| 22 | 36.75 | 42.85 | 1 7/16-18 NEF | 36.75 | 35.13 | 39.80 | 19.05 | 53.80 | 36.75 | 76.99 | 17.02 | 21.49 |
| 24 | 39.65 | 43.95 | 1 7/16-18 NEF | 39.65 | 35.13 | 44.07 | 20.32 | 57.15 | 39.65 | 78.03 | 18.80 | 22.71 |

Connector styles


16




Without termination assemblies

All dimensions in mm


| Shell size | C Dia | L | X in inches |
|------------|-------|-------|---------------|
| 8 | 19.05 | 24.79 | 7/16-28 UNEF |
| 10 | 21.82 | 24.79 | 9/16-24NEF |
| 12 | 26.19 | 24.79 | 11/16-24 NEF |
| 14 | 29.36 | 24.79 | 13/16-20 UNEF |
| 16 | 32.54 | 24.79 | 15/16-20 UNEF |
| 18 | 35.33 | 24.79 | 11/16-18 NEF |
| 20 | 38.89 | 26.79 | 1 3/16-18 NEF |
| 22 | 42.06 | 26.79 | 1 5/16-18 NEF |
| 24 | 45.14 | 26.79 | 1 7/16-18 NEF |




Style 16A



Style 16E



Style 16F



Style 16J



16PHM/EGM

With termination assemblies

| Shell size | Style 16 A | | | Style 16 E | | Style 16 F | | | Style 16 J | | | |
|------------|------------|-------|--------------------|------------|-------|------------|-------|-------|------------|-------|----------------------|-------|
| | G Dia | L | M Thread In Inches | G Dia | L | G Dia | H Dia | L | G Dia | L | For cable size Z Dia | |
| | | | | | | | | | | | min | max |
| 8 | 14.25 | 41.00 | 1/2-28 UNEF | 14.25 | 32.54 | 21.03 | 3.96 | 44.50 | 14.25 | 46.64 | 4.28 | 5.84 |
| 10 | 17.43 | 41.00 | 5/8-24 NEF | 17.43 | 32.54 | 22.63 | 4.78 | 44.50 | 17.43 | 46.64 | 5.21 | 7.93 |
| 12 | 20.60 | 41.00 | 3/4-20 UNEF | 20.60 | 32.54 | 25.81 | 7.93 | 44.50 | 20.60 | 49.20 | 8.59 | 11.23 |
| 14 | 23.78 | 41.00 | 7/8-20 UNEF | 23.78 | 32.54 | 28.97 | 9.53 | 43.84 | 23.78 | 54.28 | 10.57 | 13.69 |
| 16 | 26.95 | 41.00 | 1-20 UNEF | 26.95 | 32.54 | 30.56 | 12.70 | 47.40 | 26.95 | 59.36 | 13.97 | 15.65 |
| 18 | 30.13 | 41.00 | 1 3/16-18 NEF | 30.13 | 32.54 | 36.22 | 15.88 | 47.40 | 30.13 | 64.45 | 15.24 | 17.07 |
| 20 | 33.30 | 41.00 | 1 3/16-18 NEF | 33.30 | 32.54 | 36.22 | 15.88 | 51.81 | 33.30 | 70.05 | 16.13 | 18.98 |
| 22 | 36.75 | 41.00 | 1 7/16-18 NEF | 36.75 | 32.54 | 39.80 | 19.05 | 51.81 | 36.75 | 75.13 | 17.02 | 21.49 |
| 24 | 39.61 | 42.11 | 1 7/16-18 NEF | 39.61 | 32.54 | 44.07 | 20.32 | 55.32 | 39.61 | 76.25 | 18.80 | 22.71 |



Notes: 1. Plugs are also available with heavy duty ribbed coupling ring, to order, add deviation (044) at the end of plug part number.

Metallic dust covers

Standard is olive drab chromate finish over cadmium plating with straight knurling. To order add suffix **-XX** to required style, where XX specifies shell size. It is strongly recommended that these are fitted to provide protection when connectors are not in use. For alternate finishes or dust covers with heavy duty ribs, contact factory for further details and part number. Dust cap with Nylon cord is also available. Contact factory for further details.


For receptacles

| Dust cover style | | To fit receptacle style |
|------------------|-----------------|-------------------------|
| with chain | with nylon cord | |
| 62IN-736 | 62IN-813 | Jam nut |
| 62IN-737 | 62IN-814 | Cable mounting |
| 62IN-738 | 62IN-812 | Wall and box mounting |

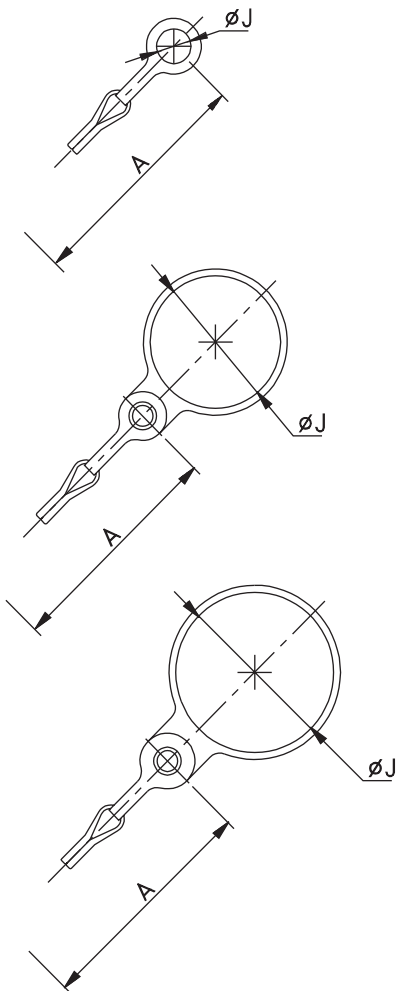

For plugs

| Dust cover style | |
|------------------|-----------------|
| with chain | with nylon cord |
| 62IN-742 | 62IN-810 |



All dimensions in mm



| Shell size | A chain / cord length | B | | C Dia | J Dia | | |
|------------|-----------------------------|--------------------|--------------|----------|------------|------------|--------------------------|
| | | for receptacles | for plugs | | 736 813 | 737 814 | 738 812 742 810 |
| 8 | 76.20 | 15.21 | 15.03 | 18.64 | 14.68 | 11.63 | 4.40 |
| 10 | 76.20 | 15.21 | 15.03 | 21.82 | 17.86 | 14.81 | 4.40 |
| 12 | 88.90 | 15.21 | 15.03 | 25.40 | 22.63 | 17.98 | 4.40 |
| 14 | 88.90 | 15.21 | 15.03 | 28.57 | 25.81 | 22.76 | 4.40 |
| 16 | 88.90 | 15.21 | 15.03 | 31.75 | 29.39 | 25.93 | 4.40 |
| 18 | 88.90 | 15.21 | 15.03 | 34.92 | 32.16 | 29.11 | 4.40 |
| 20 | 101.60 | 15.21 | 15.03 | 38.10 | 35.33 | 32.28 | 4.40 |
| 22 | 101.60 | 15.21 | 15.03 | 41.27 | 38.51 | 35.46 | 4.40 |
| 24 | 101.60 | 15.21 | 15.03 | 44.45 | 41.68 | 38.63 | 4.40 |

Accessories

Strain relief clamp with grommet

(Replace XX-XX with the required insert arrangement)

62IN-585-XX-XXS or XXP

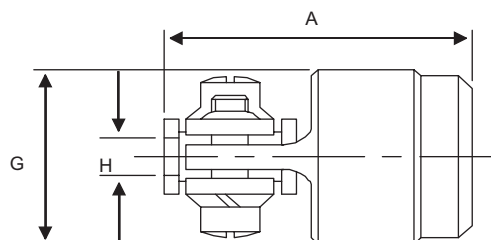



All dimensions in mm

| Shell size | A max | G max | H max |
|------------|----------|----------|----------|
| 8 | 25.17 | 21.03 | 4.09 |
| 10 | 25.17 | 22.63 | 4.90 |
| 12 | 25.17 | 25.81 | 8.05 |
| 14 | 24.51 | 28.98 | 9.65 |
| 16 | 28.07 | 30.56 | 12.83 |
| 18 | 28.07 | 36.22 | 16.00 |
| 20 | 32.64 | 36.22 | 16.00 |
| 22 | 32.64 | 39.80 | 19.18 |
| 24 | 34.88 | 44.07 | 20.45 |

Shell to accept conduit

(Replace XX with the required shell size)


62IN-776-XX

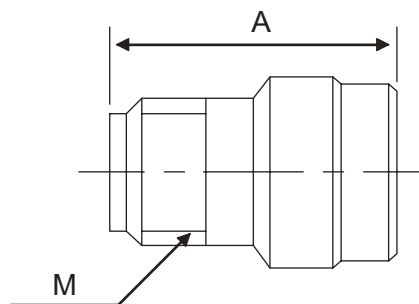

All dimensions in mm


| Shell size | A max | M Thread in inches |
|------------|----------|-----------------------|
| 8 | 23.80 | 1/2-28 UNEF |
| 10 | 23.80 | 5/8-24 NEF |
| 12 | 23.80 | 3/4-20 UNEF |
| 14 | 23.80 | 7/8-20 UNEF |
| 16 | 23.80 | 1-20 UNEF |
| 18 | 23.80 | 1 3/16-18 NEF |
| 20 | 23.80 | 1 3/16-18 NEF |
| 22 | 23.80 | 1 7/16-18 NEF |
| 24 | 23.80 | 1 7/16-18 NEF |

62IN - SQ Adaptors
For Shielded Cables

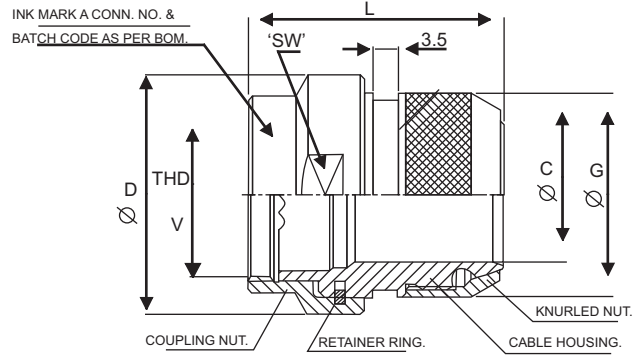

| SIZE | ATX P/NO. | 'V' THD. UNEF-2B | Ø C MIN. | Ø D MAX. | Ø G +0.5 -0.0 | L MAX. | SW -0.2 | RECOMMEN- DED TORQUE'S (Nm) |
|------|------------|---------------------|-------------|-------------|---------------------|-----------|------------|--------------------------------------|
| 08 | 62IN-08-SQ | 7/16 -28 | 6.6 | 20 | 16 | 36 | 18 | 4 +0.50 |
| 10 | 62IN-10-SQ | 9/16 -24 | 9.2 | 23 | 18 | 36 | 21 | 6 +0.50 |
| 12 | 62IN-12-SQ | 11/16 -24 | 12.2 | 27 | 22 | 36 | 24 | 8+1.0 |
| 14 | 62IN-14-SQ | 13/16 -20 | 15.2 | 30 | 25 | 37 | 28 | 10±1.0 |
| 16 | 62IN-16-SQ | 15/16 -20 | 18.3 | 33 | 28 | | 31 | |
| 18 | 62IN-18-SQ | 1 1/16 -18 | 20.0 | 36 | 32 | | 34 | 13±1.0 |
| 20 | 62IN-20-SQ | 1 3/16 -18 | 23.0 | 40 | 34 | | 37 | |
| 22 | 62IN-22-SQ | 1 5/16 -18 | 26.0 | 43 | 38 | | 41 | |
| 24 | 62IN-24-SQ | 1 7/16 -18 | 28.8 | 46 | 41 | 37 | 44 | |

62IN - Shrink Boot Adaptors
For Unshielded Cables

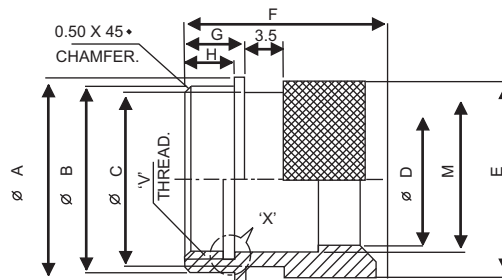



| SIZE | ATX P/NO | Ø 'A' -0.3 | Ø 'B' | Ø 'C' -0.2 | Ø 'D' +0.2 | Ø 'E' +0.5 | 'F' | 'G' | 'H' | 'V' THREAD. UNEF -2B | 'M' +0.1 | |
|------|-------------|---------------|-------|---------------|---------------|---------------|------|------|------|-------------------------|-------------|------|
| 08 | 62IN-108559 | 15.4 | 14.0 | 13.1 | 9.2 | 15.1 | 17.5 | 5.50 | 4.50 | 7/16 -28 | 10.2 | |
| 10 | 62IN-108560 | 18.6 | 17.0 | 15.9 | 12.1 | 17.9 | | | | 9/16 -24 | 13.3 | |
| 12 | 62IN-108561 | 21.8 | 20.3 | 21.2 | 15.1 | 23.2 | | | | 11/16 -24 | 16.5 | |
| 14 | 62IN-108562 | 25.0 | 23.3 | 22.1 | 18.4 | 24.0 | | | | 13/16 -20 | 19.5 | |
| 16 | 62IN-108563 | 28.2 | 26.4 | 26.0 | 21.6 | 29.3 | | | | 20.0 | 15/16 -20 | 22.6 |
| 18 | 62IN-108564 | 31.3 | 29.5 | 28.4 | 24.1 | 31.5 | | | | 20.0 | 1 1/16 -18 | 25.6 |
| 20 | 62IN-108565 | 34.5 | 32.7 | 32.3 | 27.3 | 35.6 | | | | 21.3 | 1 3/16 -18 | 28.8 |
| 22 | 62IN-108566 | 37.7 | 35.8 | 34.7 | 30.5 | 38.0 | | | | 21.3 | 1 5/16 -18 | 32.0 |
| 24 | 62IN-108567 | 40.9 | 39.0 | 37.9 | 33.7 | 41.0 | 20.0 | 5.00 | 4.00 | 1 7/16 -18 | 35.2 | |

Accessories

62IN-760-XX

Flange mounting gasket


(Replace XX with the required shell size)

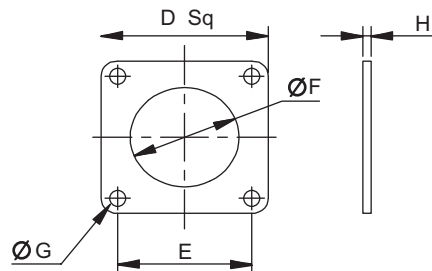

All dimensions in mm

| Shell size | D | E | F Dia | G Dia | H max |
|------------|-------|-------|-------|-------|-------|
| 8 | 20.62 | 15.08 | 12.90 | 3.30 | 1.06 |
| 10 | 23.82 | 18.26 | 16.07 | 3.30 | 1.06 |
| 12 | 26.18 | 20.65 | 19.25 | 3.30 | 1.06 |
| 14 | 28.57 | 23.01 | 22.42 | 3.30 | 1.06 |
| 16 | 30.96 | 24.61 | 25.60 | 3.30 | 1.06 |
| 18 | 33.32 | 27.00 | 28.77 | 3.30 | 1.06 |
| 20 | 36.52 | 29.36 | 31.95 | 3.30 | 1.06 |
| 22 | 39.70 | 31.75 | 35.13 | 3.30 | 1.06 |
| 24 | 42.87 | 34.92 | 38.30 | 3.96 | 1.06 |


PG Adaptors with 'O' ring

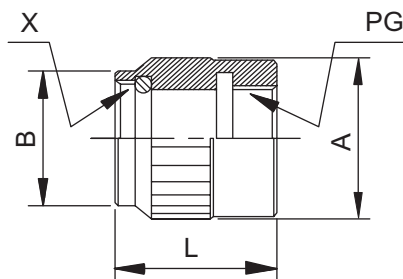

All dimensions in mm

| Part number | For shell size | X Thread in inches | A | B | L | PG Thread |
|---------------|----------------|--------------------|-------|-------|--------|-----------|
| 62IN08-PG7 | 8 | 7/16-28 UNEF | 16.50 | 14.50 | 20.00 | PG7 |
| 62IN10-PG9 | 10 | 9/16-24 NEF | 22.00 | 17.70 | 20.00 | PG9 |
| 62IN12-PG9 | 12 | 11/16-24 NEF | 22.00 | 21.00 | 20.00 | PG9 |
| 62IN14-PG13.5 | 14 | 13/16-20UNEF | 28.00 | 23.50 | 25.00 | PG13.5 |
| 62IN16-PG9 | 16 | 15/16-20 UNEF | 29.00 | 27.80 | 30.00 | PG 9 |
| 62IN18-PG16 | 18 | 1/16-18 NEF | 31.50 | 31.00 | 35 .00 | PG16 |
| 62IN20-PG21 | 20 | 13/16-18 NEF | 35.00 | 34.00 | 40.00 | Pg21 |
| 62IN24-PG16 | 24 | 17/16-18 NEF | 41.50 | 40.50 | 40.00 | PG16 |

EGM/PHM Adaptor

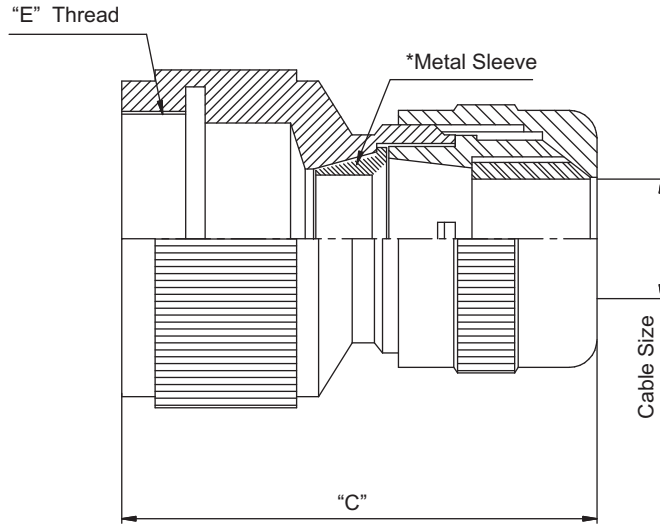


*EGM - Supplied with metal sleeve for shielded cable
 PHM - Supplied without metal sleeve for unshielded cable

| Shell size | "C" Ref. | PG Size (Cable Size in mm) | "E" Thread For Straight |
|------------|----------|----------------------------|-------------------------|
| 8 | 30.00 | PG 11 (4 to 10) | 7/16" -28 UNEF |
| 10 | | PG 11 (4 to 10) | 9/16" -24 NEF |
| 12 | | PG 11 (4 to 10) | 11/16" -24 NEF |
| 14 | | PG 21 (11 to 18) | 13/16" -20 UNEF |
| 16 | | PG 21 (11 to 18) | 15/16" -20 UNEF |
| 18 | | PG 21 (11 to 18) | 1 1/16" -20 UNEF |
| 20 | 35.00 | PG 21 (11 to 18) | 1 3/16" -18 UNEF |
| 22 | | PG 21 (11 to 18) | 1 5/16" -18 NEF |
| 24 | | PG 21 (11 to 18) | 1 7/16" -18 UNEF |


EGM/PHM11 Can accept cable Min 5.70 mm & Max 10.85 mm
 EGM/PHM21 Can accept cable Min 12.70 mm & Max 17.85 mm

Shrink Boot Adaptor

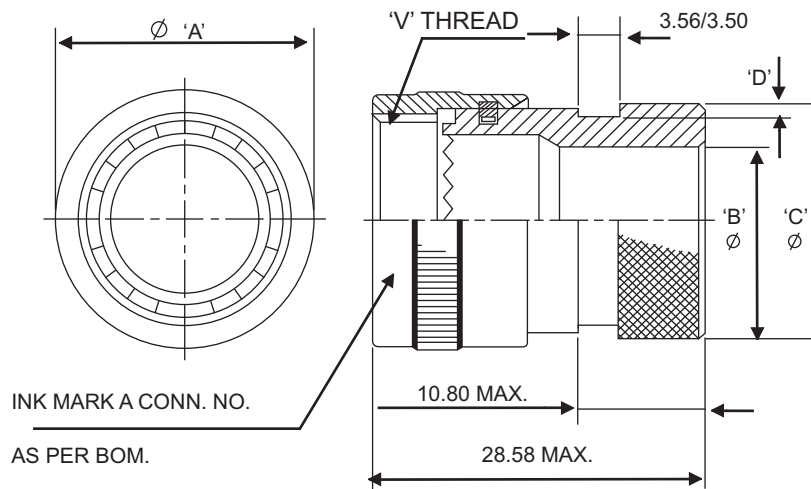


| SHELL SIZE | $\varnothing A$ MAX. | $\varnothing B$ MIN. | $\varnothing C$ + 0.0 - 0.51 | D + 0.20 - 0.0 | 'V' THREAD UNEF-2B | CONNECTORS P/NO. |
|------------|-------------------------|-------------------------|------------------------------------|----------------------|-----------------------|-----------------------|
| 08 | 15.67 | 6.35 | 13.54 | 1.12 | 7 / 16" -28 | M85049 / 60-1-W-8-IN |
| 10 | 18.64 | 9.02 | 15.37 | | 9 / 16" -24 | M85049 / 60-1-W-10-IN |
| 12 | 21.79 | 12.47 | 19.66 | | 11 / 16" -24 | M85049 / 60-1-W-12-IN |
| 14 | 24.99 | 14.35 | 21.29 | | 13 / 16" -20 | M85049 / 60-1-W-14-IN |
| 16 | 28.24 | 17.53 | 24.46 | | 15 / 16" -20 | M85049 / 60-1-W-16-IN |
| 18 | 30.94 | 19.53 | 26.47 | | 1 1 / 16" -18 | M85049 / 60-1-W-18 |
| 20 | 34.16 | 22.71 | 30.91 | 1.75 | 1 3 / 16" -18 | M85049 / 60-1-W-20 |
| 22 | 32.79 | 25.88 | 34.42 | | 1 5 / 16" -18 | M85049 / 60-1-W-22 |
| 24 | 40.46 | 28.80 | 36.65 | | 1 7 / 16" -18 | M85049 / 60-1-W-24 |

Right angle backshell

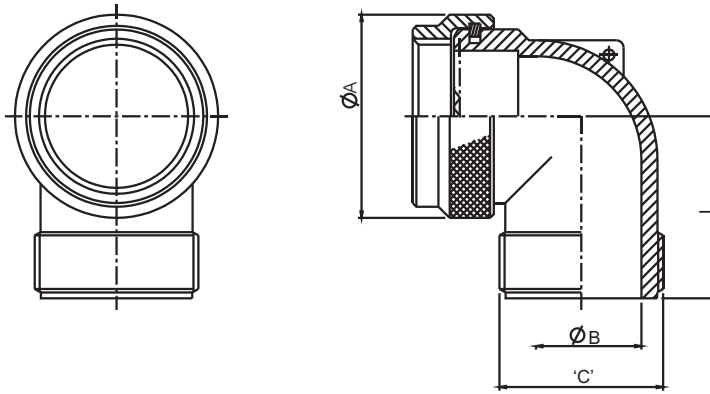

| Shell Size | DRG. No. | Ø A MAX. | Ø B ±0.13 | 'C' -2A THREAD. | L MAX. |
|------------|-----------|----------|-----------|-----------------|--------|
| 8 | 500238-8 | 18.85 | 7.30 | 9/16"-24NEF | 20.80 |
| 10 | 500238-10 | 21.70 | 10.18 | 5/8"-24UNEF | 21.70 |
| 12 | 500238-12 | 24.60 | 13.35 | 3/4"-20UNEF | 23.35 |
| 14 | 500238-14 | 27.85 | 16.26 | 7/8"-20UNEF | 24.85 |
| 16 | 500238-16 | 31.2. | 19.40 | 1"-20UNEF | 26.45 |
| 18 | 500238-18 | 34.15 | 22.00 | 1 3/16"-18UNEF | 28.70 |
| 20 | 500238-20 | 37.25 | 24.20 | | 29.60 |
| 22 | 500238-22 | 40.65 | 28.50 | 1 7/16"-18NEF | 31.60 |
| 24 | 500238-24 | 44.00 | 31.65 | | 33.60 |

JC Clamp backshell

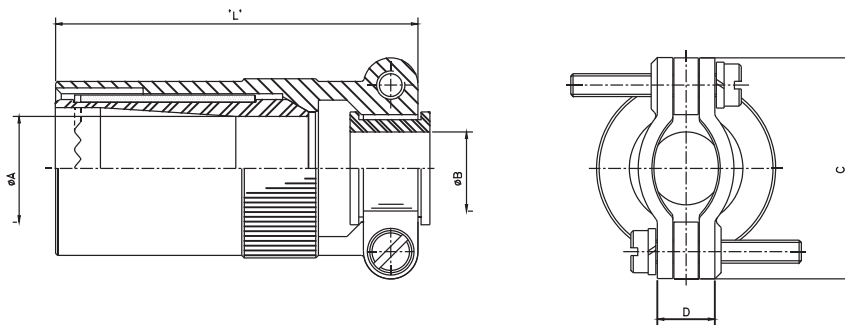

| Shell Size | A | | B ±0.13 | C MAX. | D MAX Closed | 'L' MAX. |
|------------|-------|-------|---------|--------|--------------|----------|
| | MIN. | MAX. | | | | |
| 8 | 4.28 | 5.84 | 3.96 | 21.03 | 4.75 | 40.50 |
| 10 | 5.21 | 7.93 | 4.78 | 22.63 | | |
| 12 | 8.59 | 11.23 | 7.93 | 25.81 | | |
| 14 | 10.57 | 13.69 | 9.58 | 28.97 | 8.26 | 48.00 |
| 16 | 13.97 | 15.65 | 12.70 | 30.56 | 9.04 | 54.50 |
| 18 | 15.24 | 17.07 | 15.88 | 36.22 | 11.58 | 59.00 |
| 20 | 16.13 | 18.98 | 15.88 | 36.22 | 13.18 | 67.00 |
| 22 | 17.02 | 21.49 | 19.05 | 39.80 | | 73.40 |
| 24 | 18.80 | 22.71 | 20.32 | 44.07 | | 77.00 |

Specials

Industrial version crimp contacts

62IN series connectors are also available with rear release crimp contacts for industrial applications. These contacts can be crimped to wires outside the connector and then inserted into place with the help of designated tools. Connector maintenance is simplified because damaged contacts can be removed by using the designated removal tool and replaced with a new contact. Spare contacts are also available.

Standard deviations for finishes & features

| Deviation number | Description |
|------------------|--|
| (4) | Gold flash on contacts |
| (5) | Crimp contact |
| (044) | Rough grip heavy duty coupling ring (for plugs only) |
| (218) | Coupling ring with lever arrangement |
| (219) | Film wire termination (short) for flexible printed wiring(57A and 12E styles only) |
| (220) | Film wire termination(long) for flexible printed wiring(57A and 12E styles only) |
| (416) | Electroless Nickel Plating |
| *(608) | Black anodised finish |
| (622) | Cadmium free zinc-cobalt Plating-olive drab finish |
| (624) | Cadmium free zinc-cobalt Plating-black finish |
| (0PX) | Premating contact(X denotes premating contact designation) |
| (714) | Cadmium over electroless Nickel |
| (720) | Cadmium plating with black chromate |
| (725) | Zinc plating with olive drab finish |
| (726) | Electrophoratic Finish |
| (56T) | Plug connector with threaded shell & serration to accept the cable accessories |
| (15A) | Plug connector with threaded shell to accept the cable accessories |
| (LC) | Less contact |
| (N00) | Connector without marking |
| (N01) | Connector with customer requested marking |

Specials

For special requirements, please contact factory with specifications and drawings. Amphenol has in-house capability to meet and custom build your special requirements for its range of MIL-C-26482 62IN series connectors.

* Consult factory for availability.

Recommended Tightening Torques

A) Single hole Fixing Receptacle (Panel Nut tightening)

| Shell Size | 8 | 10 | 12 | 14 | 16 | 18 | 20 | 22 | 24 |
|------------|------|------|------|------|------|------|-------|------|-------|
| Nm | 3.73 | 4.07 | 6.78 | 7.34 | 8.25 | 9.26 | 11.98 | 13.9 | 15.03 |
| Lbf.ins | 33 | 36 | 60 | 65 | 73 | 82 | 106 | 123 | 133 |

B) Accessory Tightening


| Shell Size | 8 | 10 | 12 | 14 | 16 | 18 | 20 | 22 | 24 |
|------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|------------|------------|
| Nm | 3.79-3.96 | 3.96-4.52 | 4.52-5.09 | 5.09-5.65 | 5.65-6.78 | 6.78-7.91 | 8.48-9.04 | 9.61-10.17 | 10.74-11.3 |
| Lbf.ins | 25-40 | 35-40 | 40-45 | 45-50 | 55-60 | 65-70 | 75-80 | 85-90 | 95-100 |

Crimping Tool

| MILITARY P/N | DMC P/N | DESCRIPTION |
|--------------|---------|-------------|
| M22520/1-01 | Af8 | Tool Frame |
| M22520/1-02 | TH1A | Turret |




Insertion & Removal Tool

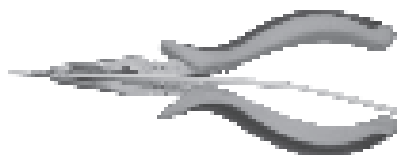

| Contact size | Insertion Removal Tool Part Number |
|--------------|------------------------------------|
| 20 | 62IN-IR-20 |
| 16 | 62IN-IR-16 |

Ordering 62IN series connectors

To obtain a specific connector number, write down the connector number from the typical example below. Only inserts shown on page 5 can be specified. Connectors are delivered with protective dust caps. Deviations specified on page 15 must be included at the end of the connector number whenever required.

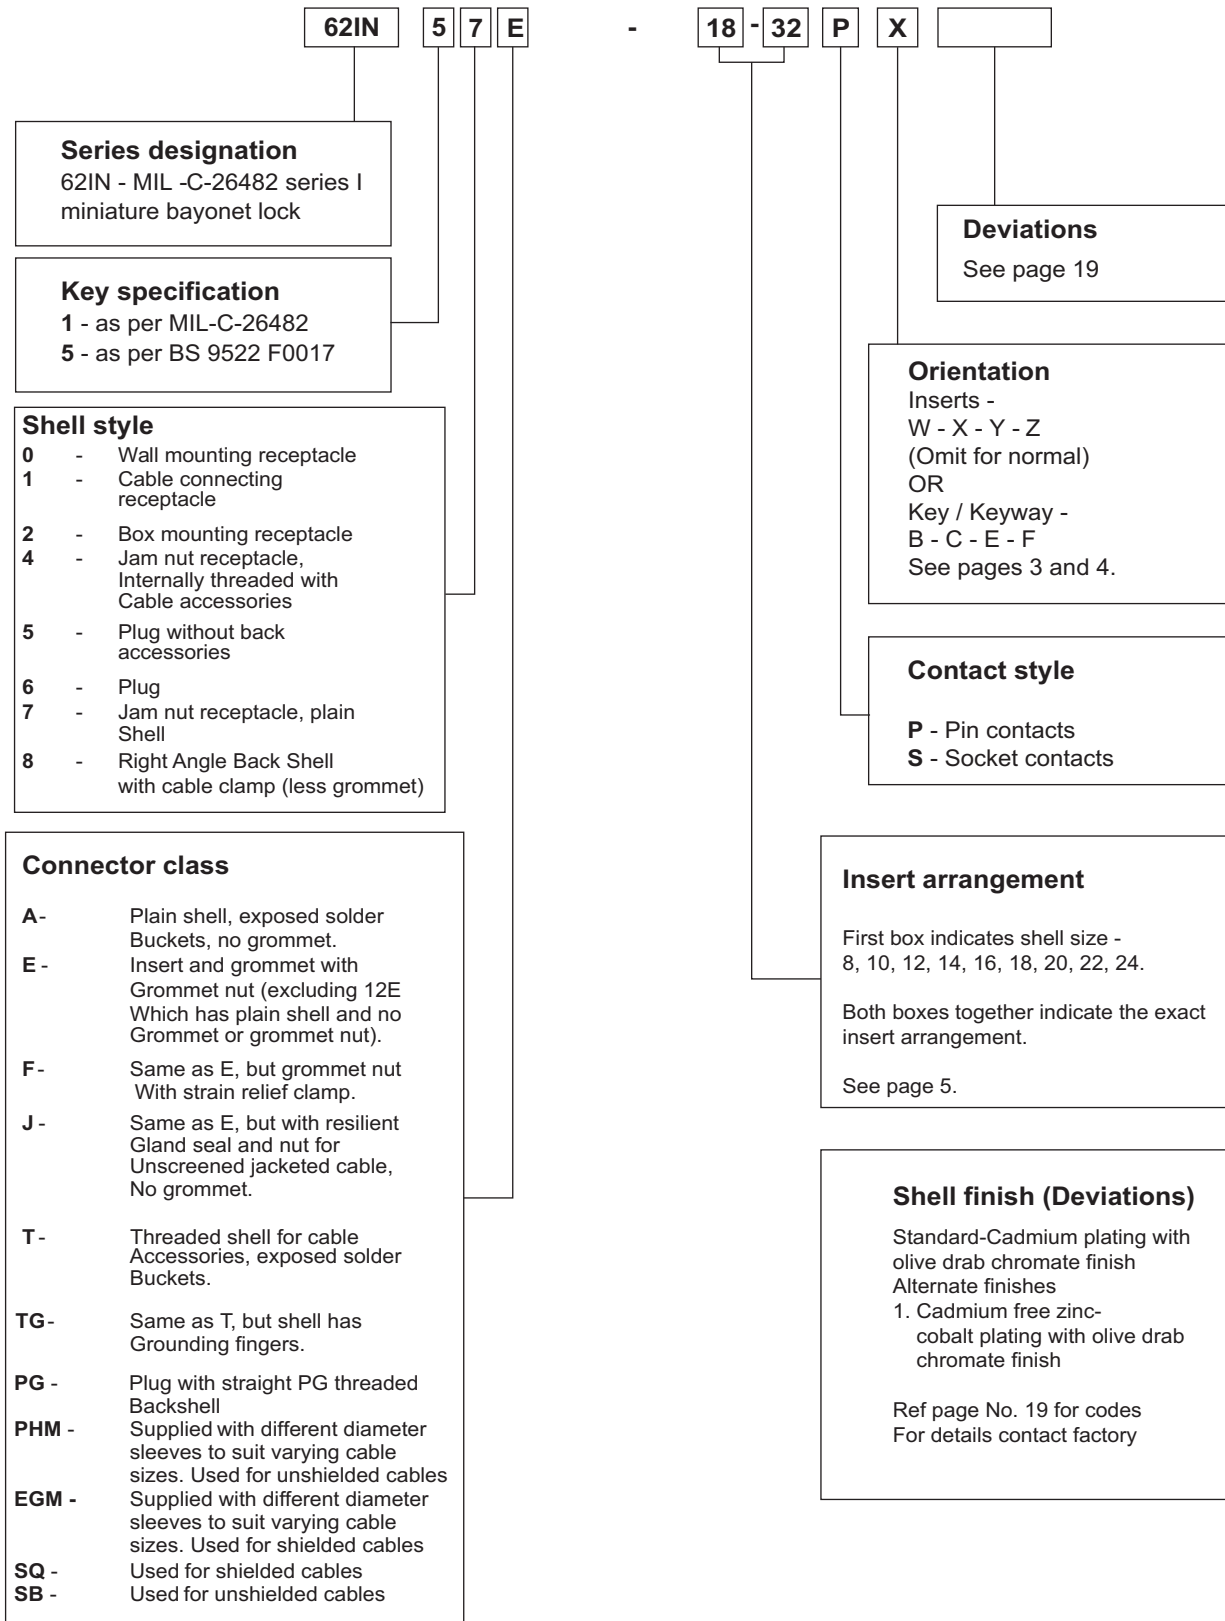

Notice: All information, including illustrations given herein is believed to be accurate at the time of printing. In lieu of design advances, Amphenol reserves the right to change specifications without notice. This publication ACR 01/10 supersedes all existing Amphenol literature on 62IN series connectors.

Amphenol

A Global Company



Pune Operations



Bangalore Operations

Amphenol

Interconnect India Pvt. Ltd.

Our offices in India:

MARKETING HEAD QUARTERS

105, Bhosari Industrial Area,
Pune - 411 026.
Tel.: 91- 020 - 30688303, 30688304
Fax : 91 - 020 - 30688321
Email : vbhavsar@amphenol-in.com
sales@amphenol-in.com

Southern Region

4931, 11th Floor, High Point IV
45, Palace Road, Bangalore 560 001.
Tel.: 91-80-22281392, 22281002
Fax : 91-80-22253859
Email : kmanoj@amphenol-in.com

Northern and Eastern Region

1414, 14th Floor, Chiranjiv Tower,
43, Nehru Place, New Delhi - 110 019.
Tel. : 91-11-26449177
Telefax : 91-11-26449176
Email : sunily@amphenol-in.com

Export

105, Bhosari Industrial Area,
Pune - 411 026, India.
Tel.: 91- 20 - 30688305, 30688334
Fax : 91- 20 - 27129158
Email : svpatil@amphenol-in.com

Western Region

105, Bhosari Industrial Area,
Pune - 411 026.
Tel.: 91- 20 - 27119735, 30688334
Fax: 91- 20 - 27120581, 27119735
Email : sunilp@amphenol-in.com

Central Region

107, 1st Floor, 'Am Sri Classic',
Sarojinidevi Road, Secunderabad-500 003.
Telefax : 91- 40-66332906
Email : pprasad@amphenol-in.com

www.amphenol-in.com