

|                           |                        |                                                                                     |
|---------------------------|------------------------|-------------------------------------------------------------------------------------|
| 10422505                  | <b>DATA SHEET</b>      |  |
| Valid from:<br>20.11.2024 | <b>EPIC® H-A 3 MEG</b> |                                                                                     |

**Description**

- Innovative metal housing
- For safe connections in the smallest possible space

**General characteristics**

|                                     |                                                         |
|-------------------------------------|---------------------------------------------------------|
| Series                              | H-A 3                                                   |
| Version                             | Screw mounted housing                                   |
| Locking mechanism                   | Single lever                                            |
| Protection rating (DIN EN 60529)    | IP 66 (latched)<br>IP 68 - 1 meter / 10 hours (latched) |
| Protection rating (NEMA 250, UL50E) | 4, 12 (latched)                                         |
| Temperature range                   | -40 °C to +100 °C, short-term up to +125 °C             |



**Materials and surfaces**

|                        |                      |
|------------------------|----------------------|
| Housing, base material | Zinc die-casting     |
| Housing, surface       | Powder-coating, grey |
| Lever                  | Steel, zinc-plated   |
| Gasket                 | NBR                  |

**Standard**


|                 |                  |
|-----------------|------------------|
| Safety Standard | IEC 61984, UL50E |
|-----------------|------------------|


**Approvals**

|                            |        |
|----------------------------|--------|
| UL-Approval, E-File-Number | E75770 |
|----------------------------|--------|

|                           |                        |                                                                                     |
|---------------------------|------------------------|-------------------------------------------------------------------------------------|
| 10422505                  | <b>DATA SHEET</b>      |  |
| Valid from:<br>20.11.2024 | <b>EPIC® H-A 3 MEG</b> |                                                                                     |

Technical Drawings

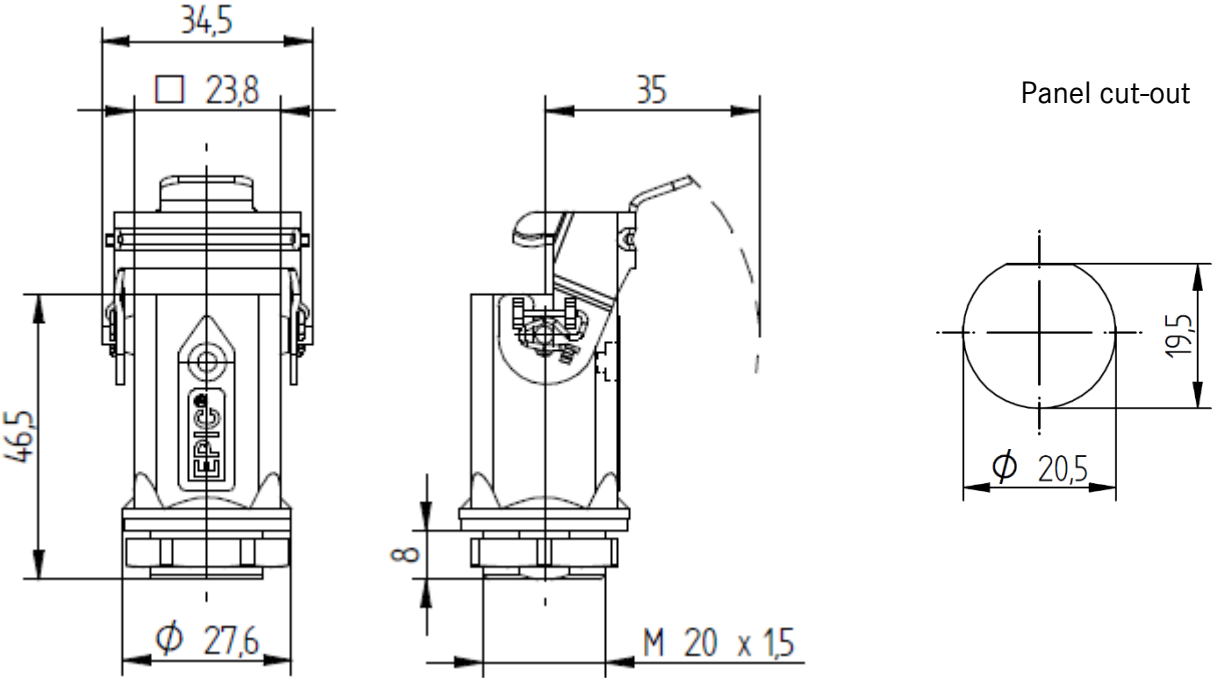



Industrial machinery and plant engineering



Mechanical resistance



Robust



Waterproof

**Info**  
Compact, robust metal housings size H-A 3

**Application range**  
Machine and equipment manufacturing  
Control engineering  
Electronic laboratory

**Remark**  
Photographs are not to scale and do not represent detailed images of the respective products.