

19082900	<b>DATA SHEET</b>	
Valid from: 26.07.2024	<b>EPIC® H-B 16 TS-RO</b>	

Description

- The housing standard.
- Wide choice for all applications.



General Characteristics

Series	H-B 16
Version	Hood M25/ M32 (Article 19092900)
Locking	Bolts with plastic rollers for single lever
Gland body	Yes
Cable entry	Side
Protection (DIN EN 60529)	IP 65 (latched)
Protection (NEMA 250, UL50E)	12 (latched)
Temperature Range	-40°C to +100°C, short term up to +125°C

Materials and Surfaces



Housing	Aluminium alloy, powder-coated, grey
Bolt with reels	Heat-treatable steel, zinc-plated / PA
Gland body	Brass, nickel plated

Standard


Safety Standard	IEC 61984
-----------------	-----------

19082900	<b>DATA SHEET</b>	
Valid from: 26.07.2024	EPIC® H-B 16 TS-RO	

## Technical Drawings

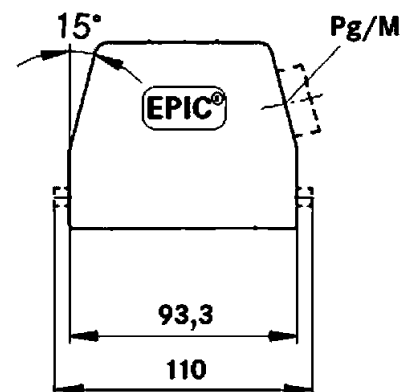

Automation



Industrial machinery and plant engineering



Mechanical resistance



Robust



Waterproof

### Info

Universal, robust metal housings size H-B 16

### Application range

Plant engineering  
Light & sound technology  
Plastics industry

### Remark

Photographs are not to scale and do not represent detailed images of the respective products.

Creator: THB01/BU-EPIC Released: IVSE1/BU-EPIC	Document: DB19082900EN Version: 02	Page 2 of 2
---	---------------------------------------	-------------