

| | | |
|---------------------------|-------------------------------|--|
| 15350000 | DATA SHEET |  |
| Valid from: 2023-11-15 | ÖLFLEX® TRAIN 350 300V | |


Application

ÖLFLEX® TRAIN 350 are halogen-free, highly flame retardant cables for use in railway vehicles. They are designed for fixed installation and for applications, where limited movement may occur. They are particularly used in areas, where human and animal life as well as valuable property are exposed to high risk of fire hazards. ÖLFLEX® TRAIN 350 are oil-, fuel-, acid- and alkali resistant acc. to EN 50264-3-2.

Application range:

railway vehicles: connecting lamps, heating equipment, switchgear, terminal boxes and power supply

Design

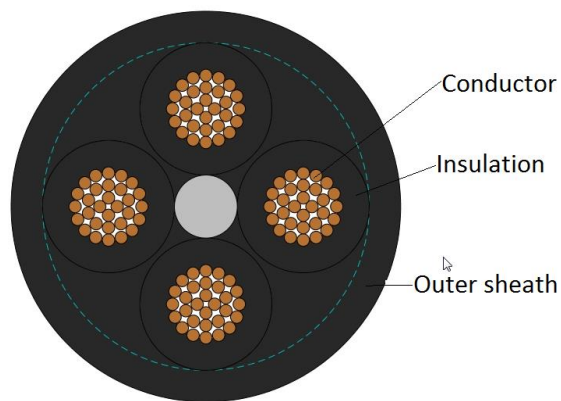

| | |
|---------------------|--|
| Norm references | EN 50264-3-2. Code designation MM MM = extra low temperature, extra oil and fuel resistant |
| Classification | EN 45545-2: Hazard Level HL1, HL2, HL3 NF F 16-101: Internal Category A1, A2, B External Category A1, A2, B Category C for flame propagation Category F0 for smoke |
| Conductor | fine wire strands of tinned copper acc. to IEC 60228 resp. EN 60228, Class 5 |
| Core isolation | electron beam cross-linked polymer compound EI 109 acc. to EN 50264-1 |
| Core identification | acc. to EN 50264-3-2, with or without GN/YE ground conductor black cores with white numbers acc. to DIN EN 50334 |
| Outer sheath | electron beam cross-linked polymer compound, halogen free and flame retardant, EM 104 acc. to EN 50264-1 colour: Black, similar RAL 9005 |

Electrical properties at 20 °C

| | |
|-------------------------------------|--------------------------------------|
| Nominal voltage | U_0 / U : 300/500 V AC |
| Max. permissible operating voltage: | U_m : 600 V AC V_0 : 450 V DC |
| Test voltage | core / core: 2 kV AC; 4.8 kV DC |

| | | |
|---|---------------------------------------|-------------|
| Creator: HESC/PDC Released: ALTE/PDC | Document: DB15350000EN Version: 05 | Page 1 of 3 |
|---|---------------------------------------|-------------|

| | | |
|---------------------------|-------------------------------|--|
| 15350000 | DATA SHEET |  |
| Valid from: 2023-11-15 | ÖLFLEX® TRAIN 350 300V | |

Mechanical and thermal properties

| | |
|---------------------------|---|
| Min. bending radius | <p>Outer diameter \leq 12.0 mm for cautions bending (one bend at end of core): 3 x outer diameter fixed installation: 4 x outer diameter occasional flexing: 5 x outer diameter</p> <p>Outer diameter $>$ 12.0 mm for cautions bending (one bend at end of core): 4 x outer diameter fixed installation: 5 x outer diameter occasional flexing: 6 x outer diameter</p> |
| Temperature range | <p>fixed installation: -45 °C up to +120 °C max. conductor temp. (20.000h) occasional flexing: -35 °C up to +120 °C max. conductor temp. (20.000h)</p> <p>- 50° acc. to GOST 33326-2015 and GOST 20.57.406-81 (method 203-1 und 205-1)</p> |
| Short circuit temperature | max. +200°C (5s) |

Fire protection according to EN 50264-1 / EN 45545-2:

| | |
|----------------|---|
| Classification | EN 45545-2: Hazard Level HL1, HL2, HL3 |
| Flammability | <p>flame retardand acc. IEC 60332-1-2 resp. EN 60332-1-2 no flame propagation acc. to:</p> <p>\geq 12 mm: IEC 60332-3-24 resp. EN 60332-3-24 $>$ 6 mm und $<$ 12mm: IEC 60332-3-25 resp. EN 60332-3-25 \leq 6 mm: EN 50305, clause 9.1.2</p> |
| Smoke density | <p>acc. to EN 50264-1, light transmission: min. 70% acc. to IEC 61034-2 resp. EN 61034-2</p> |
| Halogen-free | <p>acc. to IEC 60754-1 resp. EN 60754-1 (chlorine and bromine) acc. to EN 60684-2 (fluorine)</p> |
| Corrosivity | <p>acc. to EN 50264-1, pH \geq 4.3 and conductivity \leq 10 μS/mm acc. to IEC 60754-2 resp. EN 60754-2</p> |
| Toxicity | <p>acc. to EN 50264-1 (\leq 3) acc. to EN 50305</p> |

Fire protection according to NF:

| | |
|----------------|--|
| Classification | NF F 16-101: Internal Category A1, A2, B External Category A1, A2, B Category C for flame propagation Category F0 for smoke |
| Flammability | acc. to NF C 32-070, Category C1 and C2 |
| Smoke density | acc. to NF X 10-702 |
| Toxicity | acc. to NF X 70-100 |

| | | |
|---|---------------------------------------|-------------|
| Creator: HESC/PDC Released: ALTE/PDC | Document: DB15350000EN Version: 05 | Page 2 of 3 |
|---|---------------------------------------|-------------|

| | | |
|---------------------------|-------------------------------|--|
| 15350000 | DATA SHEET |  |
| Valid from: 2023-11-15 | ÖLFLEX® TRAIN 350 300V | |

Material properties

| | |
|----------------------------|--|
| Ozone resistance | acc. to EN 50264-3-2, method B acc. to EN 50305 |
| Mineral oil resistance | acc. to EN 50264-3-2 |
| Fuel resistance | acc. to EN 50264-3-2 |
| Acid and alkali resistance | acc. to EN 50264-3-2 |
| UV resistance | acc. to EN 50525-1 are cables with black sheath suitable for a permanent outdoor use. |
| Tests | acc. to EN 50264-3-2 |
| EU Directives | These cables are conform to the EU-Directives 2014/35/EC (Low Voltage Directive) |
| Environmental information | These cables meet the substance-specific requirements of the EU Directive 2011/65/EU (RoHS). |

| Art. No. | Number of cores x cross section [mm ²] | Max. wire ø [mm] | Max. conductor resistance (20°C) [Ohm/km] | Conductor ø reference value [mm] | Core ø reference value [mm] | Outer ø [mm] | Fire load reference value [kJ/m] | Weight [kg/km] |
|----------|--|------------------|---|----------------------------------|-----------------------------|---------------|----------------------------------|----------------|
| 15350000 | 2X1 | 0.21 | 20.0 | 1.3 | 2.1 | 5.4 -0.1+0.6 | 564 | 54 |
| 15350001 | 4X1 | 0.21 | 20.0 | 1.3 | 2.1 | 6.2 -0.1+0.6 | 690 | 81 |
| 15350002 | 7X1 | 0.21 | 20.0 | 1.3 | 2.1 | 7.7 -0.2+0.5 | 985 | 128 |
| 15350003 | 9X1 | 0.21 | 20.0 | 1.3 | 2.1 | 9.6 -0.3+0.4 | 1500 | 179 |
| 15350004 | 12X1 | 0.21 | 20.0 | 1.3 | 2.1 | 10.1 -0.3+0.6 | 1439 | 204 |
| 15350005 | 19X1 | 0.21 | 20.0 | 1.3 | 2.1 | 12.1 -0.4+0.5 | 2051 | 309 |
| 15350006 | 24X1 | 0.21 | 20.0 | 1.3 | 2.1 | 14.4 -0.3+0.6 | 2683 | 396 |
| 15350007 | 32X1 | 0.21 | 20.0 | 1.3 | 2.1 | 15.9 -0.4+0.7 | 3447 | 520 |
| 15350008 | 37X1 | 0.21 | 20.0 | 1.3 | 2.1 | 16.7 -0.5+0.6 | 3642 | 580 |
| 15350009 | 40X1 | 0.21 | 20.0 | 1.3 | 2.1 | 17.8 -0.5+0.7 | 4212 | 644 |
| 15350010 | 4X1.5 | 0.26 | 13.7 | 1.6 | 2.6 | 7.6 -0.3+0.4 | 946 | 116 |
| 15350011 | 7X1.5 | 0.26 | 13.7 | 1.6 | 2.6 | 9.2 -0.3+0.4 | 1348 | 184 |
| 15350012 | 9X1.5 | 0.26 | 13.7 | 1.6 | 2.6 | 11.7 -0.4+0.5 | 2323 | 273 |
| 15350013 | 12X1.5 | 0.26 | 13.7 | 1.6 | 2.6 | 12.4 -0.4+0.5 | 2093 | 302 |
| 15350014 | 19X1.5 | 0.26 | 13.7 | 1.6 | 2.6 | 15.0 -0.4+0.5 | 3230 | 473 |
| 15350015 | 24X1.5 | 0.26 | 13.7 | 1.6 | 2.6 | 17.3 -0.5+0.6 | 3749 | 577 |
| 15350016 | 32X1.5 | 0.26 | 13.7 | 1.6 | 2.6 | 19.6 -0.5+0.6 | 5139 | 778 |
| 15350017 | 37X1.5 | 0.26 | 13.7 | 1.6 | 2.6 | 20.6 -0.6+0.7 | 5625 | 879 |
| 15350018 | 4X2.5 | 0.26 | 8.21 | 2.0 | 3.0 | 8.6 -0.3+0.5 | 1183 | 169 |
| 15350019 | 7X2.5 | 0.26 | 8.21 | 2.0 | 3.0 | 10.6 -0.4+0.6 | 1652 | 270 |
| 15350020 | 9X2.5 | 0.26 | 8.21 | 2.0 | 3.0 | 13.7 -0.4+0.6 | 3013 | 402 |
| 15350021 | 12X2.5 | 0.26 | 8.21 | 2.0 | 3.0 | 14.5 -0.4+0.6 | 2786 | 461 |
| 15350022 | 19X2.5 | 0.26 | 8.21 | 2.0 | 3.0 | 17.0 -0.5+0.7 | 3629 | 680 |
| 15350023 | 24X2.5 | 0.26 | 8.21 | 2.0 | 3.0 | 20.1 -0.5+1.1 | 4909 | 879 |

| | | |
|---|---------------------------------------|-------------|
| Creator: HESC/PDC Released: ALTE/PDC | Document: DB15350000EN Version: 05 | Page 3 of 3 |
|---|---------------------------------------|-------------|