


55000580	DATA SHEET	
Valid from: 03.07.2018	SILVYN® ELG	

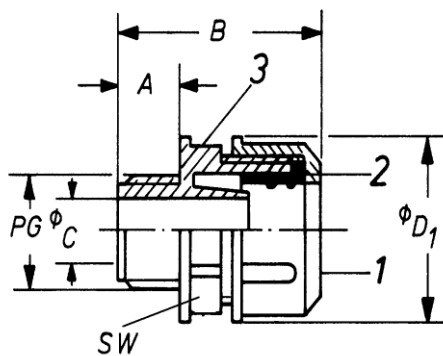

1. Cup nut

2. Clamping seal

3. Body

Dimensions table:

Part No.	Description	Thread-connection-size	A mm	B mm	C mm	D ₁ mm	wrench size mm
5500 0580	SILVYN® ELG	PG 7	11	36	8	24	19
5500 0590	SILVYN® ELG	PG 9	11	38	10	27	22
5500 0600	SILVYN® ELG	PG 11	12	44	14	32	27
5500 0610	SILVYN® ELG	PG 13,5	12	44	15	32	27
5500 0620	SILVYN® ELG	PG 16	15	49	19	42	30
5500 0630	SILVYN® ELG	PG 21	15	47	23	45	39
5500 0640	SILVYN® ELG	PG 29	15	52	26	48	41
5500 0650	SILVYN® ELG	PG 36	18	55	33	56	49
5500 0660	SILVYN® ELG	PG 42	19	59	38	62	57
5500 0670	SILVYN® ELG	PG 48	20	61	47	75	68

Material:
 Body: polypropylene
 Clamping seal: polyamide

Colour:
 grey RAL 7001

Protection class: IP65

Temperature range: -20°C up to +60°C

Flammability: V2 (UL 94)

Approvals: 

For more information please see our current catalogue. Please do not hesitate to contact our laboratory if there are any questions regarding resistance against aggressive agents and special oil.

Creator: PDP Released: DAMU1/PDP	Document: DB55000580EN Version: 01	Page 1 of 1
-------------------------------------	---------------------------------------	-------------