


55000680	DATA SHEET	
Valid from: 09.07.2018	SILVYN® ELW	

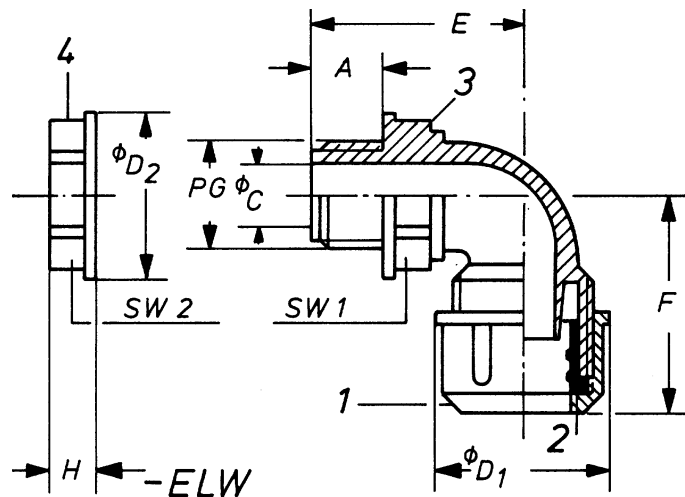

Dimensions table:

Artikel Nr.	Description	Connection thread	A	ϕC	ϕD_1	ϕD_2	ϕD_3	E	F	H	SW 1	SW 2
			mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
5500 0680	SILVYN® ELW	PG 7	11	8	24	22	22	30	37	7	19	19
5500 0690	SILVYN® ELW	PG 9	10,5	10	27	32	25	34,5	37,5	7	22	27
5500 0700	SILVYN® ELW	PG 11	13,5	14	33	32	32	39,5	33	8	26	27
5500 0710	SILVYN® ELW	PG 13,5	13,5	14	33	32	32	39,5	33	8	26	27
5500 0720	SILVYN® ELW	PG 16	17	19	43	42	41	50	54	10	34	35
5500 0730	SILVYN® ELW	PG 21	13,5	23	45	47	42,5	47,5	57	10	38	42
5500 0740	SILVYN® ELW	PG 29	18,5	26	47	56,5	47	58,5	66	10	42	50
5500 0750	SILVYN® ELW	PG 36	18	32	56	63	56	63	72	10	49	58

Material: Body: polypropylene
Clamping seal: polyamide

Colour: RAL 7001 grey

Protection class: IP 65

Temperature range: -20°C bis +60°C

Flammability: V2 (UL 94)

Approval:



For more information please see our current catalogue. Please do not hesitate to contact our laboratory if there are any questions regarding resistance against aggressive agents and special oil.

Creator: PDP Released: DAMU1/PDP	Document: DB55000680EN Version: 01	Page 1 of 1
-------------------------------------	---------------------------------------	-------------