


55502190	DATA SHEET	
Valid from: 09.07.2018	SILVYN® ELG-M	

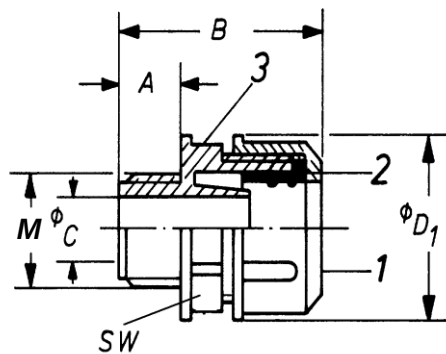

1. Cap nut

2. Clamping seal

3. Body

Dimensions table:

Part no.	Description	connecting thread M	A mm	B mm	C mm	D ₁ mm	Wrench size mm
5550 2190	SILVYN® ELG-M	M12x1,5	11	36	8,0	23,5	19
5550 2200	SILVYN® ELG-M	M16x1,5	11	35,5	10,0	27	22
5550 2210	SILVYN® ELG-M	M20x1,5	13	43	13,5	33	27
5550 2220	SILVYN® ELG-M	M25x1,5	14	46	17,5	38	33
5550 2230	SILVYN® ELG-M	M32x1,5 / 1	14	48	21,0	45	36
5550 2240	SILVYN® ELG-M	M32x1,5 / 2	16,5	53,5	25,0	47	42
5550 2250	SILVYN® ELG-M	M40x1,5	17	51	30,0	52	51
5550 2260	SILVYN® ELG-M	M50x1,5	19,5	58	35,5	63	58
5550 2270	SILVYN® ELG-M	M63x1,5	20	62	47,5	75	68

Material:
 Body: PP (polypropylene)
 Seal: PA (polyamide)

Colour:
 silver grey RAL 7001

Protection class: IP65

Temperature range: -20°C to +60°C

Flammability: V2 (UL 94)

Approvals: 

For more information please see our current catalogue. Please do not hesitate to contact our laboratory if there are any questions regarding resistance against aggressive agents and special oil.

Creator: D. Müller /PDP Released: DAMU1/PDP	Document: DB55502190EN Version: 03	Page 1 of 1
--	---------------------------------------	-------------