


55503250	DATA SHEET	
Valid from: 03.07.2018	SILVYN® AMHW-M 45°	

The SILVYN® AMWW-M 50° conduit gland, forms in combinations with the Anaconda Sealtite® protective conduit a unit that is impervious to liquids and ensures continuous earthing in acc. to VDE 0113/12.73

Components:

Gland body: brass nickel plated
Grounding sleeve: steel galvanized
Connecting part: inner PA insulated

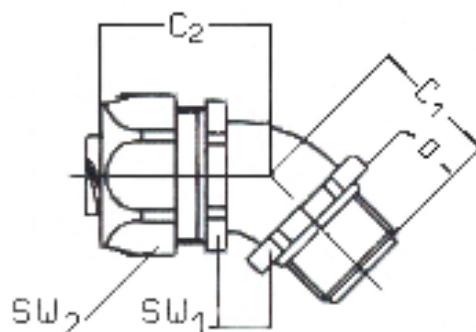

Part No.	Description	for conduit		C ₁	C ₂	D	SW ₁	SW ₂	minimum inner Ø
5550 3250	SILVYN® AMHW-M 16x1,5	SILVYN® , -EF, -OR, -HTDL, -HCX, -HFX	³ / ₈ “	23	33	12	22	26	10,2
5550 3251	SILVYN® AMHW-M 20x1,5		¹ / ₂ “	25	33	13	27	29	13,9
5550 3252	SILVYN® AMHW-M 25x1,5		³ / ₄ “	30	36	15	33	35	18,5
5550 3253	SILVYN® AMHW-M 32x1,5		1“	34	46	15	42	45	23,8
5550 3254	SILVYN® AMHW-M 40x1,5		1 ¹ / ₄ “	39	54	16	51	54	31,8
5550 3255	SILVYN® AMHW-M 50x1,5		1 ¹ / ₂ “	45	59	18	60	63	36,8
5550 3256	SILVYN® AMHW-M 63x1,5		2“	53	71	20	74	77	47,8

Connecting thread: M 16x1.5 up to M 63x1.5

Temperature range: -45°C up to +105°C

Approval:



Protection class: IP 67

For more information please see our current catalogue. Please do not hesitate to contact our laboratory if there are any questions regarding resistance against aggressive agents and special oil.

Creator: PDP Released: DAMU1/PDP	Document: DB55503250EN Version: 01	Page 1 of 1
-------------------------------------	---------------------------------------	-------------