


55503260	DATA SHEET	
Valid from: 03.07.2018	SILVYN® AMW-M 90°	

The SILVYN® AMW-M 90° conduit gland, forms in combinations with the Anaconda Sealtite® protective conduit a unit that is impervious to liquids and ensures continuous earthing in acc. to VDE 0113/12.73

Components:

Gland body	brass nickel plated
Grounding sleeve	steel galvanized
Connecting part	inner PA insulated

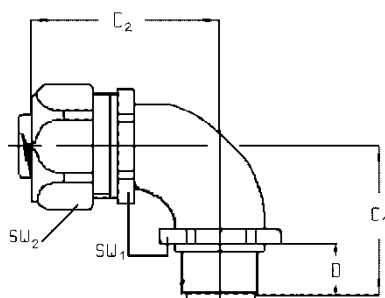

Part No.	Description	for conduit		C ₁	C ₂	D	SW ₁	SW ₂	minimum inner Ø
5550 3260	SILVYN® AMW-M 16x1,5	SILVYN®, -EF, -OR, -HTDL, -HCX, -HFX	³ / ₈ “	32	42	12	22	26	10,2
5550 3261	SILVYN® AMW-M 20x1,5		¹ / ₂ “	36	43	13	27	29	13,9
5550 3262	SILVYN® AMW-M 25x1,5		³ / ₄ “	43	48	15	33	35	18,5
5550 3263	SILVYN® AMW-M 32x1,5		1“	48	59	15	42	45	23,8
5550 3264	SILVYN® AMW-M 40x1,5		1 ¹ / ₄ “	57	68	16	51	54	31,8
5550 3265	SILVYN® AMW-M 50x1,5		1 ¹ / ₂ “	63	78	18	60	63	36,8
5550 3266	SILVYN® AMW-M 63x1,5		2“	74	96	20	74	77	47,8

Connecting thread: M 16x1.5 up to M 63x1.5

Temperature range: -45°C up to +105°C

Approval:



Protection class: IP 67

For more information please see our current catalogue. Please do not hesitate to contact our laboratory if there are any questions regarding resistance against aggressive agents and special oil.

Creator: PDP Released: DAMU1/PDP	Document: DB55503260EN Version: 02	Page 1 of 1
-------------------------------------	---------------------------------------	-------------