
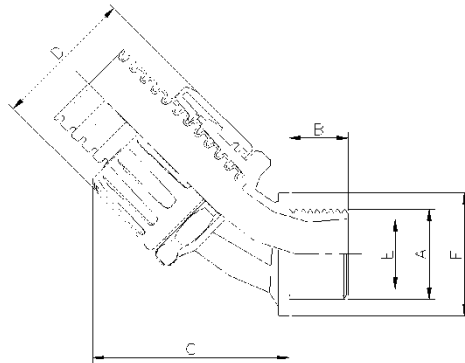


55506415	DATA SHEET	
Valid from: 03.07.2018	SILVYN® FPAHW-M	


Specification:

The SILVYN® FPAHW-M angle conduit gland provides a high tensile strength with its all-round teeth and vibrations protection. The gland can be removed from the conduit using a tooling (small screwdriver).



Dimensions table:

part number	measurement M	A mm	B mm	C mm	D mm	F mm	suitable for SILVYN FPAS
5550 6415	M 20x1,5/1	29,0	15,0	41,0	13,0	28,0	16
5550 6425	M 20x1,5/2	32,0	15,0	43,0	13,0	30,0	21
5550 6435	M 25x1,5	44,0	19,0	58,0	15,0	42,0	28
5550 6445	M 32x1,5	51,0	25,0	65,0	16,0	49,0	34
5550 6455	M 50x1,5/1	63,0	39,0	82,0	16,0	70,0	42
5550 6565	M 50x1,5/2	76,0	40,0	90,0	16,0	73,0	54

55506415	DATA SHEET	
Valid from: 03.07.2018	SILVYN® FPAHW-M	

Technical feature:

temperature range: -40°C up to +135°C
 colour: black RAL 9005, grey RAL 7011
 material: PA 66
 protections class: IP 66
 fire class: UL 94 V2

Characteristics:

halogen free
 flame retardant
 low toxicity
 oil and solvent resistant
 UV resistant in black

Approval:



For more information please see our current catalogue. Please do not hesitate to contact our laboratory if there are any questions regarding resistance against aggressive agents and special oil.

Creator: PDP Released: DAMU1/PDP	Document: DB55506415EN Version: 01	Page 2 of 2
-------------------------------------	---------------------------------------	-------------