


55506715	<b>DATA SHEET</b>	
Valid from: 03.07.2018	<b>SILVYN® FPAG 90° PG</b>	

SILVYN® FPAG 90° PG is a conduit gland with a fast fit for a safety assembling. For the demounting we are recommending to use a screwdriver. The gland is suitable for SILVYN® FPAS and can be used in the machine- and plant constructions.



**Material:** PA 66

**Features:** Fast assembly  
Anti-vibration  
Suitable for fine and coarse conduits  
High mechanical strength

**Temperature range:** -50°C up to +135°C


**Colour:** Grey  
Black (UV-Resistant)


**Norm Reference:**    **UL FILE NUMBER E308201**

**Note:** Free of Halogen, Sulphur and Phosphorous

**Protection class:** IP 66

Creator: M. Wegerer /PDP Released: DAMU1/PDP	Document: DB55506715EN Version: 02	Page 1 of 2
---	---------------------------------------	-------------

55506715	<b>DATA SHEET</b>	
Valid from: 03.07.2018	<b>SILVYN® FPAG 90° PG</b>	

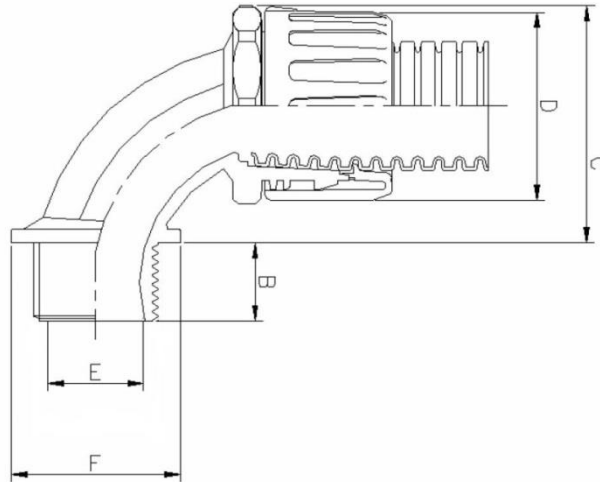

**Dimension table:**

Part No.	Part name	NW	Length C mm	Thread Length B mm	Inner Ø E mm	Outer Ø D mm	Ø F mm
<b>Grey</b>							
5550 6710	SILVYN® FPAG 90° PG 7 GY	10	24	8	6,5	19	16
5550 6720	SILVYN® FPAG 90° PG 9 GY	13	36	10	10,5	24	22
5550 6730	SILVYN® FPAG 90° PG 11 GY	16	39	10	10,5	29	24
5550 6740	SILVYN® FPAG 90° PG 13,5/1 GY	16	40	11	14	29	26
5550 6750	SILVYN® FPAG 90° PG 13,5/2 GY	18	42	11	14	32	26
5550 6810	SILVYN® FPAG 90° PG 13,5/3 GY	21	42	11	14	32	26
5550 6760	SILVYN® FPAG 90° PG 16 GY	21	42	11	14	32	27
5550 6770	SILVYN® FPAG 90° PG 21 GY	28	54	12	19	44	35
5550 6780	SILVYN® FPAG 90° PG 29 GY	34	63	12	24,5	51	44
5550 6790	SILVYN® FPAG 90° PG 36 GY	42	87	12	39	63	57
5550 6800	SILVYN® FPAG 90° PG 48/1 GY	54	89	15	49,5	76	70
5550 6820	SILVYN® FPAG 90° PG 48/2 GY	67	105	15	49,5	90	70
5550 6710	SILVYN® FPAG 90° PG 7 GY	10	24	8	6,5	19	16
<b>Black</b>							
5550 6715	SILVYN® FPAG 90° PG 7 BK	10	24	8	6,5	19	16
5550 6725	SILVYN® FPAG 90° PG 9 BK	13	36	10	10,5	24	22
5550 6735	SILVYN® FPAG 90° PG 11 BK	16	39	10	10,5	29	24
5550 6745	SILVYN® FPAG 90° PG 13,5/1 BK	16	40	11	14	29	26
5550 6755	SILVYN® FPAG 90° PG 13,5/2 BK	18	42	11	14	32	26
5550 6815	SILVYN® FPAG 90° PG 13,5/3 BK	21	42	11	14	32	26
5550 6765	SILVYN® FPAG 90° PG 16 BK	21	42	11	14	32	27
5550 6775	SILVYN® FPAG 90° PG 21 BK	28	54	12	19	44	35
5550 6785	SILVYN® FPAG 90° PG 29 BK	34	63	12	24,5	51	44
5550 6795	SILVYN® FPAG 90° PG 36 BK	42	87	12	39	63	57
5550 6805	SILVYN® FPAG 90° PG 48/1 BK	54	89	15	49,5	76	70
5550 6825	SILVYN® FPAG 90° PG 48/2 BK	67	105	15	49,5	90	70
5550 6715	SILVYN® FPAG 90° PG 7 BK	10	24	8	6,5	19	16

For more information please see our current catalogue. Please do not hesitate to contact our laboratory if there are any questions regarding resistance against aggressive agents and special oil.

Creator: M. Wegerer /PDP Released: DAMU1/PDP	Document: DB55506715EN Version: 02	Page 2 of 2
---	---------------------------------------	-------------