

61794155	DATA SHEET	
Valid from: 26.08.2019	SILVYN® HF	

The SILVYN® HF is an angled tube connector with flange and four mounting holes.

Material:

Polyamide

Technical Features:

Nominal width

NW 13,5 up to NW 48

Protection class

IP65 acc. to EN 60529

Temperature range

In combination with SILVYN® HCC

-25°C up to +105°C

Additional features:

Free of halogen

acc. to IEC60754-1

UV-Resistant

Color:

Black


Reference standards:

IEC 61386-1

IEC 61386-23

Suitable conduits:

SILVYN® HCC

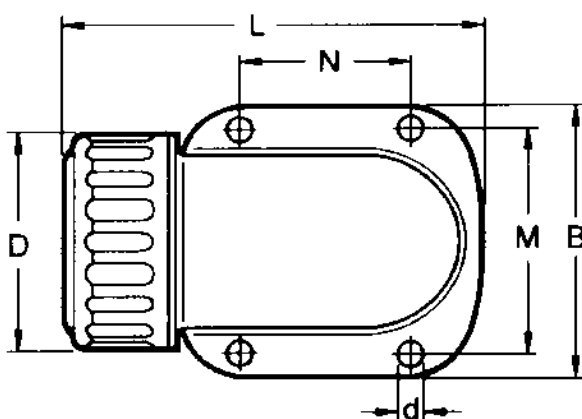

Dimension table:

Part No.	Description	L mm	High mm	B mm	M mm	N mm	D mm	d mm
6179 4155	SILVYN® HF 13,5	65	36	41	33	27	30	4,2
6179 4160	SILVYN® HF 16	76	42	45	37	30	37	4,2
6179 4170	SILVYN® HF 21	90	50	56	46	37	45	5,2
6179 4180	SILVYN® HF 29	111	62	70	58	45	56	6,2
6179 4190	SILVYN® HF 36	129	76	84	72	55	68	6,2
6179 4195	SILVYN® HF 48	162	96	98	84	70	82	6,2

For more information please see our current catalogue. Please do not hesitate to contact our laboratory if there are any questions regarding resistance against aggressive agents and special oil.

Creator: MAU1/PDP Released: DAMU1/PDP	Document: DB61794155EN Version: 00	Page 1 of 1
--	---------------------------------------	-------------