


65500300	DATA SHEET	
Valid from: 03.07.2018	SILVYN® KCLICK-RH	

The SILVYN® KCLICK-RH one-piece conduit holder for SILVYN® RILL with through hole for attachment by screws, rib dumping for strain relief and hinge mounted cover. For simple rapid installation, can be stacked or arranged in a line and can be used in C-profile rails.

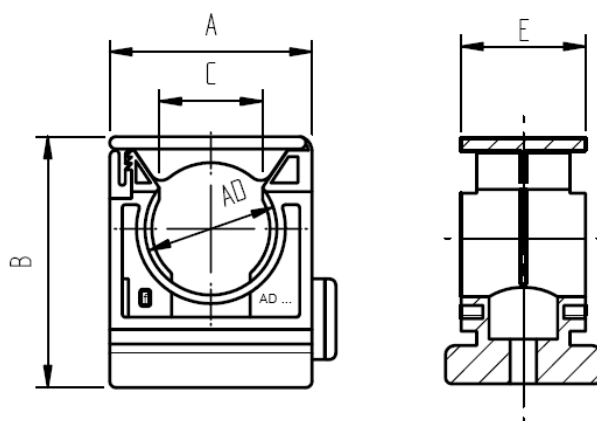

Dimension table:

Part No.	SILVYN® KCLICK-RH	Ø AD	A	B	C	E
6550 0300	PG 7	10,0	21,67	23,7	8,0	20
6550 0310	PG 9	13,0	26,00	29,0	8,5	20
6550 0320	PG 11	15,8	26,00	29,0	10,0	20
6550 0330	PG 13,5	18,5	32,5	37,0	12,5	20
6550 0340	PG 16	21,2	32,50	37,0	16,6	20
6550 0350	PG 21	28,5	43,3	50,4	20,0	20
6550 0360	PG 29	34,5	43,3	50,4	25,5	20
6550 0370	PG 36	42,5	65,00	77,0	30,0	20
6550 0380	PG 48	54,5	65,00	77,0	38,0	20

Creator: PDP Released: DAMU1/PDP	Document: DB65500300EN Version: 02	Page 1 of 2
-------------------------------------	---------------------------------------	-------------

65500300	DATA SHEET	
Valid from: 03.07.2018	SILVYN® KCLICK-RH	

Material:	Polyamide PA
Temperature range:	-40°C up to +105°C
Resistance:	fuels, mineral oil, , fat,, alkalizes, glycol, acids bases common solvents
Technical Characteristics:	tensile strength 50 – 80 N/mm ² Stress-E-module 1250 – 3700 N/mm ²



Approvals:	File Nr. E308201
-------------------	------------------

Please do not hesitate to contact our laboratory if there are any questions regarding resistance against aggressive agents and special oil.

For more information please see our current catalogue. Please do not hesitate to contact our laboratory if there are any questions regarding resistance against aggressive agents and special oil.

Creator: PDP Released: DAMU1/PDP	Document: DB65500300EN Version: 02	Page 2 of 2
-------------------------------------	---------------------------------------	-------------