










We are **Amphenol**, a GLOBAL LEADER in providing YOU with INTERCONNECTONS and SOLUTIONS.

We fulfill your interconnect requirements, freeing you up to focus on your core business. WE RECOGNIZE YOUR REQUIREMENTS AS OUR TOP PRIORITY and are committed to constantly meeting and exceeding your expectations.



What Are AT Series™ Connectors?

Amphenol Sine Systems AT Series[™] connectors were designed as a high-performance, cost-effective solution to be used within the Heavy Equipment, Agricultural, Automotive, Military, Alternative Energy and other demanding interconnect architectures. The AT Series[™] connectors contain superior environmental seals, seal retention capabilities and feature Amphenol Sine Systems RockSolid[™] Contact technology. In addition, all of our AT Series[™] connectors have been developed to be completely compatible with all other existing standard products industry-wide.

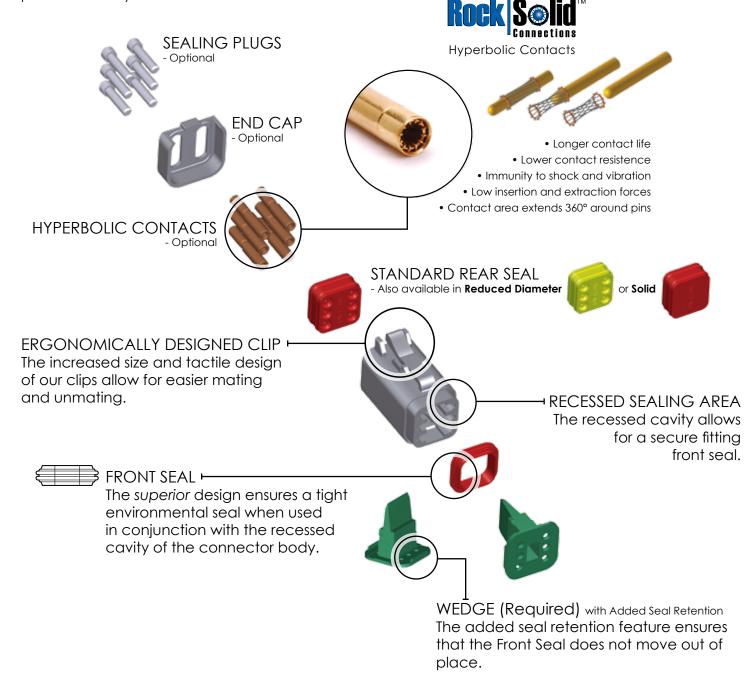

AT Series™ Specifications

The connector design incorporates an integral latching system that ensures a definitive electrical and mechanical connection.

Connector housings are manufactured with a thermoplastic material that is not only durable, but has excellent UV resistance, dielectric/mechanical properties and environmentally RoHS compliant.

The sealing system is comprised of a front and rear silicone, multi-sealing, perimeter against environmental ingress.

Contacts are derived from quality copper alloy to ensure an electrically-reliable connection. For applications demanding higher levels of performance, you can rely on our RockSolidTM contact technology.

Performance Criteria

CURRENT CAPACITY No. 16, 13 amps (max)

WIRE RANGE No 16 contacts will accept wire ranges of 14 thru 20 awg

TEMPERATURE Operating temperature range: -55°C to +125°C at rated current

DIELECTRIC VALUE Meets or exceeds 1500 volts minimum

FLAME RESISTANCE All dielectric materials have a flammability rating of UL94 HB or better

DROP TEST Shall not become detached or loosened when placed at 750mm and dropped to concrete eight times

SHOCK No latch disengagement or discontinuity shall be the result when subjected to 50 g's in each of three

axis (X, Y & Z)

VIBRATION Continued continuity without degradation to mechanical or physical attributes following vibration.

(max acceleration 20 g's at Sine sweep of 10-2000Hz)

CONNECTOR TERMINAL When subjected to a direct pull, size 14-20 achieves minimum pull-out force of 110 newtons

CONNECTOR RETENTION

RETENTION

EIENIION

A mated connector subjected to a pulling force by the exiting wire bundle at 111 newtons times the number of contacts to a maximum of 444 newtons applying load for 30 seconds

THERMAL SHOCK Subjected to 10 cycles at -55°C to +125°C with no cracking, chipping or other damage detrimental to

the normal operation of the connector

INSULATION RESISTANCE Insulation resistance at 25°C shall be greater than 20 megohms when 1000 VDC are applied

MATING CYCLE DURABILITY Following 100 cycles of connection engagement and disengagement, degradation either mechanical

or electrical is not evident

CONTACT MILLIVOLT DROP No. 16 contacts with 16 awg conductor - *100 millivolt drop max at 13 amps test current

ULTRAVIOLET EFFECTS Test the mated connectors for 1000 hours per ASTM G 154 or ASTM G 153 with 20 hours UV and 4 hours

of condensation for each cycle

WATER IMMERSION A mated connection, properly wired, placed in an oven at +125°C for 1 hour, then placed immediately

in a depth of water of 1 meter for 4 hours without loss of electronic performance


Product Material


HOUSINGS Thermoplastic
SEALS Silicone Elastomer
SECONDARY LOCKS Thermoplastic


CONTACTS Copper Alloy, Nickel Plated, Gold optional





AT SeriesTM Receptacles, Plugs And Wedges - 2, 3, 4 and 6 Position Note: the views shown below are mating face views

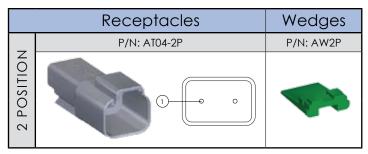


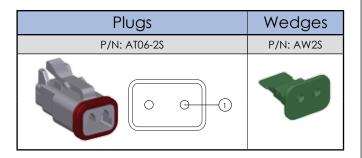


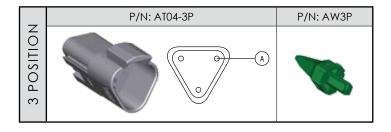


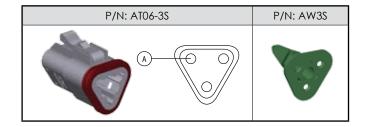


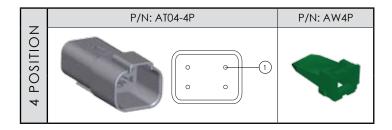

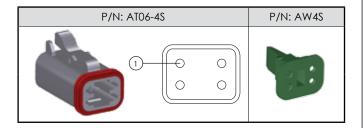


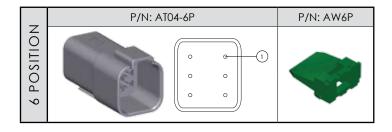

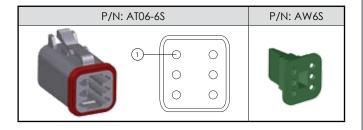


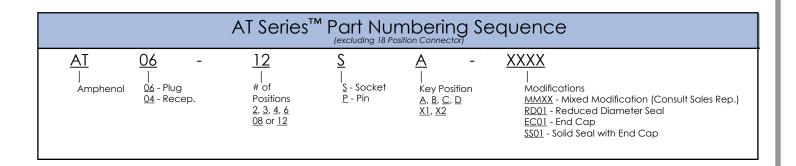



AT SeriesTM Receptacles, Plugs and Wedges - 8 (A-D) Position Note: The views shown below are Mating Face Views

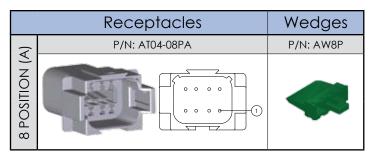



Plugs	Wedges	
P/N: AT06-08SA	P/N: AW8S	
1 0000	***	

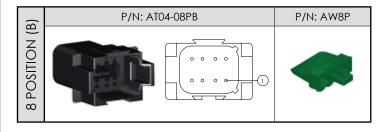


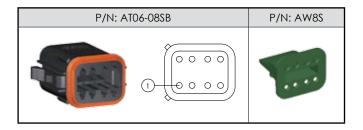


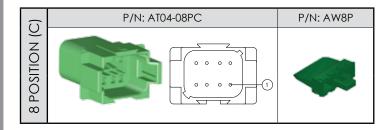

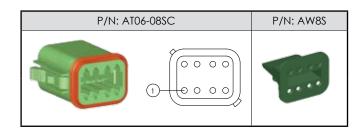

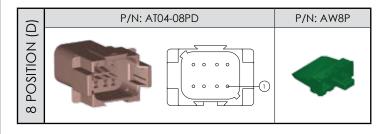

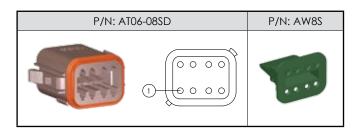


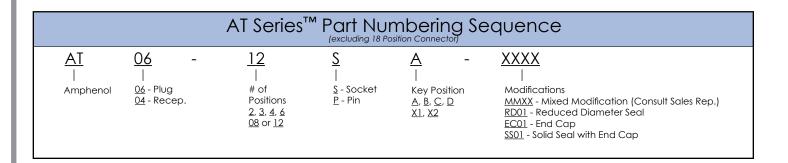



AT SeriesTM Receptacles, Plugs and Wedges - 12 (A-D) Position Note: The views shown below are Mating Face Views


	Receptacles	Wedges
(A)	P/N: AT04-12PA	P/N: AW12P
12 POSITION (,		


Plugs	Wedges
P/N: AT06-12SA	P/N: AW12S
1 00000	

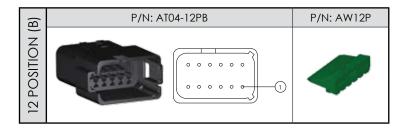


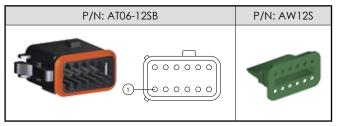


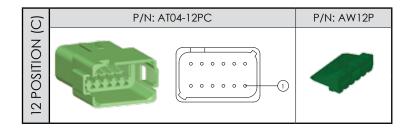

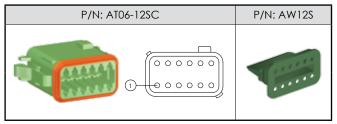

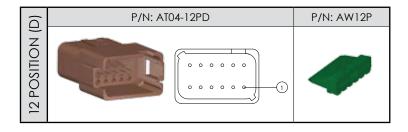

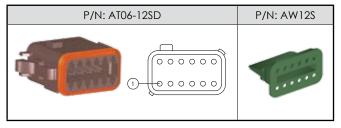


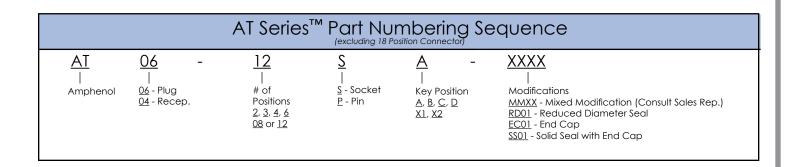

AT SeriesTM Plugs, Wedges and Connectors - 12 and 18 Position Note: The views shown below are Mating Face Views

	Plug	Wedge
(X1)	P/N: AT06-12SX1	P/N: AW12S
12 POSITION (X	1 00000	

	Plug	Wedge
2)	P/N: AT06-12SX2	P/N: AW12S
12 POSITION (X2)	1 00000	1

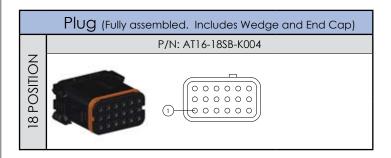

AT SeriesTM Optional Modifications with Part Numbering Sequencing

<u>AT</u> Amphenol	XX - <u>06</u> - Plug <u>04</u> - Receptacle	XX # of Positions 2, 3, 4, <u>6</u> 08, 12 or 18	X <u>S</u> - Socket <u>P</u> - Pin	Key Position A. B. C. D X1, X2
<u>AT</u> Amphenol	XX - 06 - Plug 04 - Receptacle	# of Positions 2, 3, 4, <u>6</u> 08, 12 or 18	X S - Socket P - Pin	X - Key Position A, B, C, D X1, X2
<u>AT</u> Amphenol	XX – 06 - Plug 04 - Receptacle	XX # of Positions 2, 3, 4, 6 08, 12 or 18	X S-Socket P-Pin	X - Key Position A, B, C, D X1, X2
<u>AT</u> Amphenol	XX - 06 - Plug 04 - Receptacle	XX # of Positions 2, 3, 4, 6 08, 12 or 18	X S - Socket P - Pin	X - Key Position A, B, C, D X1, X2

EC01

END CAP

- End Cap • Standard Seal
- (.088 .145 range)

<u>RD01</u>

REDUCED DIAMETER • Reduced Seal (.053 - .120 range)



<u>MM01</u>

MIXED MODIFICATION

- End Cap
- Reduced Seal (.053 - .120 range)





SS01

SOLID SEAL

- End Cap
- Solid Seal





Note: All dimensions are in inches. Customized Colors

Amphenol Sine Systems is able to produce your parts in a range of colors allowing you complete control over your project. Below is a sampling of the colors available. Please contact a Sales Representative for more details.





What are AHD Series™ Connectors?

Amphenol Sine Systems AHD Series[™] Connectors were developed in response to the overwhelming need for an economic alternative to today's existing diagnostic product options. Designed specifically as a cost-conscious, reliable alternative, intermateable to industry standard 6 and 9 pin connectors, the AHD Series[™] is ideal for any situation where either controlled and/or uncontrolled environmental conditions exist.

Amphenol Sine Systems AHD Series™ Connectors offer both a smooth, non-sealing option for controlled applications, as well as an environmentally-sealed, threaded option for more demanding applications. The same applies for our DiagnosticGrade™ Cable Assemblies in that we provide both options for our customers.

Features and Advantages

INTEGRATED ALIGNMENT KEYS
STRONG THERMOPLASTIC HOUSING
OPERATING TEMPERATURE RANGE
ECONOMICALLY SOUND
ROHS COMPLIANT
UL Approval

Tactile verification for blind mating
Extended service life

-55°C TO +125°C - Wide range compatibility

Low overall cost

Environmentally friendly Certified and compliant

Performance Criteria

CONTACT CURRENT RATING

 $\textbf{DiagnosticGrade}^{\intercal} \textbf{ / Military Style:} \ At +125^{\circ}\text{C}, \ continuous, less thru wire: } \#12 \ contact = 25 \ amps \ max. \ current;$

#16 contact = 13 amps max. current

PHYSICAL SHOCK

Military Style: No locking, unmating or other unsatisfactory result after 50 g's in each of three mutually

perpendicular planes.

DIELECTRICAL STRENGTH DiagnosticGrade™ / Military Style: 1500 volts minimum

VIBRATION Military Style: Maintains continuity and exhibits no mechanical or physical damage after vibration.

(20 g's at 10-2000 Hz)

TEMPERATURE DiagnosticGrade™ / Military Style: Operating temperature range: -55°C TO +125°C at rated current.

INSULATION RESISTANCE DiagnosticGrade™ / Military Style: 1000 megohms minimum at 25°C.

DiagnosticGrade™ / Military Style: No electric or mechanical defects after 100 cycles of engagement

and disengagement.

CORROSION RESISTANCE DiagnosticGrade™ / Military Style: Connectors show no evidence of corrosion after exposure to 48 hours of

salt spray per MIL-STD 1344 method 1001.

Product Material

DURABILITY

HOUSINGS Thermoplastic
SEALS Silicone Elastomer

CONTACTS Copper Alloy/Gold plated




AHD Series™ Receptacles, Plugs and Caps - 6 Pin

The AHD Series[™] products listed below provide a quick connection between Amphenol Sine Systems 6 Pin products and equivalent industry 6 Pin products.





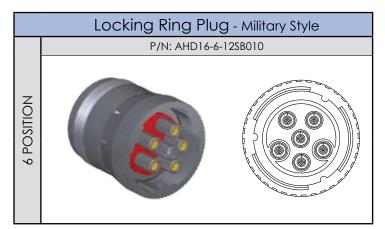






AHD Series[™] Receptacles and Plugs - 9 Pin (J1939)

The AHD Series[™] products listed below provide a quick connection between Amphenol Sine Systems 9 Pin products and equivalent industry 9 Pin products.





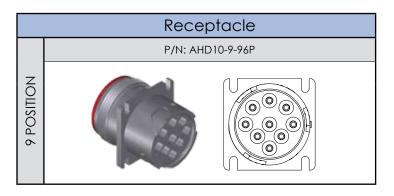














Pin Contacts, Socket Contacts and Tooling

The AHD Series[™] products listed below provide a quick connection between Amphenol Sine Systems 6 Pin products and equivalent industry 6 Pin products. **Note:** All dimensions are in Inches.

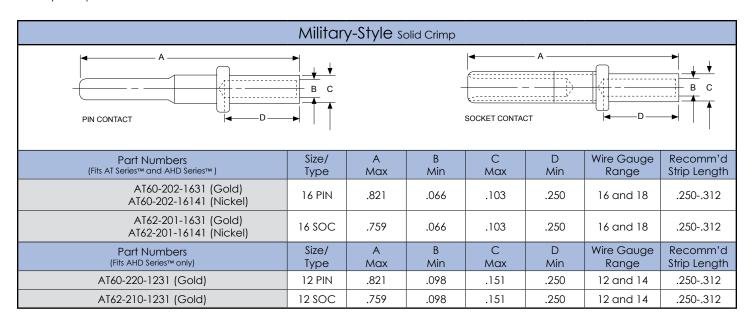

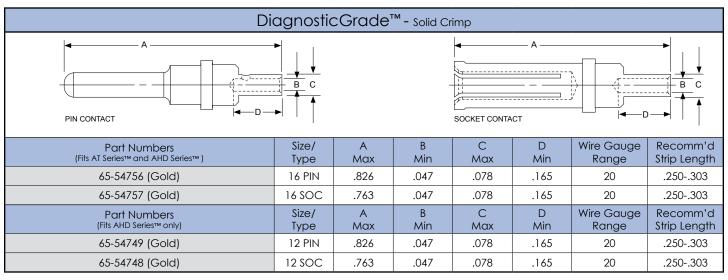

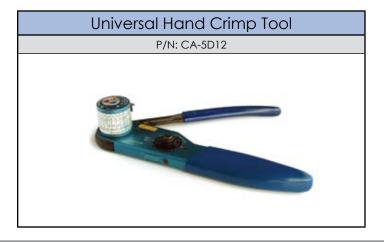





Listed below are quick reference illustrations for RockSolid™ and stamped and formed crimp options, as well as the Amphenol Sine Systems part numbers.




Hyperbolic Contacts

- Longer contact life
- Lower contact resistence
- Immunity to shock and vibration
- Low insertion and extraction forces
- Contact area extends 360° around pins

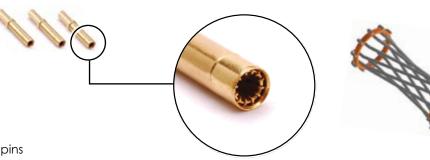

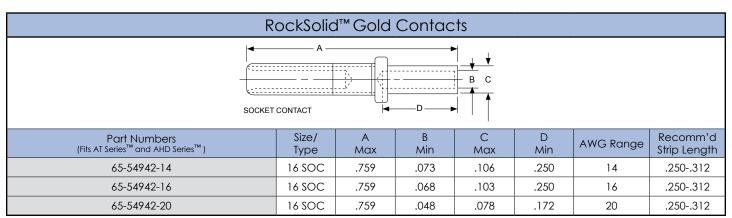

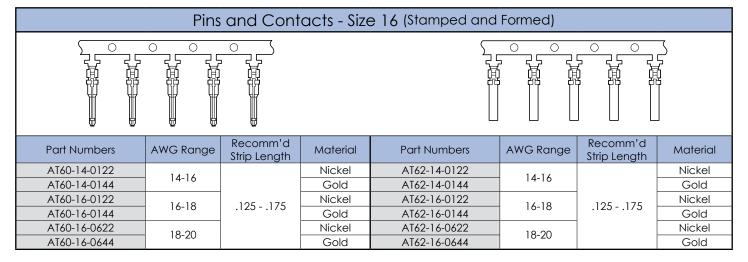






Plug Assembly - Contact and Wedge Insertion



1. Grasp crimped contact approx. one inch behind the contact barrel.



2. Hold connector with rear grommet facing you.



Push contact straight into connector until a 'click' is felt. A slight tug will confirm placement.



4. Insert wedge into connector.



5. A 'click' will be felt when the wedge is fully installed.

Plug Assembly - Contact and Wedge Removal



 Remove wedge by inserting a flathead screwdriver head underneath the lip of the wedge.



2. Twist the flathead screwdriver until wedge 'pops' out of connector.



3. Use the same flathead screwdriver to remove contact inside connector.



Receptacle Assembly - Contact and Wedge Insertion



1. Grasp crimped contact approx. one inch behind the contact barrel.



2. Hold connector with rear grommet facing you.



Push contact straight into receptacle until a 'click' is felt. A slight tug will confirm placement.



4. Insert wedge into receptacle.




5. A 'click' will be felt when the wedge is fully installed.

Receptacle Assembly - Contact and Wedge Removal



1. Remove wedge by inserting a hook into an opening of the wedge.



2. Pull until wedge 'pops' out of receptacle.



3. Remove wedge.

NORTH AMERICA

Amphenol Sine Systems MICHIGAN

44724 Morley Drive Clinton Township, MI 48036 Toll-Free: 1-800-394-7732 Fax: 1-586-465-1216 Email: sine_info@sineco.com

EUROPE

Amphenol Air LB

29, voie d' Yvois F-08110 Blagny, France Phone: 33-3-2422-7849 Fax: 33-3-2422-7875 Email: accueil@amphenol-airlb.fr

Amphenol AIR LB GmbH

Am Kleinbahnhof 4 Saarlouis D-66740, Germany Phone: 49-6831-981-00 Fax: 49-6831-981-030 Email: info@amphenol-airlb.de

Amphenol BENELUX

Amphenol European Sales Operations P.O. Box 63, 3990 DB Houten The Netherlands Phone: (31) 30-6358000 Fax: (31) 30-6377034 E-mail: info@amphenol-nl.com

Amphenol CENTER EAST EUROPE, POLAND and AUSTRIA

Wiener Gasse 68 2380 Perchtoldsdorf, Austria Phone: 43-699-10396071 Fax: 43-699-40396071 Email: c.czesch@amphenol-roe.eu

ASIA

Amphenol Sine Systems CHINA
2/F Building A5, Hua Feng Technology Park
Guan Tian, Bei Huan Road, Shi Yan Street
Bao An District, Shenzhen, China 518108
Tel: 86-755-8173-8000 ext. 8098
Fax: 86-755-8173-8180
Email: fount.nee@amphenolpcd.com.cn

Amphenol INTERCONNECT INDIA PRIVATE LTD

105 Bhosari Industrial Area Pune 411 026, India Phone: 91-20-712-0363/0463/0155 Fax: 91-20-712-0581

OTHER LOCATIONS

Amphenol MEXICO

Prolongacion Reforma 61-6 B2 Col. Paseo de las Lomas C.P. 01330 Mexico DF, Mexico Phone: 52-55-5258-9984 Fax: 52-55-5081-6890 Email: www.amphenolmexico.com

Amphenol ARGENTINA

Avenida Callao 930 2nd floor Office B Plaza C1023AAP Buenos Aires, Argentina Phone: 54-11-4815-6886 Fax: 54-11-4814-5779

Amphenol BRASIL LTDA

Rua Diogo Moreira, 132 20 Andar, Rooms 2001-2-3 CEP 05423-101 Sao Paulo- SP, Brazil Phone: 55-11-3815-1003 Fax: 55-11-3815-1629 Email: vendas@amphenol.com.br

Amphenol ESPANA
Edificio Burgosol, Oficina N 55
C/Comunidad de Madrid, 35 bis
Las Rozas (Madrid), 28230
Phone: 34-91-6407302
Mobile: 34-629054629
Fax: 34-91-6407307 Email: e.bendix@amphenol-roe.eu

Amphenol ITALIA

Via Barbaiana 5 20020 Lainate, Milano, Italy Phone: 39-02-932541 Fax: 39-02-93254444 Email: r.buscone@amphenol-roe.eu

Amphenol NORDIC

Appelboms vag 2 SE-18642 Vallentuna, Sweden Phone: 46-76-8418600 Fax: 46-70-2203197 Email: f.weden@amphenol-roe.eu

Amphenol SOCAPEX

948, Promenade de l'Arve - BP 29 74311 Thyez CEDEX, France Phone: 33(0)4-50-89-28-40 Fax: 33(0)4-50-96-29-75 Email: jocelyne.anthoine@amphenol-

Amphenol DAESHIN

Ampnenoi Datshin 558. Songnae-2 Dong. SoSa-Gu Bucheon City, Gyeonggi-do, Korea 422-818 Phone: 81-32-610-3800 Fax: 81-32-673-2507 Email: info@amphenol.co.kr

Amphenol JAPAN

471-1, Deba, Ritto-city shiga 520-3041, Japan Phone: 81-77-553-8501 Fax: 81-77-551-2200

Amphenol SOUTH AFRICA

30 İmpala Road 2196 Sandton, Chislehurston South Africa Phone: 27-11-783-9517 Fax: 27-11-783-9519 Email: amphenol_africa@csi.com

Amphenol AUSTRALIA PTY LIMITED

2 Fiveways Blvd., Keysborough Melbourne, Victoria 3173 Australia Phone: 613-8796-8888 Fax: 613-8796-8801

Amphenol TURKEY

Ayazaga Mah. Meyden Sk. No. 28 Beybi Giz Plaza, Kat. 26 34396 Maslak/Istanbul, Turkey Phone: 90-212-335-2501 Fax: 90-212-335-25-00

Amphenol SWITZERLAND & SOUTH CENTER EUROPE

Switzerland, Slovenia, Serbia, Montenegro, Yugoslavia, Greece, Bulgaria 948, Promenade de l'Arve - BP29 743,11 Thyez - France Phone: 33-4-50-89-28-00 Fax: 33-4-50-96-29-75

Amphenol TUCHEL GmbH

August-Haeusser-Strasse 10 Heilbronn, 74080 Germany Phone: 49(0)-7131-929-0 Fax: 49(0)-7131-929-486 Email: info@amphenol.de

Amphenol LIMITED

Thanet Way, Whitstable Kent CT5 3JF, United Kingdom Phone: 44-1-227-773200 Fax: 44-1-227-276571

Amphenol TERRIER TECHNOLOGIES

Unit 14, Northlake Industrial Park Malcolm Moodie Crescent, Jet Park Gauteng, South Africa Phone: 27-11-397-6069 Fax: 27-11-397-8874

Amphenol BAR TEC LTD

Amprenoi BAK IEC LID 4 Hagavish St., PO Box 279 Kfar Saba 44102, Israel Phone: 972-9-767-4097 Fax: 972-9-767-4324

Amphenol RUSSIA

8 Yaroslavskaja Street Floor 2 129164 Moscow, Russia Phone: 7495-937-6341 Fax: 7495-937-6319 Email: russia@amphenol.com

© 2010 Amphenol Sine Systems Corporation. Every effort has been made to ensure that the information contained in this catalog is accurate at the time of publication. Specifications or information stated in this publication are subject to change without notice. Reprinted 06/2010