


## RJ45 patch cable Cat.5e SF/UTP Y

6 colours

Cat.5e

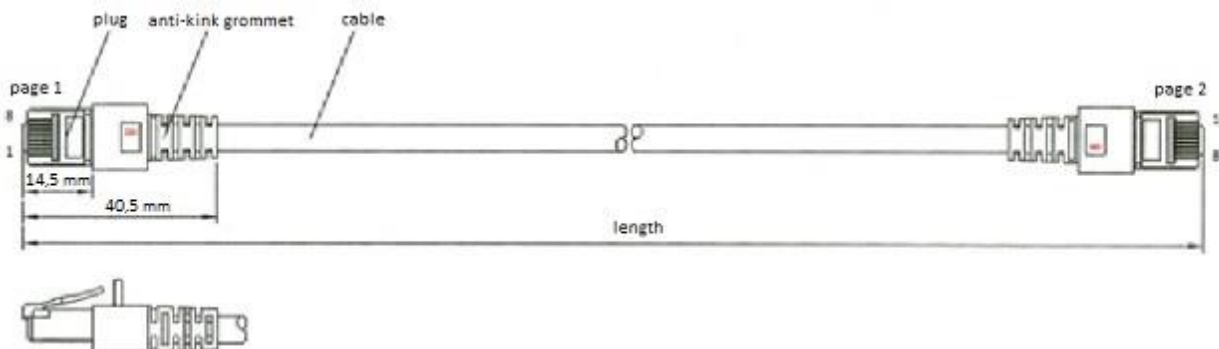

### Patch cable

<b>Type:</b>	Cat.5e patch cable, double screened
<b>Data transmission rate:</b>	2,5 Gbit/s
<b>Frequency range:</b>	100 MHz
<b>Field of application:</b>	Wiring of terminals (PCs, Switches, ...) in home und office area
<b>EG directives:</b>	2011/65/EU (RoHS, Restriction of Hazardous Substances)

Originator: Date: 08.04.2016 Name: PM - J. Burgholzer	Approval: Date: 08.04.2016 Name: PM - H. Frühwirt	Revised Date: 23.01.2020 Name: PM: J. Burgholzer	Revision: 2
Technical changes and misprints reserve. QM-Form. Nr. 88 - Rev. Nr. 0		LAPP Austria GmbH, Bremenstraße 8, 4030 Linz <a href="http://www.lappaustria.at">www.lappaustria.at</a>	

## RJ45 patch cable Cat.5e SF/UTP Y

### Conductor

<b>Cable:</b>	Cat.5e patch cable 300 MHz, tested according to ISO/IEC 11801 and EN 50173
<b>Conductor:</b>	4 x 2 x AWG 26/7
<b>Screen:</b>	SF/UTP – overall shield of plastic laminated aluminum foil and copper braid
<b>Outer sheath:</b>	PVC, silicone-free
<b>Flame retardant:</b>	According to IEC 60332-1
<b>Temperature range:</b>	-5°C to +70°C
<b>Outer diameter:</b>	Ø 5,7 mm
<b>Min. bending radius:</b>	28,5mm / 5 x cable diameter (min.)

### Connector

<b>Connector:</b>	RJ45 shielded, gold-plated contacts
<b>Bend relief:</b>	Bend relief with latch protection from PVC 75A, overmoulded, with length specification
<b>Pin assignment:</b>	EIA/TIA 568B

### Verfügbare Varianten

Length	PU	grey	yellow	red	blue	green	black
0,5m	10	2710110603	2710111103	2710110403	2710110203	2710111203	2710110103
1m	10	2710110605	2710111105	2710110405	2710110205	2710111205	2710110105
1,5m	10	2710110606	2710111106	2710110406	2710110206	2710111206	2710110106
2m	10	2710110607	2710111107	2710110407	2710110207	2710111207	2710110107
3m	10	2710110609	2710111109	2710110409	2710110209	2710111209	2710110109
5m	10	2710110610	2710111110	2710110410	2710110210	2710111210	2710110110
7,5m	5	2710110611	2710111111	2710110411	2710110211	2710111211	2710110111
10m	5	2710110612	2710111112	2710110412	2710110212	2710111212	2710110112
15m	5	2710110614	2710111114	2710110414	2710110214	2710111214	2710110114
20m	5	2710110615	2710111115	2710110415	2710110215	2710111215	2710110115
25m	5	2710110616	2710111116	2710110416	2710110216	2710111216	2710110116
30m	5	2710110617	2710111117	2710110417	2710110217	2710111217	2710110117

Originator:	Approval:	Revised	
Date: 08.04.2016	Date: 08.04.2016	Date: 23.01.2020	
Name: PM – J. Burgholzer	Name: PM – H. Frühwirt	Name: PM: J. Burgholzer	Revision: 2
Technical changes and misprints reserve.		LAPP Austria GmbH, Bremenstraße 8, 4030 Linz	
QM-Form. Nr. 88 - Rev. Nr. 0		Page 2 of 2 <a href="http://www.lappaustria.at">www.lappaustria.at</a>	