


	DATA SHEET	2170366
	ETHERLINE® H PiMF ** 2 x 2 x AWG22/1 CAT.6e	Valid from: 26.10.2006

Industrial Ethernet CAT. 6e

** UL/CSA Approval in preparation

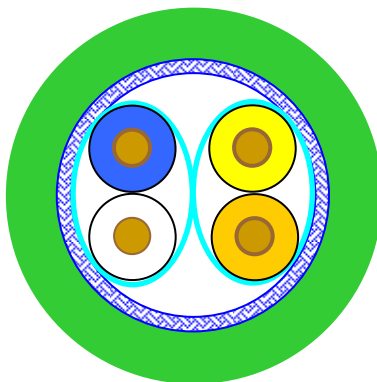

Application

High speed cable for Industrial Ethernet for fixed installations in dry, wet or damp rooms. Cable meets the transmission characteristics for Category 6e of IEC 61156-5 Ed. 2 and confirms to PROFINET installation guide. Beyond the outstanding electrical properties the halogenfree design enables these cables especially for applications wherever people, machinery and equipment are endangered by fire or smoke emission.

Design

Stranded bare copper wire $\varnothing$ 0,64 (AWG22/1)	$\varnothing$ 0.64 mm (0.025 in)
Insulation of foamed Polyethylene (PE) with skin	$\varnothing$ 1.52 mm (0.059 in) nom.
	$\varnothing$ 1.60 mm (0.063 in) max.

Core

2 cores individually screened with aluminium bonded plastic tape and stranded to form the stranded element

Sequence of colours: pair 1: white (WH)-blue (BU), pair 2: yellow (YE)-orange (OG)

Shield braiding of tinned copper wires 0.13 mm diameter (36 AWG)

Coverage approx. 85%

Non woven tape, longitudinally applied	$\varnothing$ 4.7 mm (0,185 in)
--	---------------------------------

Jacket

Special halogen free compound, green (GN)

Wall thickness approx. 0.90 mm	$\varnothing$ 6.5 $\pm$ 0.2 mm (0,256 $\pm$ 0,008 in)
--------------------------------	--

LAPP KABEL STUTTGART **ETHERLINE® H PiMF CAT. 6e**

2 x 2 x AWG22/1 SHIELDED PROFINET Type A ROHS ART. 2170366

prepared by: PD-KL Hans Euler	Document: DB2170366EN	Page 1 of 2
----------------------------------	-----------------------	-------------

	DATA SHEET		2170366
	ETHERLINE[®] H PiMF ** 2 x 2 x AWG22/1		Valid from: 26.10.2006

Electrical data at 20°C

Loop resistance	≤ 118,2 Ohm/km
Signal run time	≤ 4.7 ns/m
Insulation resistance	≥ 5 GOhm*km
Capacitance at 800 Hz	approx. 45 pF/m
Velocity of propagation	nom. 79%
Characteristic impedance:	
1 – 100 MHz	100 (±15) Ohm
100 – 500 MHz	100 (± 22) Ohm
Operating voltage (peak)	≤ 100V
Test voltage (wire/wire/screen rms 50Hz 1min)	700V

Frequency (MHz)	4	10	16	20	31.25	62.5	100
NEXT (dB) ≥	71,3	65,3	62,2	60,8	57,9	53,4	50,3
Attenuation max. (dB/100m) (dB/100ft)	3,8 (1,16)	6,0 (1,83)	7,6 (2,32)	8,5 (2,59)	10,7 (3,26)	15,5 (4,72)	19,9 (6,07)

Frequency (MHz)	155	200	250	300	500
NEXT (dB) ≥	47,4	45,8	44,3	43,1	39,8
Attenuation max. (dB/100m) (dB/100ft)	25,3 (7,71)	29,1 (8,87)	33,0 (10,1)	36,6 (11,2)	49,2 (15,0)

Other electrical requirements acc. to IEC 61156-5 Ed. 2

Mechanical and thermal characteristics

Conductor material acc. to DIN EN 13602 Cu-ETP-R460-P
Screen material acc. to DIN EN 13602 Cu-ETP-A013-C
Insulating material acc. to DIN EN 50290-2-23 (VDE 0819), table 2/B
Jacket material acc. to VDE 0207, compound type HM2
Halogenfree acc. to IEC 60754-1
Flame retardant acc. to IEC 60332-3
Stripping of sheath: min. 5 N to max. 40 N at a length of 50 mm

Other characteristics:

RoHS compliant

Permissible temperature range:	-25 °C (-13 °F) up to 80 °C (176 °F)
Min. bending radius allowed:	single 10 x Ø
Weight approx.:	62 kg/km (42 lb/1000 ft)

prepared by: PD-KL Hans Euler	Document: DB2170366EN	Page 2 of 2
----------------------------------	-----------------------	-------------